


All Metals and Long-distance Types E2V

CSM_E2V_DS_E_3_1

Aluminum and Iron Both Detectable from Long Distances



1.5 to 2 times the aluminum detection distance of previous models



Equipped with a function to prevent the detection of aluminum chips



CE



Refer to **Safety Precautions** on page 8.


For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Features


Aluminum Detection Distance: 1.5 to 2 Times Previous Models *

Immunity against aluminum chips has enabled achieving long-distance detection of aluminum workpieces. The same detection distance has also been achieved for iron, allowing the E2V-X□ to be separated from workpieces made of either metal farther than any other Proximity Sensor.

Aluminum Excellent Performance, with Aluminum Chip Immunity!

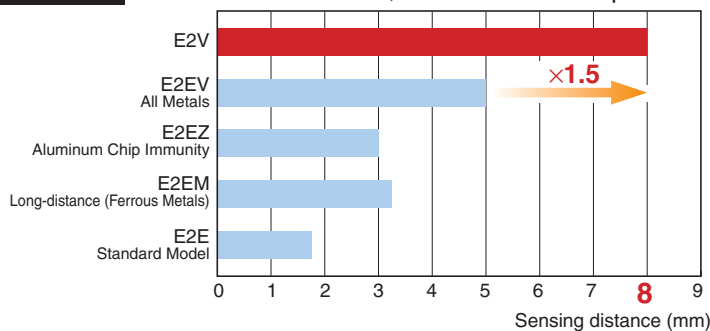


Iron Also Detects Iron at Long Distances!

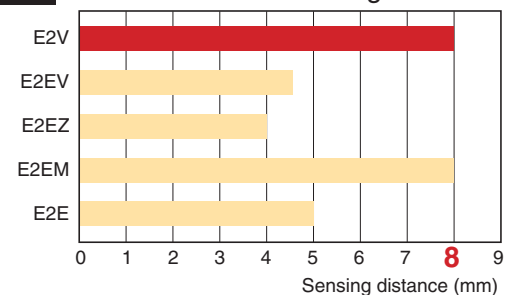

* In-house comparison of M18 Shielded Long-distance Models

Detection Made Visible

An operation indicator that is visible from any direction is provided as a standard feature. This indicator flashes under unstable conditions for easy installation condition verification at a glance.



Previous Sensor



E2V Pre-wired Models
and Pre-wired Connector Models





E2V Connector Models

Embeddable in Metal.

The first Long-distance Sensor that is shielded. Possible to be completely embedded in metal.

Embedded Mounting in Metal

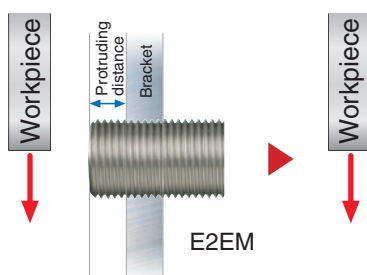


Ordering Information

Sensors (Dimensions → page 9)


Standard-distance type

DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)

Appearance		Sensing distance			Output	Model	
						Operation mode NO	Operation mode NC
	M12	2 mm			PNP	E2V-X2B1 2M	E2V-X2B2 2M
					NPN	E2V-X2C1 2M	E2V-X2C2 2M
	M18	5 mm			PNP	E2V-X5B1 2M	E2V-X5B2 2M
					NPN	E2V-X5C1 2M	E2V-X5C2 2M
	M30	10 mm			PNP	E2V-X10B1 2M	E2V-X10B2 2M
					NPN	E2V-X10C1 2M	E2V-X10C2 2M


Long-distance type

DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)

Appearance		Sensing distance			Output	Model	
						Operation mode NO	Operation mode NC
	M12	4 mm			PNP	E2V-X4B1 2M	E2V-X4B2 2M
					NPN	E2V-X4C1 2M	E2V-X4C2 2M
	M18	8 mm			PNP	E2V-X8B1 2M	E2V-X8B2 2M
					NPN	E2V-X8C1 2M	E2V-X8C2 2M
	M30	15 mm			PNP	E2V-X15B1 2M	E2V-X15B2 2M
					NPN	E2V-X15C1 2M	E2V-X15C2 2M


Long-distance type

DC 3-wire, Connector Models

Appearance		Sensing distance			Output	Model	
						Operation mode NO	Operation mode NC
	M12	4 mm			PNP	E2V-X4B1-M1	E2V-X4B2-M1
					NPN	E2V-X4C1-M1	E2V-X4C2-M1
	M18	8 mm			PNP	E2V-X8B1-M1	E2V-X8B2-M1
					NPN	E2V-X8C1-M1	E2V-X8C2-M1
	M30	15 mm			PNP	E2V-X15B1-M1	E2V-X15B2-M1
					NPN	E2V-X15C1-M1	E2V-X15C2-M1

Long-distance type


DC 3-wire, Smartclick Pre-wired Connector (M12) Models

Appearance		Sensing distance			Output	Model
						Operation mode NO
	M12	4 mm			PNP	E2V-X4B1-M1TJ 0.3M
					NPN	E2V-X4C1-M1TJ 0.3M
	M18	8 mm			PNP	E2V-X8B1-M1TJ 0.3M
					NPN	E2V-X8C1-M1TJ 0.3M
	M30	15 mm			PNP	E2V-X15B1-M1TJ 0.3M
					NPN	E2V-X15C1-M1TJ 0.3M

Accessories (Order Separately)



Sensor I/O Connectors (M12, Sockets on One Cable End)  (Required for models with Pre-wired Connectors.) A Connector is not provided with the Sensor. Be sure to order a Connector separately.

(Dimensions → XS5)

Appearance	Type	Cable length	Model	Applicable Proximity Sensor Models
Smartclick Connector, Straight 	Standard cable	2 m	XS5F-D421-D80-F	E2V-X□B1-M1TJ E2V-X□C1-M1TJ
		5 m	XS5F-D421-G80-F	
	Oil-resistant polyurethane cable	2 m	XS5F-D421-D80-P	
		5 m	XS5F-D421-G80-P	

Sensor I/O Connectors (M12, Sockets on One Cable End) Standard type (Required for models for Connectors.) A Connector is not provided with the Sensor. Be sure to order a Connector separately.

(Dimensions → XS2)

Appearance	Cable length	Sensor I/O Connector model number	Applicable Proximity Sensor Models
Straight 	2 m	XS2F-D421-DC0-F	E2V-X□C1-M1 E2V-X□B1-M1
	5 m	XS2F-D421-GC0-F	
	2 m	XS2F-D421-D80-F	E2V-X□C□-M1 E2V-X□B□-M1
	5 m	XS2F-D421-G80-F	
L-shape 	2 m	XS2F-D422-DC0-F	E2V-X□C1-M1 E2V-X□B1-M1
	5 m	XS2F-D422-GC0-F	
	2 m	XS2F-D422-D80-F	E2V-X□C□-M1 E2V-X□B□-M1
	5 m	XS2F-D422-G80-F	

Ratings and Specifications

Size		M12		M18		M30	
Item	Model	E2V-X2□□	E2V-X4□□	E2V-X5□□	E2V-X8□□	E2V-X10□□	E2V-X15□□
Sensing distance		2 mm±10%	4 mm±10%	5 mm±10%	8 mm±10%	10 mm±10%	15 mm±10%
Set distance		0 to 1.6 mm	0 to 3.2 mm	0 to 4.0 mm	0 to 6.4 mm	0 to 8.0 mm	0 to 12.0 mm
Differential travel		10% max. of sensing distance					
Detectable object		Ferrous metals and non-ferrous metals (The sensing distance depends on the material of the sensing object. Refer to <i>Engineering Data (Reference value)</i> .)					
Standard sensing object		Aluminum: 12 × 12 × 3 mm	Aluminum: 12 × 12 × 3 mm	Aluminum: 18 × 18 × 3 mm	Aluminum: 24 × 24 × 3 mm	Aluminum: 30 × 30 × 3 mm	Aluminum: 45 × 45 × 3 mm
Response frequency *		150 Hz	40 Hz	70 Hz	40 Hz	70 Hz	30 Hz
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.					
Current consumption		450 mW max. (Current consumption: 15 mA max. at power supply voltage of 30 V)					
Control output	Load current	Open-collector output, 100 mA max.					
	Residual voltage	2 V max. (Load current: 100 mA, Cable length: 2 m)					
Indicators		NO Models: Operation indicator (yellow) (flashing), Setting indicator (yellow) (lit); NC Models: Operation indicator (yellow) (lit)					
Operation mode		B1/C1 Models: NO B2/C2 Models: NC (Refer to the timing charts under <i>I/O Circuit Diagrams</i> for details.)					
Protection circuits		Power supply reverse polarity protection, reversed output polarity protection, load short-circuit protection, surge suppressor					
Ambient temperature		Operating/Storage: -25 to 70°C (with no icing or condensation)					
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence		Based on the sensing distance at 23°C in the temperature range of -25 to 70°C					
		±10% max.	±15% max.	±10% max.	±15% max.	±10% max.	±15% max.
Voltage influence		±1.5% max. of sensing distance at rated voltage in the rated voltage ±15% range					
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength		1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case					
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance		Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions					
Degree of protection		IEC IP67 (Pre-wired Models and Pre-wired Connector Models are oil-resistant to the OMRON in-house standard.)					
Connection method		Pre-wired Models (Standard cable length: 2 m), Connector Models, Pre-wired Connector Models (Standard cable length: 300 mm)					
Weight (packed state)	Cable	Approx. 120 g		Approx. 150 g		Approx. 200 g	
	Connector	Approx. 30 g		Approx. 45 g		Approx. 120 g	
	Pre-wired Connector Models	Approx. 50 g		Approx. 70 g		Approx. 140 g	
Materials	Case	Nickel-plated brass					
	Sensing surface	Heat-resistant ABS					
	Clamping nuts	Nickel-plated brass					
	Toothed washer	Zinc-plated iron					
Accessories		Instruction manual					


* The response frequency is an average value.

Measurement conditions are as follows: Standard sensing object, a distance between target objects of twice the size of the standard sensing object, and a set distance of half the sensing distance.


Engineering Data (Reference Value)

Influence of Sensing Object Size and Material


E2V-X2

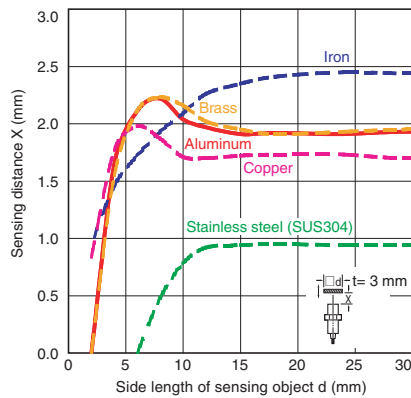


E2V-X4

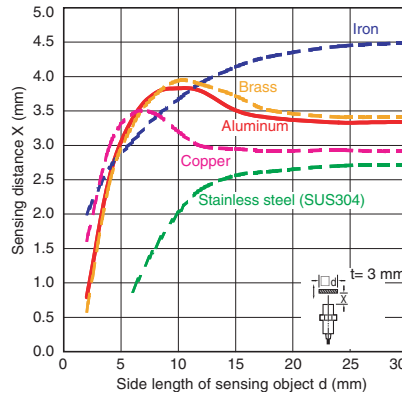


E2V-X5

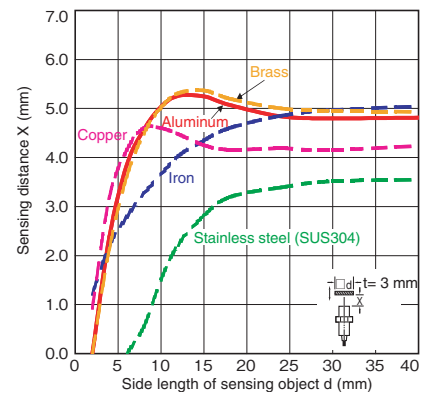


E2V-X8

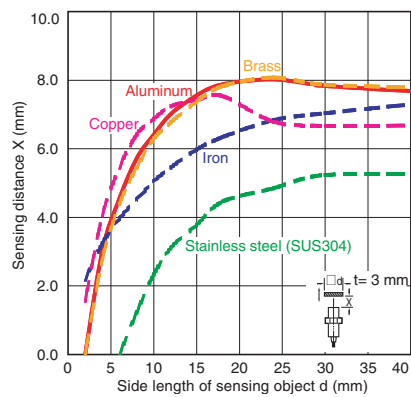

E2V-X10

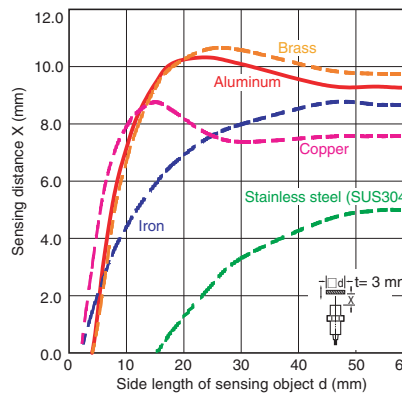


E2V-X15

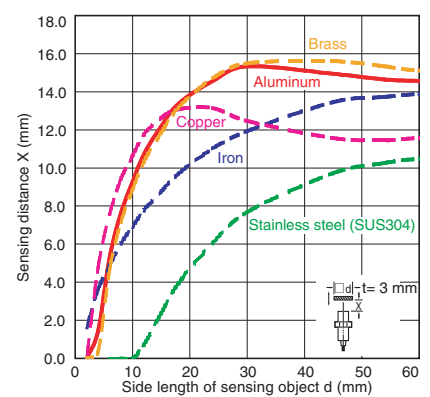


Influence of Sensing Object Size and Material


E2V-X2

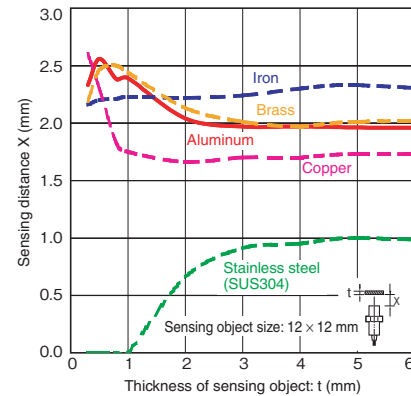


E2V-X4

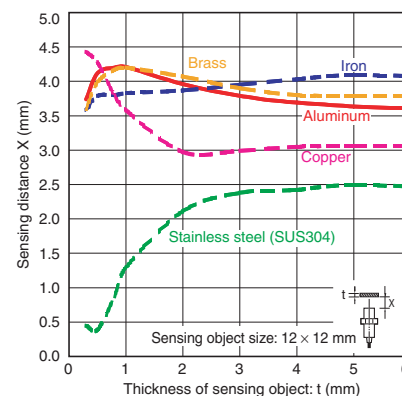


E2V-X5

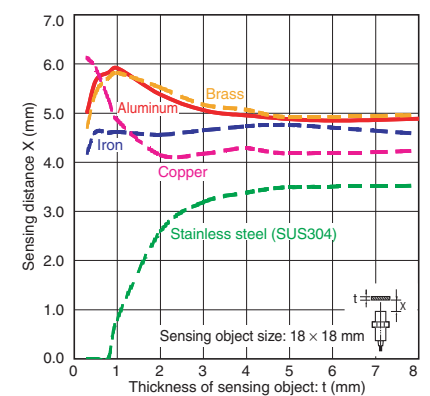


E2V-X8

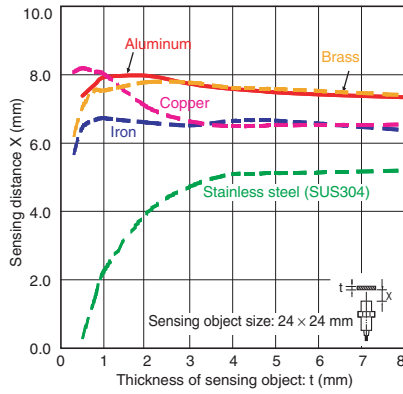



E2V-X10

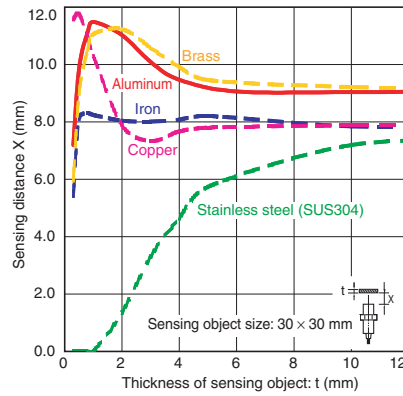

E2V-X15

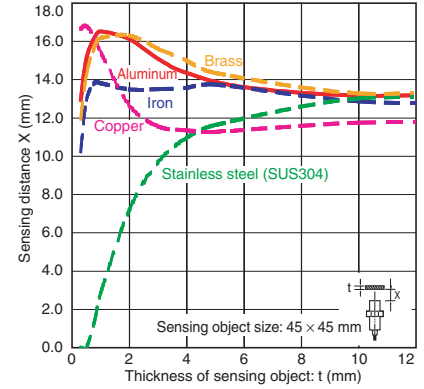

Sensing Area

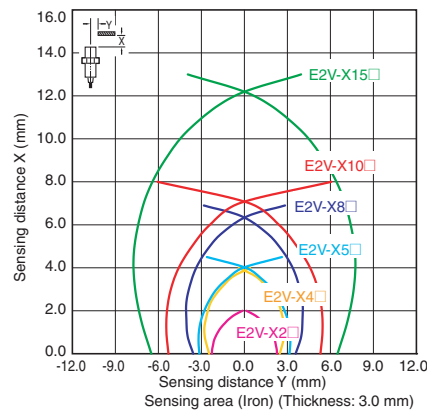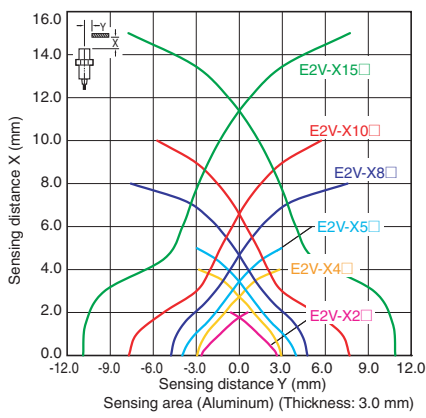

I/O Circuit Diagrams

NPN Output

Model	Operation mode	Timing diagram	Output circuit
E2V-X□C□ (-M1/-M1TJ)	NO	<p>Non-sensing area Unstable sensing area Stable sensing area Set position</p> <p>Sensing object Proximity sensor</p> <p>(%) 100 80 0</p> <p>Rated sensing distance</p> <p>Yellow indicator: ON, OFF, ON, OFF</p> <p>Control output: ON, OFF</p>	<p>Proximity Sensor main circuit</p> <p>Brown ① +V</p> <p>Black ④/② Load</p> <p>Blue ③ 0 V</p>
	NC	<p>Non-sensing area Sensing area</p> <p>Sensing object Proximity sensor</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>Yellow indicator: ON, OFF, ON, OFF</p> <p>Control output: ON, OFF</p>	<p>Note: Connector Models</p> <p>NO Models: ①④③</p> <p>NC Models: ①②③</p> <p>M1: ② ①</p> <p>M1TJ: ③ ④</p> <p>Compatible Connector Cables: XS5F Series XS2F Series</p>

PNP Output

Model	Operation mode	Timing charts	Output circuit
E2V-X□B□ (-M1/-M1TJ)	NO	<p>Non-sensing area Unstable sensing area Stable sensing area</p> <p>Sensing object</p> <p>Proximity sensor</p> <p>(%) 100 80 0</p> <p>Rated sensing distance</p> <p>ON OFF Yellow indicator</p> <p>ON OFF Control output</p>	<p>Brown ① +V</p> <p>Black ④/② Load</p> <p>Blue ③ 0V</p> <p>Note: Connector Models NO Models: ①④③ NC Models: ①②③</p> <p>M1: M1TJ:</p> <p>Compatible Connector Cables: XS5F Series XS2F Series</p>
	NC	<p>Non-sensing area Unstable sensing area Stable sensing area</p> <p>Sensing object</p> <p>Proximity sensor</p> <p>(%) 100 80 0</p> <p>Rated sensing distance</p> <p>ON OFF Yellow indicator</p> <p>ON OFF Control output</p>	<p>Brown ① +V</p> <p>Black ④/② Load</p> <p>Blue ③ 0V</p> <p>Note: Connector Models NO Models: ①④③ NC Models: ①②③</p> <p>M1: M1TJ:</p> <p>Compatible Connector Cables: XS5F Series XS2F Series</p>

Connections for Sensor I/O Connectors

Proximity Sensor			Sensor I/O Connector model number	Connections
Type	Operation mode	Model		
DC 3-wire	NO	E2V-X□C1-M1 E2V-X□B1-M1		
	NC	E2V-X□C2-M1 E2V-X□B2-M1		

Refer to *Introduction to Sensor I/O Connectors/Sensor Controllers* for details.

Safety Precautions

Refer to the *Proximity Sensors Technical Guide*.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purposes.



Never use the product with an AC power supply. Otherwise, explosion may result.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

Designing

Influence of Surrounding Metal

When embedding the Sensor in metal, be sure that the clearances given in the following table are maintained.

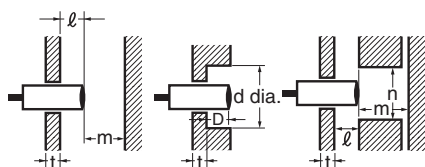


Table 1. Influence of Surrounding Metal (Unit: mm)

Item	Model	E2V-X2	E2V-X5	E2V-X10
l		0	0	0
d dia.		12	18	30
D		0	0	0
m		12	24	45
n		18	27	45

Item	Model	E2V-X4	E2V-X8	E2V-X15
l		0	0	0 *
d dia.		12	18	30 *
D		0	0	0 *
m		12	24	45
n		18	27	45

* If the thickness of the mounting bracket (t) exceeds 5 mm, be sure to install the Sensor so that $l \geq 2$, d (dia.) ≥ 45 , and $D \geq 2$.

Mutual Interference

When installing Sensors face-to-face or side-by-side, be sure that the minimum distances given in table 2 are maintained.




Chart 2. Mutual Interference (Unit: mm)

Item	Model	E2V-X2	E2V-X5	E2V-X10
A		30	50	100
B		20	30	50

Item	Model	E2V-X4	E2V-X8	E2V-X15
A		35	60	120
B		25	35	70

Sensing Distance

- The sensing distance depends on the sensing object size, material, and thickness.
- If the sensing object has a thickness of less than 1 mm, the sensing distance will decrease.
- In some cases, it may not be possible to detect stainless steel. Use the following graph and the *Influence of Sensing Object Size and Material* information in *Engineering Data (Reference Value)* as a reference.


Aluminum and Iron Cuttings

Normally aluminum or iron cuttings will not be detected even if they adhere to or accumulate on the sensing surface. Detection signals may be output for the following. If this occurs, remove the cuttings from the sensing surface.

Diameter of cutting = d and diameter of sensing surface = D
Cuttings in center of sensing surface with $d \geq 2/3D$

(Unit: mm)


Mode	Size	D
E2V-X2/X4		10
E2V-X5/X8		16
E2V-X10/X15		28



Tightening Torque

Do not tighten the nut with excessive force.

A washer must be used with the nut.



Tightening Torque Model	Part A		Part B
	Dimension (mm)	Torque	Torque
E2V-X2/X4	17	5.9 N·m	9.8 N·m
E2V-X5/X8	22	15 N·m	45 N·m
E2V-X10/X15	26	39 N·m	78 N·m


Dimensions

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.


Sensors

Pre-wired Models


E2V-X2/X4

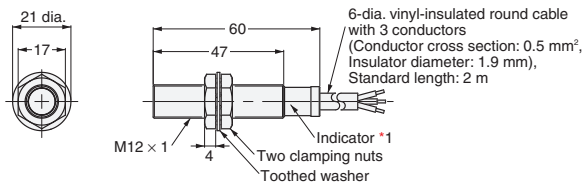

E2V-X5/X8

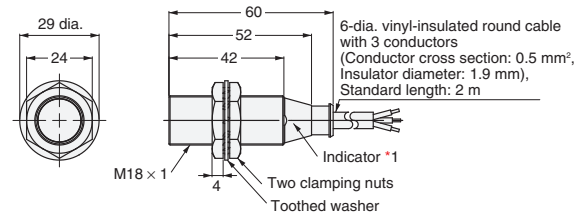


E2V-X10/X15

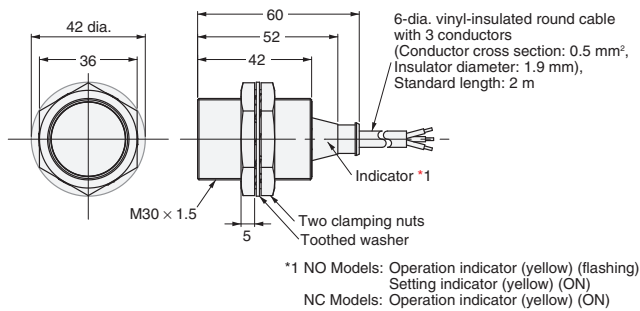


Pre-wired Connector Models


E2V-X4-M1TJ

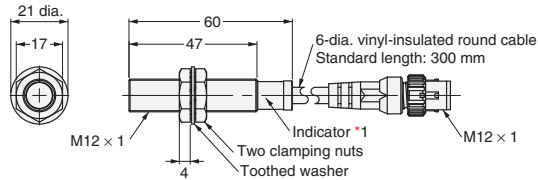


E2V-X8-M1TJ

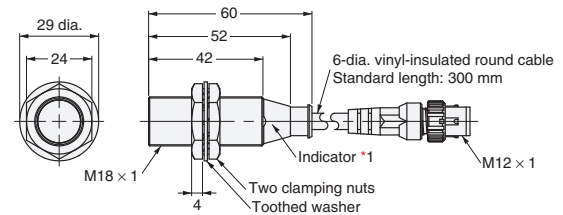

E2V-X15-M1TJ

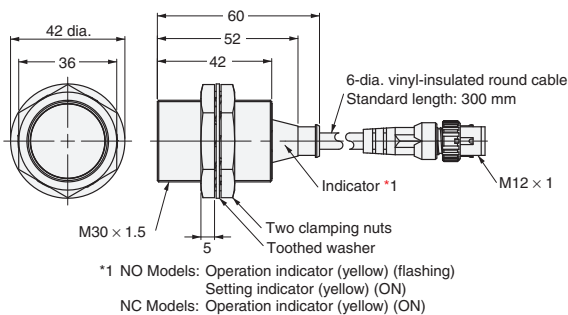


Connector Models

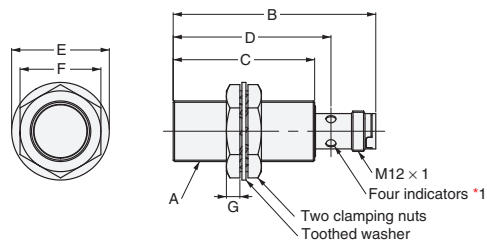

*1 NO Models: Operation indicator (yellow) (flashing)
Setting indicator (yellow) (ON)
NC Models: Operation indicator (yellow) (ON)

Model Item	E2V-X4□-M1	E2V-X8□-M1	E2V-X15□-M1
A	M12 × 1	M18 × 1	M30 × 1.5
B	65	60	63
C	47	42	42
D	52	47	49
E	21 dia.	29 dia.	42 dia.
F	17	24	36
G	4	4	5

Mounting Hole Dimensions



Proximity Sensor dimensions	M12	M18	M30
Dimension H (mm)	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.