






The Pride of Top Quality
FOOT MASTER®

Leveling casters



Guide for selection of wheels : Leveling casters

Image	Series	Description	Wheel code	Wheel dia mm	Wheel width mm	Axle bore mm	Hub length mm	Load capacity Kg	Bearing type
	NYN	– Nylon 66(Shore D70) – No bearing	NYN-42-20	42	20	7	22	60	X
			NYN-50-25	50	25	10	27	280	X
			NYN-63-28	63	28	12	34	550	X
			NYN-72-25	72	25	12	28	350	X
			NYN-75-30	75	30	12	35	1,000	X
	NYD	– Nylon 66(Shore D70) – Two ball bearings	NYD-75-55	75	55	12	55	700	6301 ZZ
	MCN	– MC nylon(Shore D80) – No bearing	MCN-40-19	40	19	7	21	60	X
			MCN-49-25	49	25	10	27	280	X
			MCN-62-28	62	28	12	33	550	X
			MCN-74-30	74	30	12	34	1,000	X
			MCN-90-55	90	55	18	56	1,500	X
	HUP	– Cast polyurethane (Shore D70) – Aluminum core – Plain bearing	HUP-50-25	50	25	10	27	280	Plain
			HUP-63-28	63	28	12	34	550	Plain
			HUP-75-30	75	30	12	35	800	Plain

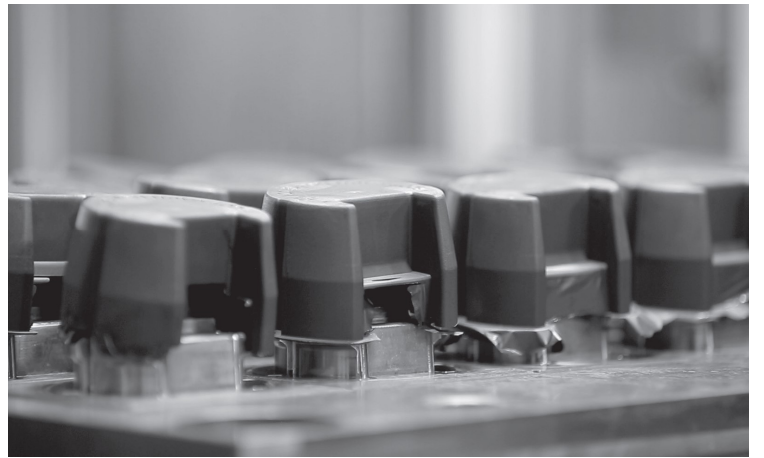

Leveling casters

GD Leveling casters

Smart Solution for both easy movement & leveling set

FOOT MASTER® leveling casters lead the global market with a global standard technology.



Moving a piece of equipment into a desired location, applying a wheel braking mechanism, and setting the unit into the exact position is easier said than done in many caster applications; FOOT MASTER® leveling casters offer a smart solution. Once positioned in the exact spot of operation, the anti-vibration pad is lowered, and the caster wheel is lifted off the ground, making the equipment completely stationary.

Major features

New concept of functional product combining a caster with a leveling ability: As a 2 in 1 system, it removes unnecessary work and improves work efficiency of workers.

