


Category 6 UTP Cable

219584-X, 219585-X

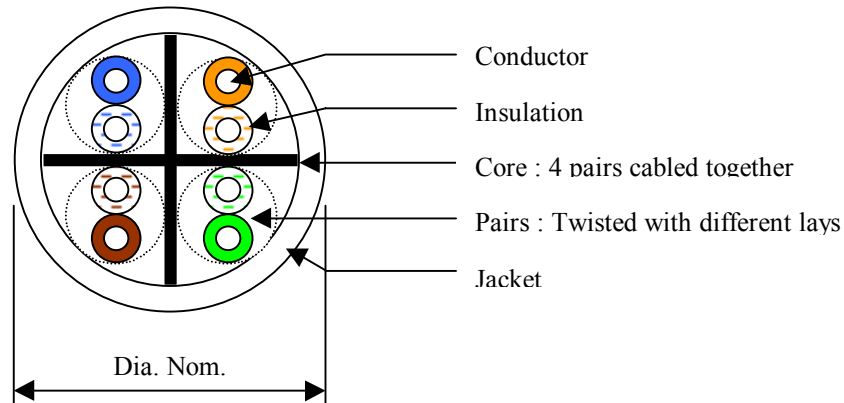

Description

AMP Category 6 cables exceed ISO/IEC 11801 2nd Edition and proposed TIA requirements for Category 6 performance. They comply with all of the performance requirements for current and proposed applications such as Gigabit Ethernet, 100BASE-Tx, token ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (broadband, baseband) and digital video and analog and digital (VoIP) voice. The cables are available in PVC and Low Smoke Zero Halogen (LSZH) and packaged Reel in a Box and on wooden reels.

Specification (Text in brackets [] requires a choice.)

Horizontal cabling shall be 23 AWG, 4-pair UTP, with a [white, grey], [PVC, LSZH]. Cable jacketing shall be lead-free. Cable shall meet the performance requirements listed in the following table [including Performance Characteristics table from back page]. Cable shall be supplied [Reel in a Box, Wooden Reels]. Horizontal cable shall be AMP part number [219584-X, 219585-X].

Description	Nominal Diameter		Vp (nom%)	Weight	Package	Part Numbers	
	Dielectric	Outside				White	Grey
4-Pair PVC	1.074 mm	6.30 mm	66	42.0 kg/km	305m RB	219584-2	219584-4
					305m WR	219584-1	219584-5
					1000m WR	219584-3	219584-6
					500m WR	4-219584-1	4-219584-4
4-Pair LSZH	1.074 mm	6.30 mm	66	43.3 kg/km	305m RB	219585-2	219585-4
					305m WR	219585-1	219585-5
					1000 WR	219585-3	219585-6
					500m WR	4-219585-1	4-219585-4

Category 6 UTP Cable

219584-X, 219585-X

Performance Characteristics (exceed ISO/IEC 11801 2nd Ed. & TIA proposed Category 6 Draft 7)

Frequency (MHz)	Attenuation (dB/100m)	NEXT (dB)		PSNEXT (dB)		ELFEXT (dB)		PSELFEXT (dB)		RL (dB)	
		Maximum	Minimum	Typical	Minimum	Typical	Minimum	Typical	Minimum	Typical	Minimum
1	2.0	77	99	75	92	67.8	95	64.8	88	23.0	28
4	3.8	68	91	66	82	66.0	84	64.0	76	23.0	32
8	5.3	64	82	62	76	49.7	76	47.7	68	24.5	35
10	6.0	62	85	60	79	47.8	72	45.8	65	25.0	35
16	7.6	59	81	57	74	43.7	67	41.7	60	25.0	35
20	8.5	58	83	56	75	41.8	65	39.8	59	25.0	35
25	9.5	56	78	54	71	39.8	65	37.8	59	24.3	36
31.25	10.7	55	74	53	68	37.9	65	35.9	54	23.6	35
62.5	15.4	50	73	48	63	31.9	59	29.9	51	23.0	42
100	19.8	47	71	45	66	27.8	57	25.8	45	23.0	39
200	29.0	43	64	41	58	21.8	51	19.8	44	20.0	38
250	32.8	41	67	39	56	19.8	59	17.8	40	19.0	38

Impedance: 100 ohms \pm 15%, 1 MHz to 250 MHz

Propagation delay: 536 ns/100 m max. @ 250 MHz

Delay Skew: 45 ns max, 1 MHz to 250 MHz

Min. Bend radius: 4 x cable diameter

Loop resistance: 30.0 ohms/100m max

Mutual capacitance: 5.6 nF max/100 m

Fire Rating: IEC 60332-1

Calorific Value:

219584 - 430.00 MJ/km

219585 - 600.00 MJ/km

Materials:

Conductors – 0.554mm (23 AWG) solid bare copper

Insulation –

219584 – Polyethylene.

219585 – Polyethylene.

Jacket -

219584 - FR PVC

219585 – LSZH

Operating temperature: -20°C to +60°C

Storage temperature: -20°C to +80°C

Specifications subject to change without notice.

Revised 1/01.

EMEA. +44 (0)1382 513013

In the U.S. 1-800-553-0938

Canada 905-475-6222

Mexico 525-729-0400

South and Central Americas 54-11-4733-2200

www.ampnetconnect.com

e-mail: networking.help@tycoelectronics.com

© Copyright 2001 Tyco Electronics Corporation. All rights reserved.

AMP and NETCONNECT are trademarks.

tyco
Electronics

AMP
NETCONNECT