

# Clamp Cylinder

ø40, ø50, ø63

New

RoHS

## Total tube length reduced



Total tube length reduced by

**7mm**

(CKP1□40)

Series CKP1

[Built-in strong magnet type]

Total tube length

Hexagon wrench

## Easy speed adjustment

Speed controller valve

Easy fine speed adjustment with screw adjustment construction  
No projection from the tube external surface


Retaining construction with crimping



## Clevis width

16.5 mm/19.5 mm

Possible to select depending on the application

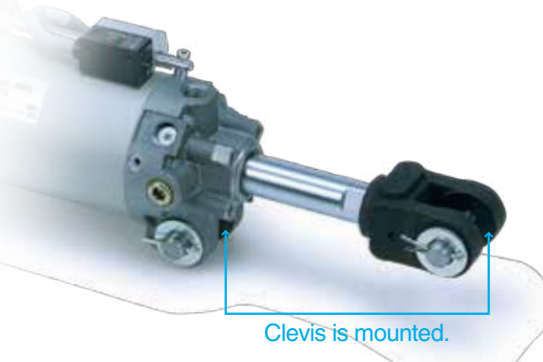

Clevis is mounted.

Made to Order


With air cushion on both ends (-X1515) is added.

## Magnetic field resistant auto switches

Mountable from 3 directions

[Series CKG1/Built-in standard magnet type]

D-P3DW, D-P4DW



[Series CKP1/Built-in strong magnet type]

D-P79WSE, D-P74L/Z



Series CK□1

SVC

CAT.NAS20-225B

### Total tube length reduced

The total length has been reduced by modifying the internal design.

Series CKP1 (mm)


Bore size (mm)	New CKP1	Shortened dimensions	Existing model
40	58	7	65
50	56	2	58
63	56	2	58

Series CKG1 (mm)

Bore size (mm)	New CKG1	Shortened dimensions	Existing model
40	53	2	55
50	56	2	58
63	56	2	58

### Mounting dimensions are the same as the existing product.

The dimension from the body to the work piece is the same as the existing product.

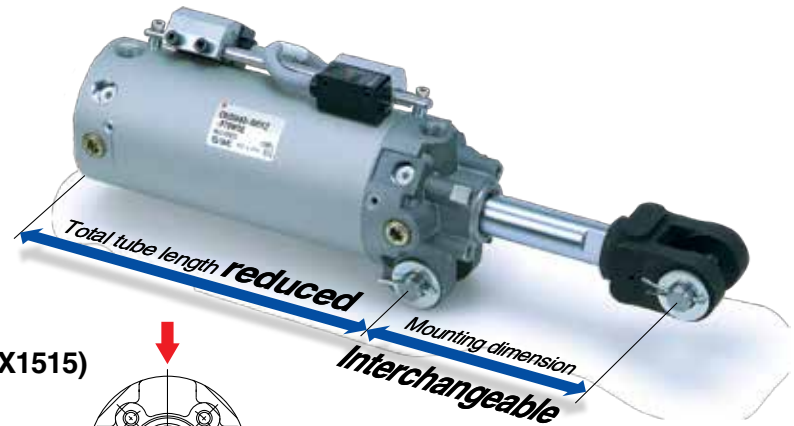


### With air cushion

Unclamped side (Head end) ... Standard  
Air cushion on both ends ..... Made to Order (-X1515)

### Piping ports are located on three surfaces.


Piping arrangement is more flexible corresponding to the installed environment.







### Possible to mount magnetic field resistant auto switch using the mounting rod

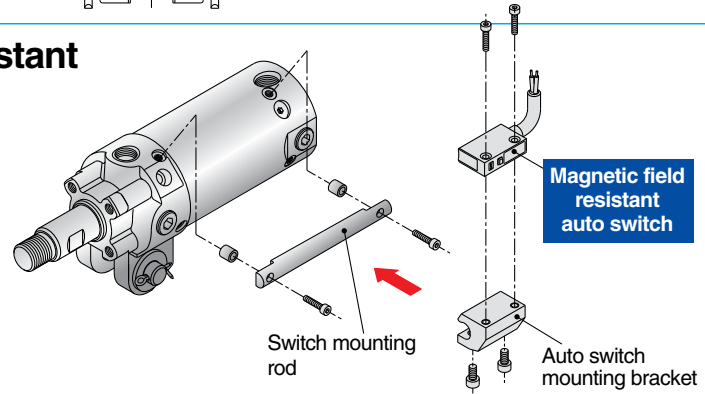[Series CKG1/Built-in standard magnet type]  
D-P3DWSC, D-P3DWSE, D-P3DW/LZ (AC magnetic field)  
D-P4DWSC, D-P4DWSE, D-P4DWL/LZ (AC magnetic field)

[Series CKP1/Built-in strong magnet type]  
D-P79WSE, D-P74L/LZ (DC/AC magnetic field)



### CK1 Series Variations

Series	Series	Model	Bore size (mm)					Stroke (mm)	Clevis width (mm)	Page
			25	32	40	50	63			
 Clamp cylinder	Basic	CK1			●	●	●	50 75 100 125 150 200*	16.5, 19.5	P.1
	Built-in standard magnet type	CKG1□			●	●	●	*Except ø40		
	Built-in strong magnet type	CKP1□			●	●	●			
 Clamp cylinder/ Slim style	Built-in standard magnet type	CKG□-X2095	●	●	●		50	9, 12.5	Information 09-E555	
	Built-in strong magnet type	CKP□-X2095	●	●	●		75			
 Clamp cylinder with lock/Slim style	Built-in standard magnet type	CLKG□-X2095		●	●		100 125 150	12, 16.5, 19.5	Best Pneumatics P.1481	
	Built-in strong magnet type	CLKP□-X2095		●	●		50, 75			
 Clamp cylinder with lock	Built-in standard magnet type	CLK2G□		●	●	●	100, 125 150	16.5, 19.5		
	Built-in strong magnet type	CLK2P□		●	●	●				

# Clamp Cylinder with Magnetic Field Resistant Auto Switch (Rod Mounting Style)


## Series **CKG1/CKP1** ø40, ø50, ø63



### How to Order

Built-in standard magnet type with magnetic field resistant auto switch

Built-in strong magnet type with magnetic field resistant auto switch

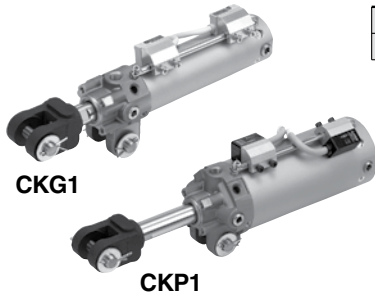

**CKG1** A 50 [ ] - 100 Y [ ] Z - P3DWSC [ ] - [ ]

**CKP1** A 50 [ ] - 100 Y [ ] Z - P79WSE [ ]

Clevis width

A	16.5 mm
B	19.5 mm

Bore size

40	40 mm
50	50 mm
63	63 mm

Thread type

Nil	Rc1/4
TN	NPT1/4
TF	G1/4

Cylinder stroke (mm)

40	50, 75, 100, 125, 150
50	50, 75, 100, 125, 150, 200
63	50, 75, 100, 125, 150, 200

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order  
Refer to page 2 for details.

Auto switch

Nil	Without auto switch (built-in magnet) Without switch mounting rod
P	Without auto switch (built-in magnet) With switch mounting rod

\* Select applicable auto switch models from the table below.

Option

Nil	None
B	Limit switch mounting base
D	Dog fitting <sup>Note 1)</sup>
L	Foot
K <sup>Note 2)</sup>	Pedestal (for 75, 100, 150 strokes only)

Note 1) When the dog fitting is selected, choose the rod end bracket IA or YA (M6 with tap).

Note 2) Clevis width B (19.5 mm) is not available with pedestal K.

End bracket

Nil	None
I	Single knuckle joint (M6 without tap)
IA	Single knuckle joint (M6 with tap)
Y	Double knuckle joint (M6 without tap)
YA	Double knuckle joint (M6 with tap)

Note 1) IA and YA are equivalent to the conventional models.

Note 2) A knuckle pin, cotter pins and flat washers are provided as a standard for Y and YA.

### Built-in Standard (Strong) Magnet Cylinder Part No.

1) Built-in standard (strong) magnet type without auto switch, without switch mounting rod

Symbol for the auto switch type is "Nil" as shown below.

CKG1: (Example) CKG1A50-50YZ  
CKP1: (Example) CKP1A50-50YZ

2) Built-in standard (strong) magnet type without auto switch, with switch mounting rod

Symbol for the auto switch type is "P" as shown below.

CKG1: (Example) CKG1A50-50YZ-P  
CKP1: (Example) CKP1A50-50YZ-P

\* The auto switch mounting bracket is not included.

### Applicable Magnetic Field Resistant Auto Switches (Refer to the Best Pneumatics No.3 for detailed auto switch specifications.)

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load
CKG1	Solid state auto switch	D-P3DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color indication	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <sup>Note 1)</sup>
		D-P4DWSC							
		D-P3DWSE							
		D-P4DWSE							
		D-P3DW		Grommet	2-wire	24 VDC		0.5 m	
		D-P3DWL							
		D-P4DWL							
		D-P3DWZ							
D-P4DWZ									
CKP1	Reed auto switch	D-P79WSE	DC/AC magnetic field	Pre-wired connector	2-color indication	2-wire (1-4)	24 VDC	0.3 m	Relay, PLC <sup>Note 1)</sup>
		D-P74L		Grommet	1-color indication	2-wire	24 VDC	3 m	
		D-P74Z					100 VAC	5 m	

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 10.

Note 3) Refer to page 11 when ordering the auto switch mounting bracket assembly or switch mounting rod assembly.

Note 4) For the D-P3DW□, the auto switch and auto switch mounting bracket are packed together, (but not assembled).

# Series CK□1



## Specifications

Bore size (mm)	40	50	63
Fluid	Air		
Proof pressure	218 psi (1.5 MPa)		
Maximum operating pressure	145 psi (1.0 MPa)		
Minimum operating pressure	7.25 psi (0.05 MPa)		
Ambient and fluid temperature	14 to 140°F (-10 to 60°C)		
Piston speed	50 to 500 mm/s		
Cushion	Unclamped side (head end): With air cushion		
Speed controller	Equipped on both ends		
Lubrication	Non-lube		
Stroke length tolerance	+1.0 0		
Mounting <sup>(Note)</sup>	Double clevis		

Note) A clevis pin, cotter pins, flat washers are equipped as a standard.

Clevis width	16.5 mm	CKG1A/CKP1A series
	19.5 mm	CKG1B/CKP1B series

## Standard Stroke

Bore size (mm)	Standard stroke (mm)
40	50, 75, 100, 125, 150
50, 63	50, 75, 100, 125, 150, 200

## End Bracket/Options

Symbol	Description		Part no.	
			CKG1A/CKP1A series	CKG1B/CKP1B series
I	Single knuckle joint	M6 without tap	CKB-I04	
IA		M6 with tap	CKB-IA04	
Y	Double knuckle joint (A knuckle pin, cotter pins, flat washers are equipped as a standard.)	M6 without tap	CKA-Y04	CKB-Y04
YA		M6 with tap	CKA-YA04	CKB-YA04

## Weight <sup>(Basic weight includes the switch mounting rod. At 0 stroke)</sup>

				Unit: kg			
		Bore size (mm)	40	50	63		
CKG1□ cylinder	Basic weight		0.70	0.92	1.12		
	Additional weight per 25 mm of stroke		0.11	0.12	0.14		
CKP1□ cylinder	Basic weight		0.72	0.98	1.28		
	Additional weight per 25 mm of stroke		0.11	0.12	0.14		
Single knuckle joint			0.20				
Double knuckle joint (A knuckle pin, cotter pins, flat washers are equipped as a standard.)			0.34				

Calculation

Example) CKG1□50-100YZ-P

- Basic weight ..... 0.92 (ø50)
- Additional weight ..... 0.12/25 mm
- Cylinder stroke ..... 100 mm
- Double knuckle joint ..... 0.34 (Y)

$$0.92 + 0.12 \times 100/25 + 0.34 = 1.74 \text{ kg}$$

## Theoretical Output

					Unit: lbf (N)			
Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure psi (MPa)				
				44 (0.3)	58 (0.4)	73 (0.5)	87 (0.6)	
40	20	OUT	1260	85.0 (378)	113 (504)	142 (630)	170 (756)	
		IN	943	63.6 (283)	84.8 (377)	106 (472)	127 (566)	
50	20	OUT	1960	132 (588)	176 (784)	220 (980)	265 (1180)	
		IN	1650	111 (495)	148 (660)	185 (825)	223 (990)	
63	20	OUT	3120	210 (934)	281 (1250)	351 (1560)	420 (1870)	
		IN	2800	189 (840)	252 (1120)	315 (1400)	378 (1680)	

Refer to pages 10 to 12 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Operating range
- Auto switch mounting bracket/Part no.




**Made to Order**  
(Refer to page 14 for details.)

Symbol	Specifications
-X1515	With air cushion on both ends



## Construction

### CKG1□40, 50, 63 Built-in standard magnet type/With magnetic field resistant auto switch

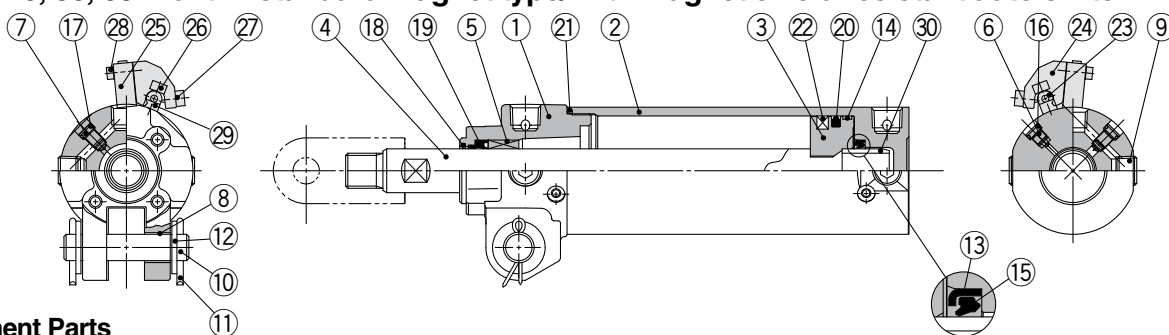


#### Component Parts

No.	Description	Material	Q'ty	Note
1	Rod cover	Aluminum alloy	1	Chromated
2	Tube cover	Aluminum alloy	1	Hard anodized
3	Piston	Aluminum alloy	1	Chromated
4	Piston rod	Carbon steel	1	Hard chrome plating
5	Bushing	Bearing alloy	1	
6	Cushion valve	Steel wire	1	Black zinc chromated
7	Speed controller valve	Steel wire	2	Nickel plating
8	Clevis bushing	Oil-impregnated sintered alloy	2	
9	Hexagon socket head plug	Carbon steel	4	Rc1/4
10	Pin	Carbon steel	1	
11	Cotter pin	Low carbon steel wire rod	2	
12	Flat washer	Rolled steel	2	
13	Cushion seal retainer	Rolled steel	1	Zinc chromated
14	Wear ring	Resin	1	
15	Cushion seal	Urethane	1	
16	Cushion valve seal	NBR	1	

No.	Description	Material	Q'ty	Note
17	Speed controller valve seal	NBR	2	
18	Coil scraper	Phosphor bronze	1	
19	Rod seal	NBR	1	
20	Piston seal	NBR	1	
21	Tube gasket	NBR	1	
22	Magnet	—	1	
23	Switch mounting rod	Carbon steel	1	Zinc chromated
24	Auto switch mounting bracket	Aluminum alloy	—	
25	Magnetic field resistant auto switch	—	—	
26	Hexagon socket head cap screw	Steel wire	2	M4 x 0.7 x 14 L
27	Hexagon socket head cap screw	Steel wire	2 pcs. per switch	M4 x 0.7 x 8 L
28	Hexagon socket head cap screw	Steel wire	2 pcs. per switch	M3 x 0.5 x 14 L
29	Switch mounting spacer	Aluminum alloy	2	
30	Cushion ring	Aluminum alloy	1	Anodized

### CKP1□40, 50, 63 Built-in strong magnet type/With magnetic field resistant auto switch

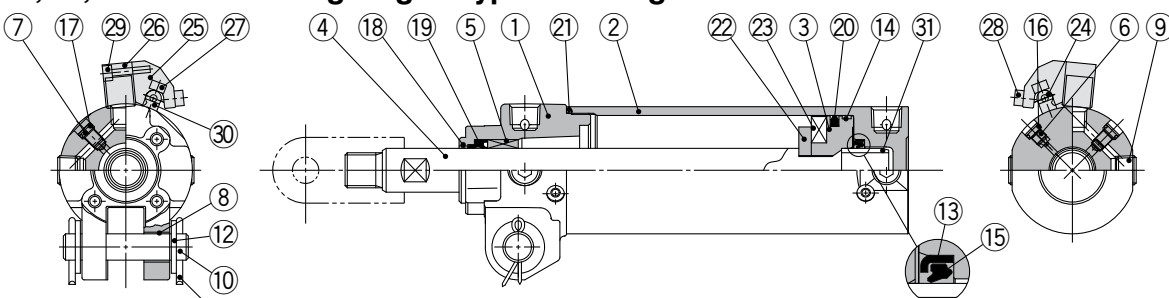

#### Replacement Parts/Seal Kit

Bore size (mm)	Order no.	Contents
40	CK1A40-PS	Set of nos. above (19, 20, 21).
50	CK1A50-PS	
63	CK1A63-PS	

Note 1) Seal kits are the same as those of the CKG1□/CKP1□.  
 Note 2) Seal kit does not come with a grease pack, so please order it separately.  
**Grease pack part number: GR-S-010**  
 (compatible with all sizes)

#### Component Parts


No.	Description	Material	Q'ty	Note
1	Rod cover	Aluminum alloy	1	Chromated
2	Tube cover	Aluminum alloy	1	Hard anodized
3	Piston	Aluminum alloy	1	Chromated
4	Piston rod	Carbon steel	1	Hard chrome plating
5	Bushing	Bearing alloy	1	
6	Cushion valve	Steel wire	1	Black zinc chromated
7	Speed controller valve	Steel wire	2	Nickel plating
8	Clevis bushing	Oil-impregnated sintered alloy	2	
9	Hexagon socket head plug	Carbon steel	4	Rc1/4
10	Pin	Carbon steel	1	
11	Cotter pin	Low carbon steel wire rod	2	
12	Flat washer	Rolled steel	2	
13	Cushion seal retainer	Rolled steel	1	Zinc chromated
14	Wear ring	Resin	1	
15	Cushion seal	Urethane	1	
16	Cushion valve seal	NBR	1	
17	Speed controller valve seal	NBR	2	

No.	Description	Material	Q'ty	Note
18	Coil scraper	Phosphor bronze	1	
19	Rod seal	NBR	1	
20	Piston seal	NBR	1	
21	Tube gasket	NBR	1	
22	Magnet holder	Aluminum alloy	1	
23	Magnet	—	1	
24	Switch mounting rod	Carbon steel	1	Zinc chromated
25	Auto switch mounting bracket	Aluminum alloy	—	
26	Magnetic field resistant auto switch	—	—	
27	Hexagon socket head cap screw	Steel wire	2	M4 x 0.7 x 14 L
28	Hexagon socket head cap screw	Steel wire	2 pcs. per switch	M4 x 0.7 x 8 L
29	Hexagon socket head cap screw	Steel wire	2 pcs. per switch	M3 x 0.5 x 16 L
30	Switch mounting spacer	Aluminum alloy	2	
31	Cushion ring	Aluminum alloy	1	Anodized


# Series CK□1

## Dimensions

### CKG1□40, 50, 63 Built-in standard magnet type/With magnetic field resistant auto switch (D-P4DWS□)

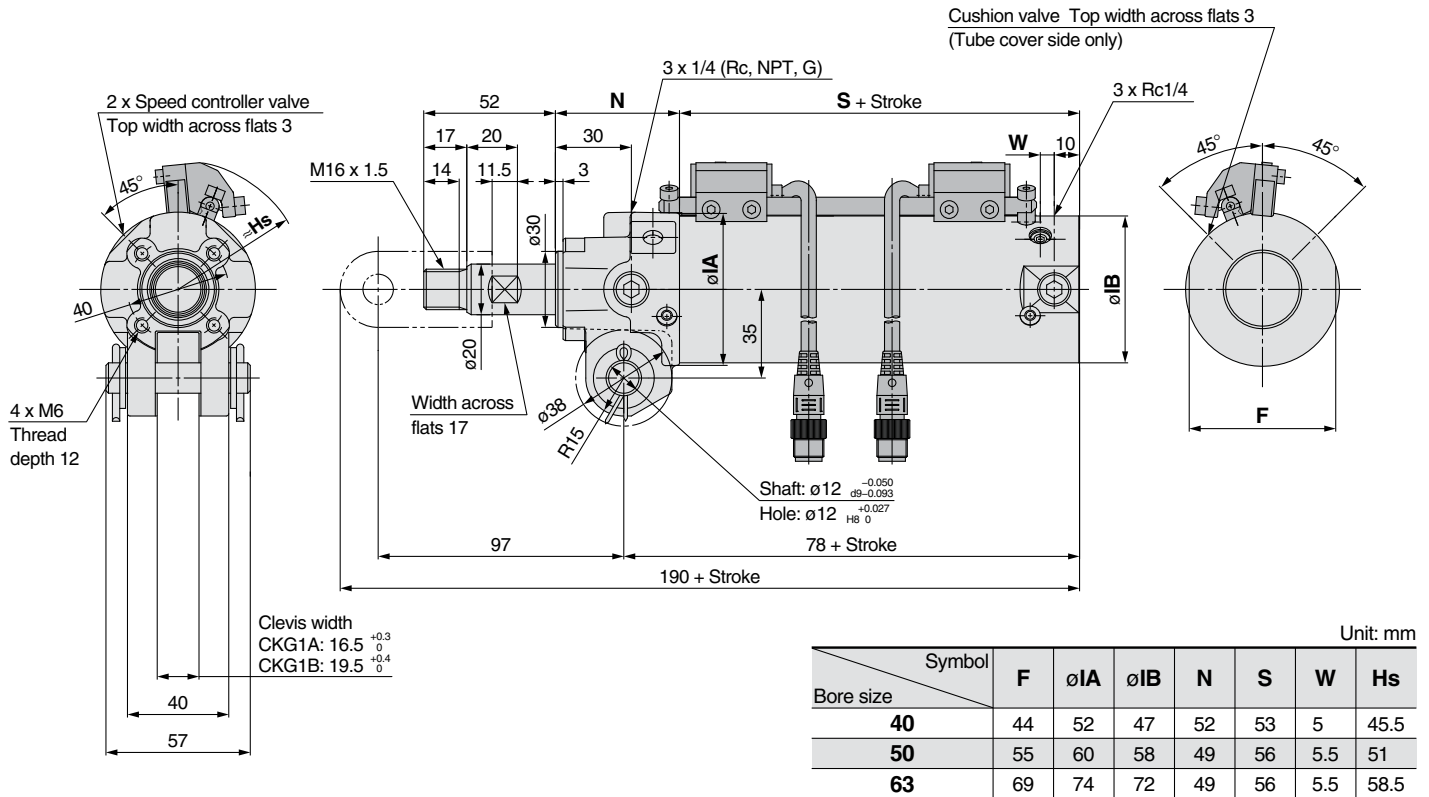

### CKP1□40, 50, 63 Built-in strong magnet type/With magnetic field resistant auto switch (D-P79WSE)

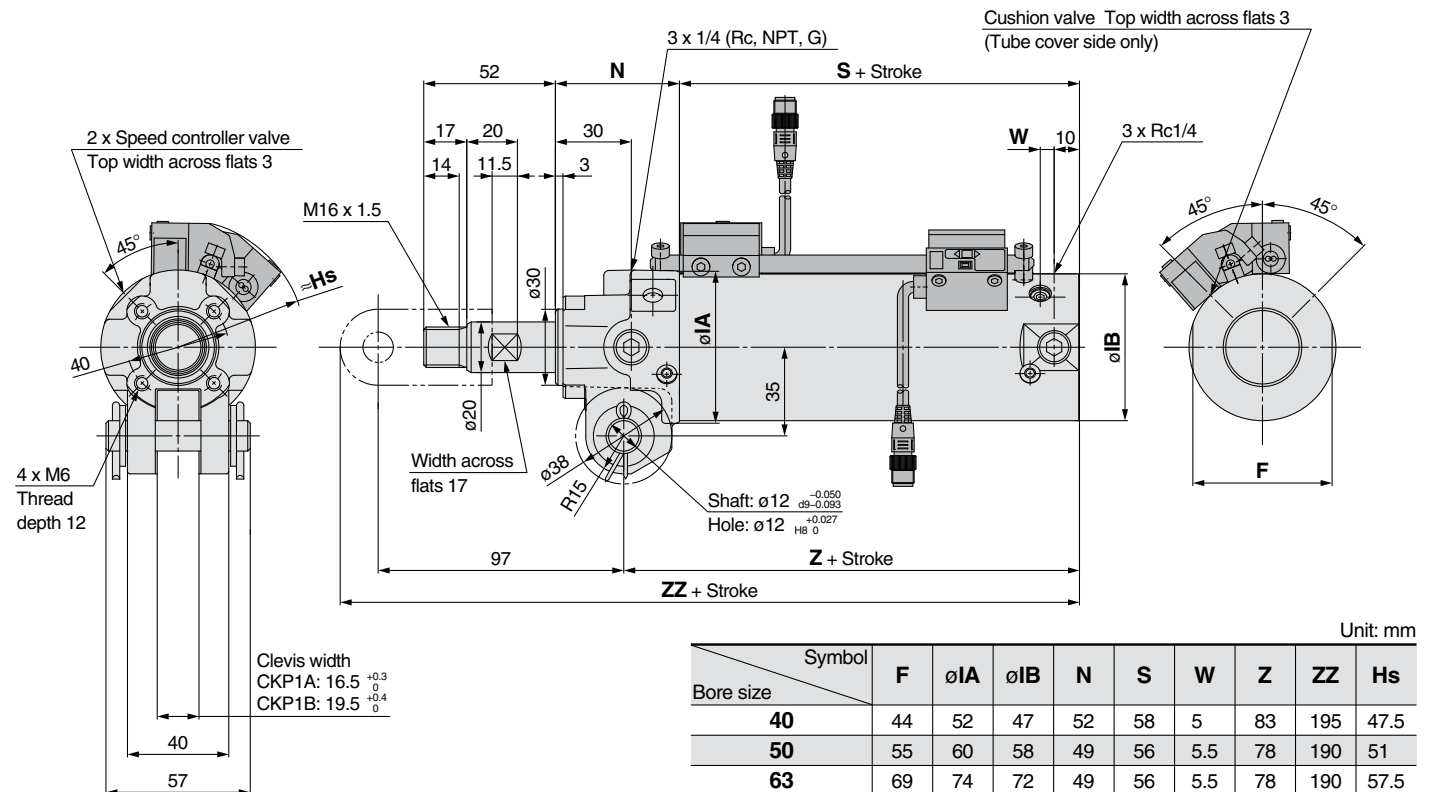

# Clamp Cylinder with Magnetic Field Resistant Auto Switch (Band Mounting Style)

## Series CK1/CKG1

ø40, ø50, ø63



### How to Order

**Without magnet**


**Built-in standard magnet type**

CK1 A 50 [ ] - 100 Y [ ] Z - [ ]

CKG1 A 50 [ ] - 100 Y [ ] Z

For how to order auto switch/switch mounting bracket, refer to the below.

• **Made to Order**  
Refer to page 6 for details.

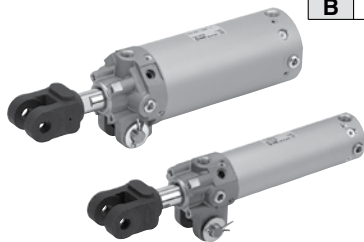

**Clevis width**

A	16.5 mm
B	19.5 mm

**Bore size**

40	40 mm
50	50 mm
63	63 mm

**Thread type**

Nil	Rc1/4
TN	NPT1/4
TF	G1/4

**Cylinder stroke (mm)**

40	50, 75, 100, 125, 150
50	50, 75, 100, 125, 150, 200
63	50, 75, 100, 125, 150, 200

• **Option**

Nil	None
B	Limit switch mounting base
D	Dog fitting <sup>Note 1)</sup>
L	Foot
K <sup>Note 2)</sup>	Pedestal (for 75, 100, 150 strokes only)

Note 1) When the dog fitting is selected, choose the rod end bracket IA or YA (M6 with tap).

Note 2) Clevis width B (19.5 mm) is not available with pedestal K.

• **End bracket**

Nil	None
I	Single knuckle joint (M6 without tap)
IA	Single knuckle joint (M6 with tap)
Y	Double knuckle joint (M6 without tap)
YA	Double knuckle joint (M6 with tap)

Note 1) IA and YA are equivalent to the conventional models.

Note 2) A knuckle pin, cotter pins and flat washers are provided as a standard for Y and YA.


### Magnetic Field Resistant Auto Switch D-P4DW□□/Band Mounting Compliant

Band mounting of the magnetic field resistant auto switch (D-P4DW□□) to the built-in standard magnet clamp cylinder (CKG1□ series) is possible by ordering the switch mounting bracket and the auto switch individually.

### ⚠ Caution

Standard type auto switch is mountable for the built-in standard magnet type.

For details, refer to "Standard Auto Switch Mounting" on page 12. Also, please note that the standard type auto switch cannot be used under the magnetic field resistant environment.



### How to Order

Please order the switch mounting bracket, auto switch and built-in standard magnet clamp cylinder individually. Refer to the table below for auto switch mounting bracket part numbers.

Part no.	Applicable auto switch model	Applicable clamp cylinder
BA8-040	D-P4DWSC	CKG1□40
BA8-050	D-P4DWSE	CKG1□50
BA8-063	D-P4DWL/Z	CKG1□63

### Ordering Example

Example case ① Built-in standard magnet cylinder:

CKG1A50-50YZ ..... 1

Example case ② Magnetic field resistant auto switch:

D-P4DWSC ..... 2

Example case ③ Switch mounting bracket: BA8-050 ..... 2

Note 1) Please order the same quantity for the switch mounting bracket and the magnetic field resistant auto switch respectively.

Note 2) Band mounting for the magnetic field resistant auto switches D-P79WS□, D-P74□ is not applicable.

### Applicable Magnetic Field Resistant Auto Switches

Applicable cylinder series	Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no in use)	Load voltage	Lead wire length	Applicable load	
CKG1	Solid state auto switch	P4DWSC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color indication	2-wire (3-4)	24 VDC	0.3 m	Relay, PLC <sup>Note 1)</sup>	
		P4DWSE				2-wire (1-4)				
		P4DWL		Grommet		2-wire				3 m
		P4DWZ								

Note 1) PLC: Programmable Logic Controller

Note 2) There are other applicable auto switches other than the listed above. For details, refer to page 10.





Refer to pages 10 to 12 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Auto switch proper mounting position (detection at stroke end) and its mounting height
- Operating range
- Auto switch mounting bracket/Part no.



**Made to Order**  
(Refer to page 14 for details.)

Symbol	Specifications
-X1515	With air cushion on both ends

## Specifications

Bore size (mm)	40	50	63
Fluid	Air		
Proof pressure	218 psi (1.5 MPa)		
Maximum operating pressure	145 psi (1.0 MPa)		
Minimum operating pressure	7.25 psi (0.05 MPa)		
Ambient and fluid temperature	Without auto switch: 14 to 158°F (-10 to 70°C) With auto switch: 14 to 140°F (-10 to 60°C)		
Piston speed	50 to 500 mm/s		
Cushion	Unclamped side (head end): With air cushion		
Speed controller	Equipped on both ends		
Lubrication	Non-lube		
Stroke length tolerance	+1.0 0		
Mounting <sup>Note)</sup>	Double clevis		

Note) A clevis pin, cotter pins, flat washers are equipped as a standard.

Clevis width	16.5 mm	CK1A/CKG1A series
	19.5 mm	CK1B/CKG1B series

## Standard Stroke

Bore size (mm)	Standard stroke (mm)
40	50, 75, 100, 125, 150
50, 63	50, 75, 100, 125, 150, 200

## End Bracket/Options

Symbol	Description	Part no.	
		CK1A/CKG1A series	CK1B/CKG1B series
I	Single knuckle joint	M6 without tap	CKB-I04
IA		M6 with tap	CKB-IA04
Y	Double knuckle joint (A knuckle pin, cotter pins, flat washers are equipped as a standard.)	M6 without tap	CKB-Y04
YA		M6 with tap	CKB-YA04

## Weight

Bore size (mm)		40	50	63
Cylinder	Basic weight	0.68	0.90	1.10
	Additional weight per 25 mm of stroke	0.10	0.11	0.13
Single knuckle joint		0.20		
Double knuckle joint (A knuckle pin, cotter pins, flat washers are equipped as a standard.)		0.34		

Calculation

Example) CK1G□50-100YZ

- Basic weight .....0.90 (ø50)
- Additional weight.....0.11/25 mm
- Cylinder stroke.....100 mm
- Double knuckle joint.....0.34 (Y)

$$0.90 + 0.11 \times 100/25 + 0.34 = 1.68 \text{ kg}$$


## Theoretical Output

Bore size (mm)	Rod size (mm)	Operating direction	Piston area (mm <sup>2</sup> )	Operating pressure (psi (MPa))			
				44 (0.3)	58 (0.4)	73 (0.5)	87 (0.6)
40	20	OUT	1260	85.0 (378)	113 (504)	142 (630)	170 (756)
		IN	943	63.6 (283)	84.8 (377)	106 (472)	127 (566)
50	20	OUT	1960	132 (588)	176 (784)	220 (980)	265 (1180)
		IN	1650	111 (495)	148 (660)	185 (825)	223 (990)
63	20	OUT	3120	210 (934)	281 (1250)	351 (1560)	420 (1870)
		IN	2800	189 (840)	252 (1120)	315 (1400)	378 (1680)



## Construction

### CK1□40, 50, 63 Basic type/CKG1□40, 50, 63 Built-in standard magnet type

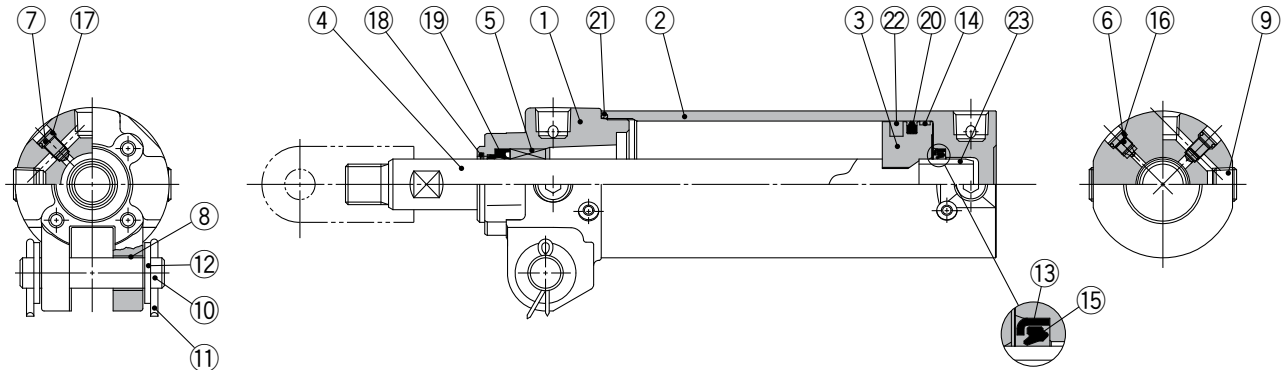

## Component Parts

No.	Description	Material	Qty	Note
1	Rod cover	Aluminum alloy	1	Chromated
2	Tube cover	Aluminum alloy	1	Hard anodized
3	Piston	Aluminum alloy	1	Chromated
4	Piston rod	Carbon steel	1	Hard chrome plating
5	Bushing	Bearing alloy	1	
6	Cushion valve	Steel wire	1	Black zinc chromated
7	Speed controller valve	Steel wire	2	Nickel plating
8	Clevis bushing	Oil-impregnated sintered alloy	2	
9	Hexagon socket head plug	Carbon steel	4	Rc1/4
10	Pin	Carbon steel	1	
11	Cotter pin	Low carbon steel wire rod	2	
12	Flat washer	Rolled steel	2	
13	Cushion seal retainer	Rolled steel	1	Zinc chromated
14	Wear ring	Resin	1	
15	Cushion seal	Urethane	1	
16	Cushion valve seal	NBR	1	
17	Speed controller valve seal	NBR	2	
18	Coil scraper	Phosphor bronze	1	
19	Rod seal	NBR	1	
20	Piston seal	NBR	1	
21	Tube gasket	NBR	1	
22	Magnet	—	—	For the CKG1
23	Cushion ring	Aluminum alloy	1	Anodized

## Replacement Parts/Seal Kit

Bore size (mm)	Order no.	Contents
40	CK1A40-PS	Set of nos. above (19, 20, 21).
50	CK1A50-PS	
63	CK1A63-PS	

Note) Seal kit does not come with a grease pack, so please order it separately.


Grease pack part number: **GR-S-010** (compatible with all sizes)

# Series CK□1

## Dimensions


### CK1□40, 50, 63/Basic type

### CKG1□40, 50, 63/Built-in standard magnet type

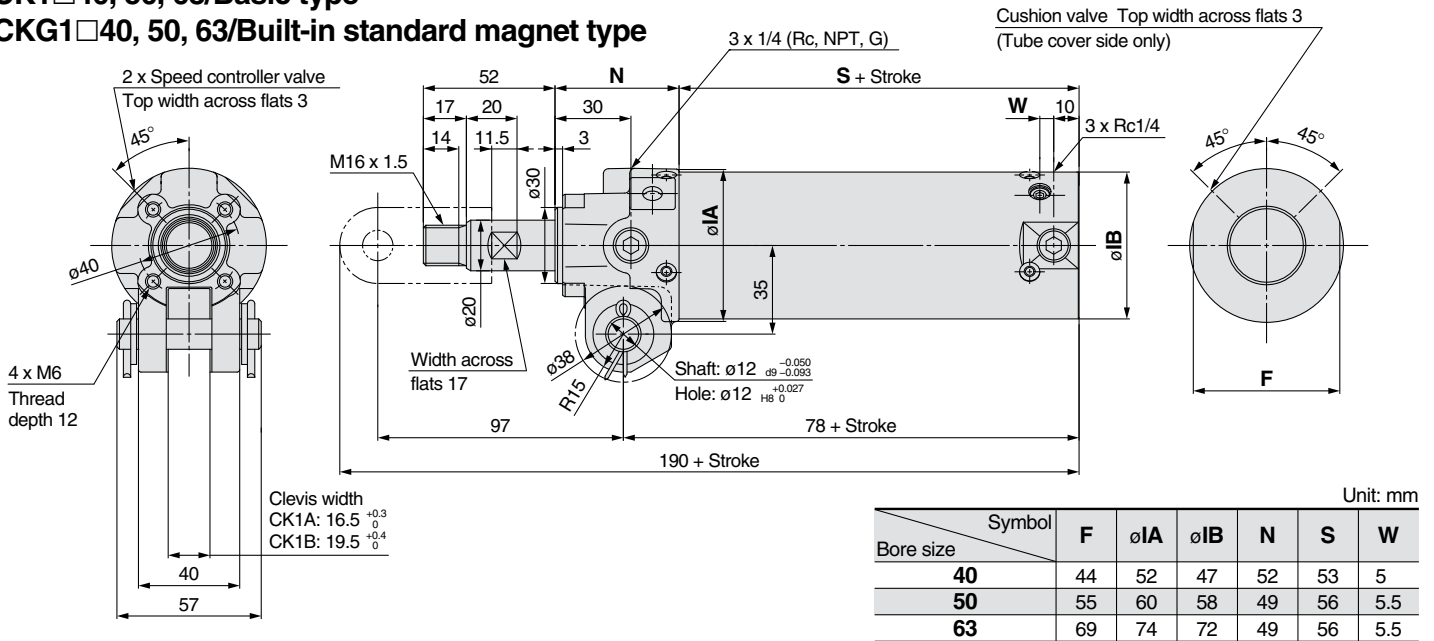

## End Bracket

### Single Knuckle Joint

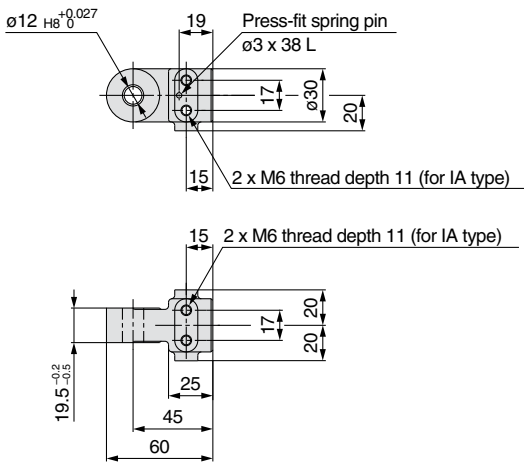


Material: Cast iron

Part no.	End bracket symbol	Applicable clamp cylinder
<b>CKB-IA04</b>	I (M6 without tap)	CK□1A series
<b>CKB-IA04</b>	IA (M6 with tap)	CK□1B series

Note 1) A spring pin is attached to the single knuckle joint as a standard.  
 Note 2) The existing model is equivalent to the component part number CKB-IA04 (end bracket symbol IA).

### Double Knuckle Joint

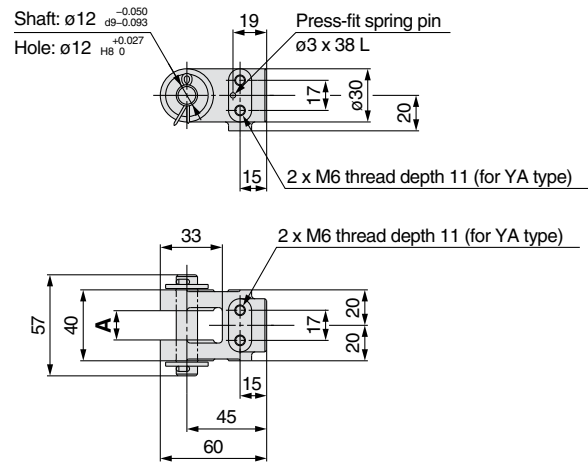


Material: Cast iron

Unit: mm

Part no.	End bracket symbol	A	Applicable clamp cylinder
<b>CKA-YA04</b>	Y (M6 without tap)	16.5 (+0.3/0)	CK□1A series
<b>CKA-YA04</b>	YA (M6 with tap)		
<b>CKB-YA04</b>	Y (M6 without tap)	19.5 (+0.4/0)	CK□1B series
<b>CKB-YA04</b>	YA (M6 with tap)		

Note 1) A knuckle pin, cotter pins, flat washers and a spring pin are attached to the double knuckle joint as a standard.  
 Note 2) The existing model is equivalent to the component part number CKA-YA04, CKB-YA04 (end bracket symbol YA).

## Pin




Material: Carbon steel

Part no.	Usage
<b>CK-P04</b>	Knuckle pin Clevis pin

Note) Cotter pins and flat washers are attached to the pin as a standard.

# Series CK□1 Options

## Limit Switch Mounting Base/Dog Fitting

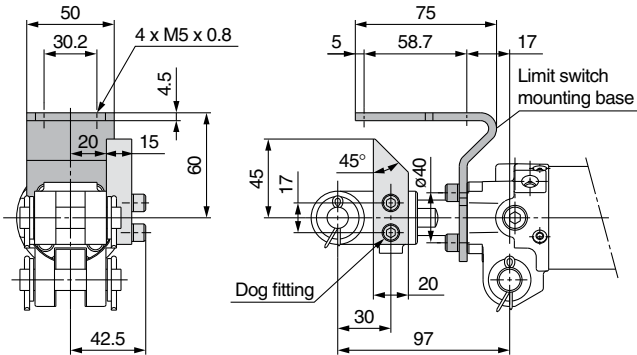

Material: Rolled steel

Part no.	Option symbol	Name	Applicable clamp cylinder
CK-B04	B	Limit switch mounting base	CK□1A series
CK-D04	D	Dog fitting	CK□1B series


Note 1) Limit switch mounting base and dog fitting can be repositioned by removing the hexagon socket head cap screw.

Note 2) When ordering the limit switch mounting base and the dog fitting individually, mounting bolts (hexagon socket head cap screw) and spring washers will be attached as a standard.



**When you attach a dog fitting, be sure to use a knuckle joint, M6 with tap (end bracket symbol IA or YA).  
The dog fitting cannot be attached to the knuckle joint, M6 without tap (end bracket symbol I or Y).**

## Foot

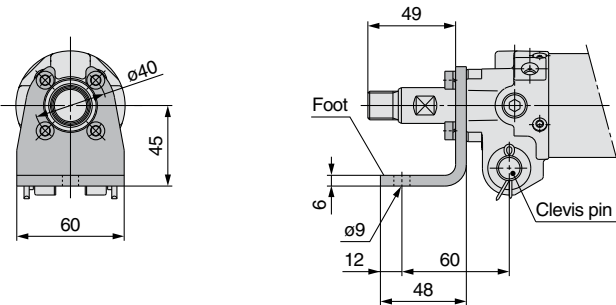


Material: Rolled steel

Part no.	Option symbol	Applicable clamp cylinder
CK-L04	L	CK□1A series CK□1B series

Note 1) A mounting bolt (hexagon socket head cap screw) and a spring washer will be attached as a standard for the foot bracket.

Note 2) When mounting the cylinder, use both the foot and clevis pin. Please avoid using the foot by itself as this may result in damage.

## Pedestal

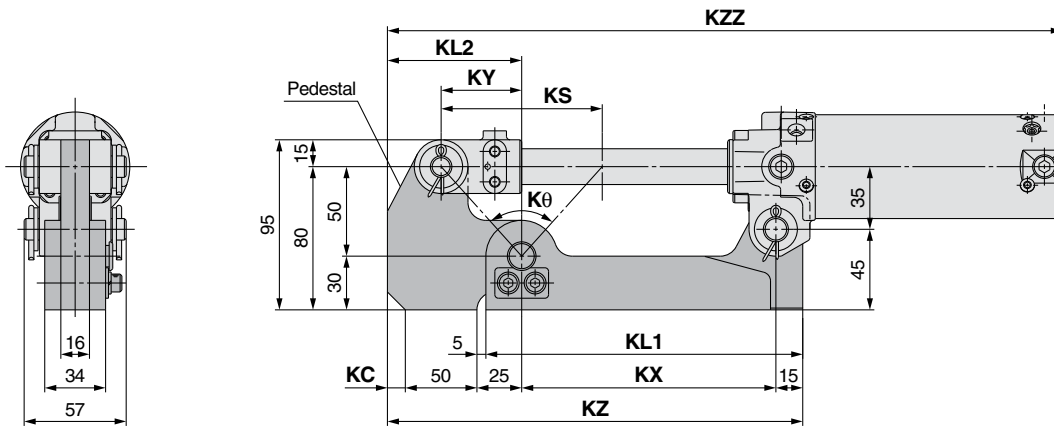

Material: Rolled steel

Unit: mm

Part no.	Option symbol	KL1	KL2	KS	KX	KY	KZ	Kθ	KC	KZZ				Applicable clamp cylinder
										CKG□40	CKP□40	CKG□50 CKP□50	CKG□63 CKP□63	
CKA-K075	K	167	75	70	132	35	222	69° 59'	0	360	365	360		CK□1A40-75YZ CK□1A50-75YZ CK□1A63-75YZ
CKA-K100		177	75	90	142	45	232	83° 58'	0	395			CK□1A40-100YZ CK□1A50-100YZ CK□1A63-100YZ	
CKA-K150		202	85	140	167	70	267	108° 55'	10	480			CK□1A40-150YZ CK□1A50-150YZ CK□1A63-150YZ	


Note) The CK□1B series (clevis width 19.5 mm) is not available with pedestal.

# Auto Switch Mounting


## Auto Switch Proper Mounting Position (Detection at Stroke End) and Its Mounting Height

### Rod mounting

#### D-P3DW□□

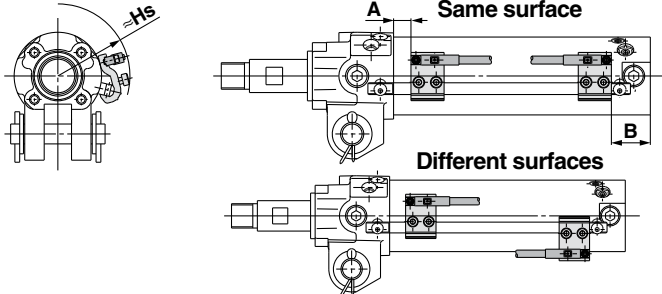


#### D-P4DW□□

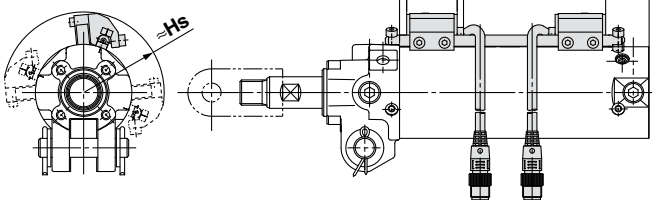

Note) The above drawing is the switch rod mounting example for the D-P4DWS□.


#### D-P7□□□□

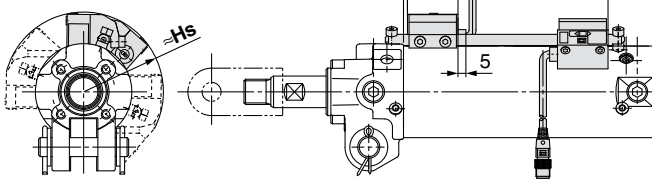

Note) The above drawing is the switch rod mounting example for the D-P79WSE.

### Band mounting

#### D-P4DW□□

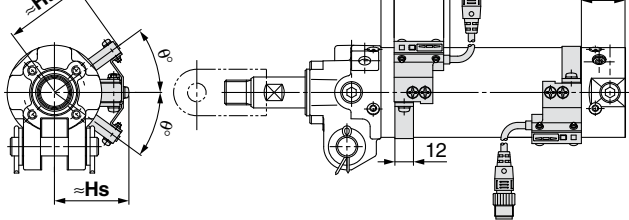

Note) The above drawing is the switch band mounting example for the D-P4DWS□.

## Minimum Stroke for Auto Switch Mounting

Unit: mm

Auto switch model	With 1 pc.	With 2 pcs.	
		Different surfaces	Same surface
D-P3DW□□	15	30	75
D-P4DW□□	50	50	
D-P79WSE			
D-P74□			

Note) When two D-P3DW□□ are mounted to the cylinder with stroke 50 mm, mount them on different surfaces.

**Other than the applicable auto switches listed in "How to Order," the following auto switches are mountable.**  
 \* For magnetic field resistant 2-color indication solid state auto switches, auto switches with pre-wired connector (D-P4DW□DPC) are also available. Refer to the Best Pneumatics No.3 for details.

### Auto Switch Mounting Position and Its Height:

#### Rod Mounting Style

Unit: mm

Auto switch model	Symbol	Auto switch set value and its height		
		ø40	ø50	ø63
D-P3DW□□	A	8.5	6	6
	B	24	29	29
	Hs	44.5	48.5	56
D-P4DW□□	A	6	3.5	3.5
	B	21	26.5	26.5
	Hs	45.5	51	58.5
D-P79WSE D-P74□	A	3.5	0	0
	B	22.5	25	25
	Hs	47.5	51	57.5

Note 1) The mounting position should be referred for reference only for the auto switch mounting position at the stroke end detection. Adjust the auto switch after confirming the operation to set actually.

Note 2) The auto switch mounting position is temporarily set at the time of shipping from our factory. Change it to the desired position in accordance to your facility.

Note 3) For 2-color indication, mount the switch in the middle of the green indication.

### Auto Switch Mounting Position and Its Height:

#### Band Mounting Style/D-P4DW□□

Unit: mm

Auto switch model	Symbol	Auto switch set value and its height		
		ø40	ø50	ø63
D-P4DW□□	A	8	4.5	4.5
	B	20.5	27.5	27.5
	Hs	43	48	55
	Ht	46	51.5	58.5
	θ	45°	36°	33°

Note 1) The mounting position should be referred for reference only for the auto switch mounting position at the stroke end detection. Adjust the auto switch after confirming the operation to set actually.

Note 2) As for the D-P4DW□□, band mounting style, the switch mounting bracket and the auto switch have to be ordered separately. For details, refer to page 5.

Note 3) For 2-color indication, mount the switch in the middle of the green indication.

## Operating Range


Unit: mm

Auto switch model		Bore size		
		40	50	63
D-P3DW□□	Rod mounting	4	5	6
	Rod mounting	4	4	4.5
D-P4DW□□	Band mounting	5	5	5.5
	Rod mounting	8	9	9.5

\* Values which include hysteresis are for guideline purpose only, they are not a guarantee (assuming approximately ±30% dispersion) and may change substantially depending on the ambient environment.


## Auto Switch Mounting Bracket/Part No.

### Switch mounting rod assembly/Auto switch mounting bracket assembly

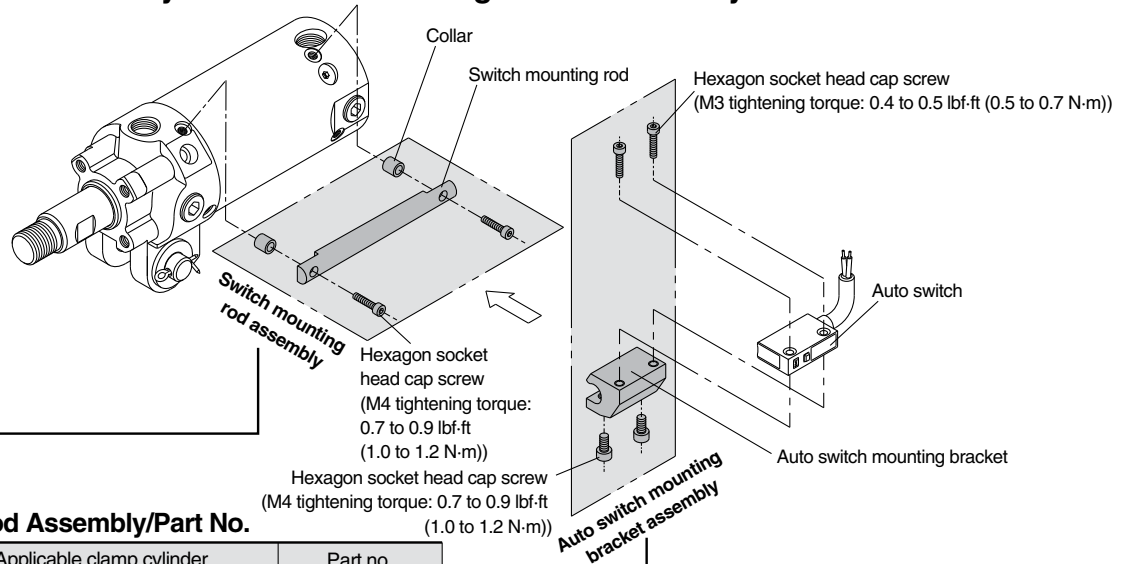


### Switch Mounting Rod Assembly/Part No.

Applicable series	Applicable clamp cylinder	Part no.
<b>Dedicated to CKP1□40</b>	CKP1□40-50Z	CKP40-RZ050
	CKP1□40-75Z	CKP40-RZ075
	CKP1□40-100Z	CKP40-RZ100
	CKP1□40-125Z	CKP40-RZ125
	CKP1□40-150Z	CKP40-RZ150
<b>CKG1□40/50/63</b>	CKG1□40-50Z	CKG40-RZ050
	CKG1□50-50Z/CKP1□50-50Z	
	CKG1□63-50Z/CKP1□63-50Z	
	CKG1□40-75Z	CKG40-RZ075
	CKG1□50-75Z/CKP1□50-75Z	
	CKG1□63-75Z/CKP1□63-75Z	
<b>CKP1□50/63</b>	CKG1□40-100Z	CKG40-RZ100
	CKG1□50-100Z/CKP1□50-100Z	
	CKG1□63-100Z/CKP1□63-100Z	
<b>Common</b>	CKG1□40-125Z	CKG40-RZ125
	CKG1□50-125Z/CKP1□50-125Z	
	CKG1□63-125Z/CKP1□63-125Z	
	CKG1□40-150Z	CKG40-RZ150
	CKG1□50-150Z/CKP1□50-150Z	
	CKG1□63-150Z/CKP1□63-150Z	
	CKG1□50-200Z/CKP1□50-200Z	CKG40-RZ200
CKG1□63-200Z/CKP1□63-200Z		

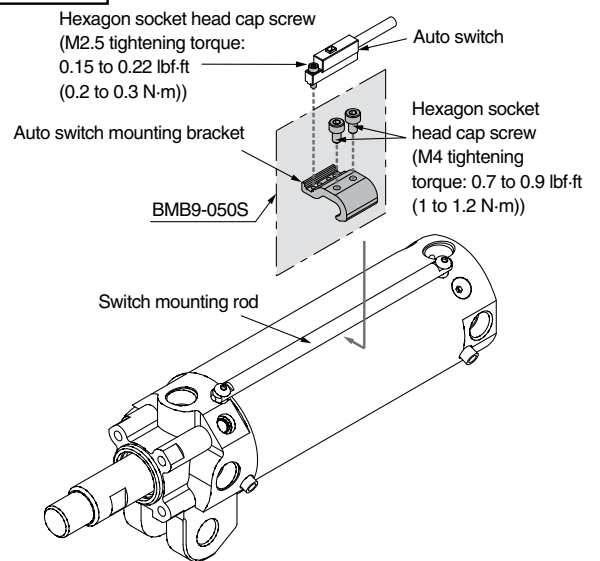

### Auto switch mounting bracket (Band mounting)

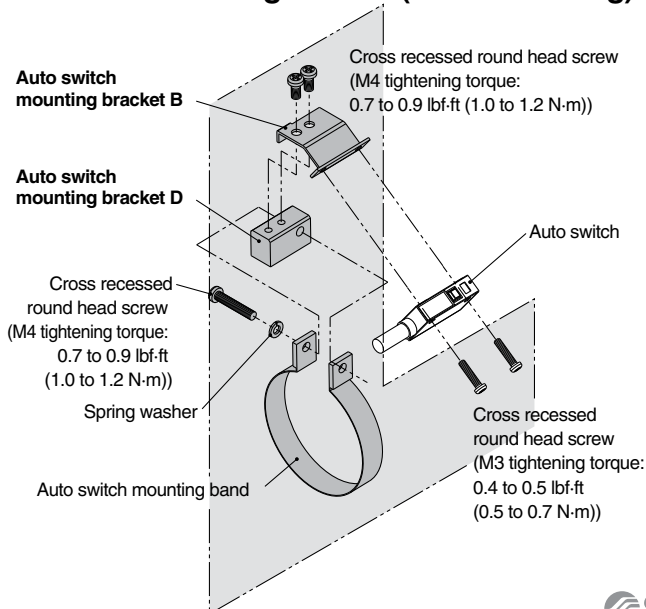

### Auto Switch Mounting Bracket Assembly/Part No.

Applicable cylinder series	Applicable auto switch model	Auto switch mounting bracket part no.		
		40	50	63
<b>CKG1</b>	D-P3DWSC D-P3DWSE D-P3DW/L/Z	BMB9-050S		
	D-P4DWSC D-P4DWSE D-P4DWL/Z	BK1T-040		
	D-P79WSE D-P74L/Z	BAP1T-040		

### Auto Switch Mounting Bracket (Band Mounting)/Part No.

Auto switch mounting bracket part no.	Applicable auto switch model	Applicable clamp cylinder
BA8-040	D-P4DWSC	<b>CKG1□40</b>
BA8-050	D-P4DWSE	<b>CKG1□50</b>
BA8-063	D-P4DWL/Z	<b>CKG1□63</b>



# Standard Auto Switch Mounting

## Band Mounting Style/Standard Auto Switch

The built-in standard magnet clamp cylinder/the CKG□ series can be attached to the band mounting style/standard auto switch as shown below.

### ⚠ Caution

The standard auto switch cannot be used in a magnetic field environment.

For information on our cylinders that can be fitted with a magnetic field resistant auto switch, refer to page 1.

**Built-in standard magnet** CK G 1

• **Auto switch type: Band mounting style/Standard auto switch**

• **Number of auto switches**

Nil	Without auto switch
-----	---------------------

Nil	2 pcs.
S	1 pc.

Note) Select applicable auto switch models from the table below.

### Mountable Auto Switches: Band Mounting/Standard Auto Switch/Refer to the Best Pneumatics No.3. for auto switch specifications.


Applicable cylinder series	Type	Electrical entry	Indicator light	Wiring (Output)	Load voltage			Auto switch model	Lead wire length (m)				Applicable load	
					DC	5 V	AC		0.5 (Nil)	1 (M)	3 (L)	5 (Z)		
CKG1	Solid state auto switch	Grommet	Yes	2-wire	24 V	5 V 12 V	—	M9B	●	●	●	○	—	Relay, PLC
								M9BW	●	●	●	○		
	Reed auto switch	Grommet	Yes	2-wire	24 V	12 V	100 V 100 V 200 V	A93	●	—	●	●		
								B54	●	—	●	●		

Note 1) Lead wire length symbol: 0.5 m..... Nil (Example) M9BW  
 1 m..... M (Example) M9BWM  
 3 m..... L (Example) M9BWL  
 5 m..... Z (Example) M9BWZ


Note 2) Auto switches marked with "○" are produced upon receipt of order.  
 Note 3) PLC: Programmable Logic Controller

## Auto Switch Mounting Position (Detection at Stroke End) and Its Mounting Height

### D-M9B(W)/A93

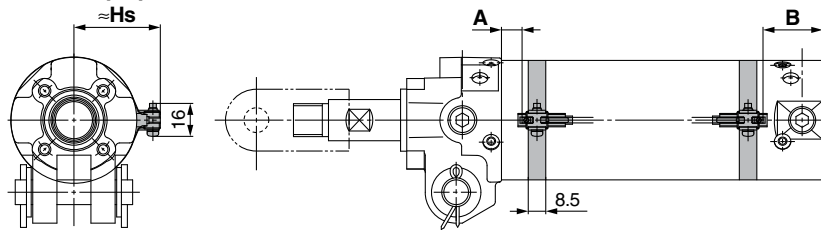

### D-B54

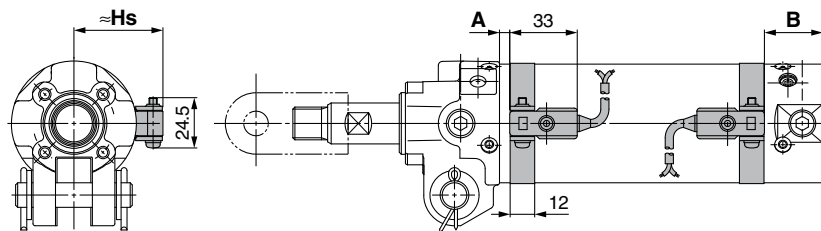

### Minimum Stroke for Auto Switch Mounting Unit : mm

Auto switch model	With 1 pc.	With 2 pcs. (Different surfaces)	With 2 pcs. (Same surface)
D-M9B	50	50	50
D-M9BW			
D-A93	50	50	75
D-B54			

### Auto Switch Mounting Position and Its Height Unit : mm

Auto switch model	Symbol	Auto switch set value and its height		
		ø40	ø50	ø63
D-M9B D-M9BW	A	13	10.5	10.5
	B	28	33.5	33.5
	Hs	35	40.5	47.5
D-A93	A	10	7.5	7.5
	B	25	30.5	30.5
	Hs	35	40.5	47.5
D-B54	A	4.5	1	1
	B	18	24	24
	Hs	38	43.5	50.5

Note 1) The mounting position should be referred for reference only for the auto switch mounting position at the stroke end detection. Adjust the auto switch after confirming the operation to set actually.

Note 2) The auto switch mounting position is temporarily set at the time of shipping from our factory. Change it to the desired position in accordance to your facility.

Note 3) For 2-color indication, mount the switch in the middle of the green indication.

### ⚠ Caution

As for the precautions on the auto switches, product specifications, refer to pages 16 to 18.

## Auto Switch Mounting Bracket Assembly/Part No.

Auto switch model	Auto switch mounting bracket part no.		
	40	50	63
D-M9B D-M9BW D-A93	Note) BMA3-040	Note) BMA3-050	Note) BMA3-063
D-B54	BA-04	BA-05	BA-06

Note) This is the set part number for the auto switch mounting band (BMA2-□□□A) and holder set (BJ5-1/switch bracket: transparent). The switch bracket (nylon) cannot be used in environments exposed to alcohol, chloroform, methylamines, hydrochloric acid and sulfuric acid, as this part will deteriorate. Please consult with SMC regarding other chemicals.

## Operating Range

Auto switch model	Bore size		
	40	50	63
D-M9B	3.5	4	4
D-M9BW	5.5	6.5	7
D-A93	8	8	9
D-B54	10	10	11


\* Values which include hysteresis are for guideline purpose only, they are not a guarantee (assuming approximately ±30% dispersion) and may change substantially depending on the ambient environment.

# Prior to Use


## Auto Switch Connection and Example

### Sink Input Specifications

#### 3-wire, NPN

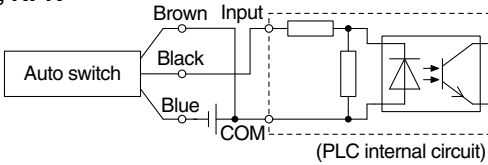


#### 2-wire

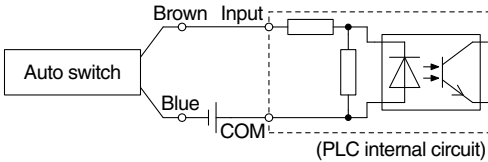


### Source Input Specifications

#### 3-wire, PNP

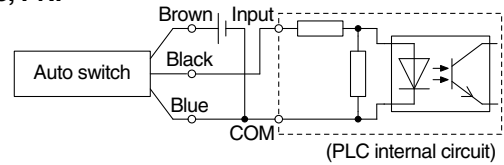

#### 2-wire

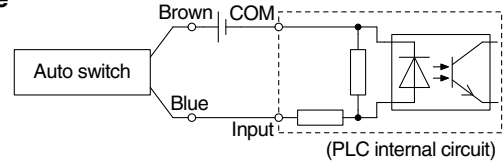


Connect according to the applicable PLC input specifications, as the connection method will vary depending on the PLC input specifications.

### Example of AND (Series) and OR (Parallel) Connection


\* When using solid state auto switches, ensure the application is setup so the signals for the first 50 ms are invalid.

#### 3-wire AND connection for NPN output


(Using relays)

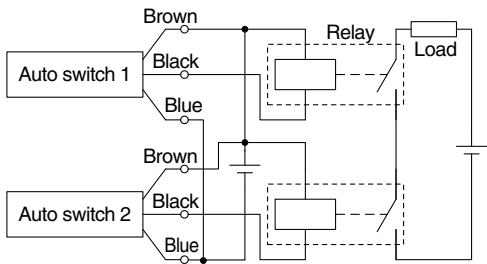

(Performed with auto switches only)




#### 3-wire OR connection for NPN output

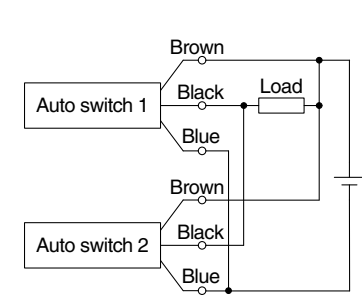


#### 3-wire AND connection for PNP output


(Using relays)

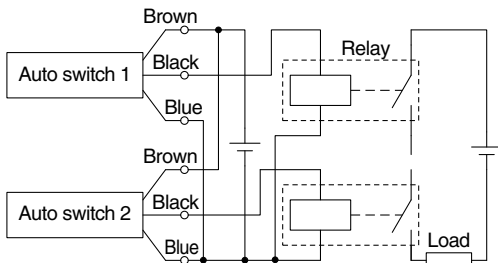


(Performed with auto switches only)



#### 3-wire OR connection for PNP output

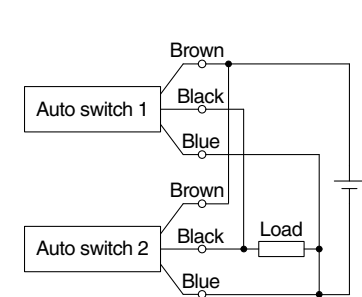

#### 2-wire AND connection




When two auto switches are connected in series, a load may malfunction because the load voltage will decline when in the ON state. The indicator lights will light up when both of the auto switches are in the ON state. Auto switches with load voltage less than 20 V cannot be used.

$$\begin{aligned} \text{Load voltage at ON} &= \text{Power supply voltage} - \\ &\quad \text{Residual voltage} \times 2 \text{ pcs.} \\ &= 24 \text{ V} - 4 \text{ V} \times 2 \text{ pcs.} \\ &= 16 \text{ V} \end{aligned}$$

Example: Power supply is 24 VDC  
Internal voltage drop in auto switch is 4 V.

#### 2-wire OR connection



(Solid state)  
When two auto switches are connected in parallel, malfunction may occur because the load voltage will increase when in the OFF state.

$$\begin{aligned} \text{Load voltage at OFF} &= \text{Leakage current} \times 2 \text{ pcs.} \times \\ &\quad \text{Load impedance} \\ &= 1 \text{ mA} \times 2 \text{ pcs.} \times 3 \text{ k}\Omega \\ &= 6 \text{ V} \end{aligned}$$

Example: Load impedance is 3 kΩ.  
Leakage current from auto switch is 1 mA.

(Reed)  
Because there is no current leakage, the load voltage will not increase when turned OFF. However, depending on the number of auto switches in the ON state, the indicator lights may sometimes grow dim or not light up, due to the dispersion and reduction of the current flowing to the auto switches.

# Series CK□1 Made to Order

Please contact SMC for detailed dimensions, specifications and lead times.



Symbol

**-X1515**

## 1 CK□1□40, 50, 63/With Air Cushion on Both Ends


Clamp cylinder with air cushion on both ends (with cushion in the clamped/unclamped side)

### ⚠ Caution

The air cushion is integrated in the unclamped side (head end) only for the standard type CK1/CKG1/CKP1 series, bore size 40, 50 and 63. When an air cushion is required on both ends, it is available as a made-to-order -X1515.

<b>Basic type</b>	CK1	Enter the standard model no.	-	X1515
<b>Built-in standard magnet type with magnetic field resistant auto switch</b>	CKG1	Enter the standard model no.	-	X1515
<b>Built-in strong magnet type with magnetic field resistant auto switch</b>	CKP1	Enter the standard model no.	-	X1515
With air cushion on both ends ●				

Dimensions: Same as standard type

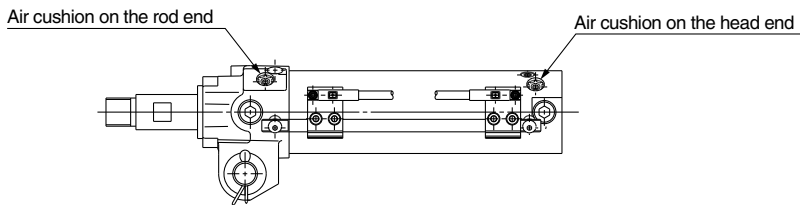

Specifications: Same as standard type

#### Specifications

Thread type	Rc1/4 only
Specifications other than above	Same as standard type



## Series CK□1

# Specific Product Precautions 1

Be sure to read before handling. Refer to inside back cover for Safety Instructions, "Handling Precautions for SMC Products" (M-E03-3) and the Operation Manual for Actuator and Auto Switch Precautions. Please download it via our website, <http://www.smcworld.com>

### Cushion/Speed Controller Adjustment

#### Danger

1. Retaining construction with crimping is integrated in the speed controller valve and cushion valve. However, do not rotate the cushion valve exceeding two turns, and do not rotate the speed controller valve exceeding four and half turns ( $\phi 40$ : maximum two turns). If 0.44 lbf-ft (0.6 N-m) or more of torque is applied, the valve may become loose and may jump out depending on the amount of air pressure.


#### Cushion Adjustment

The air cushion is built in on the head end for the CK1 series. The cushion is pre-adjusted at the time of shipping. However, re-adjust the cushion valve on the tube cover depending on the operating speed and load before use. When rotating the cushion valve clockwise, the orifice becomes smaller, resulting in stronger cushion reaction.

#### Speed Controller Adjustment

The speed controller (exhaust restrictor) is built in on the rod and head end for the CK1 series. The cushion is pre-adjusted at the time of shipping. However, re-adjust the speed controller valve ("S" marking on the rod cover) on each cover depending on the operating speed and load before use.

When rotating the speed controller valve clockwise, the orifice becomes smaller, which reduces the speed.

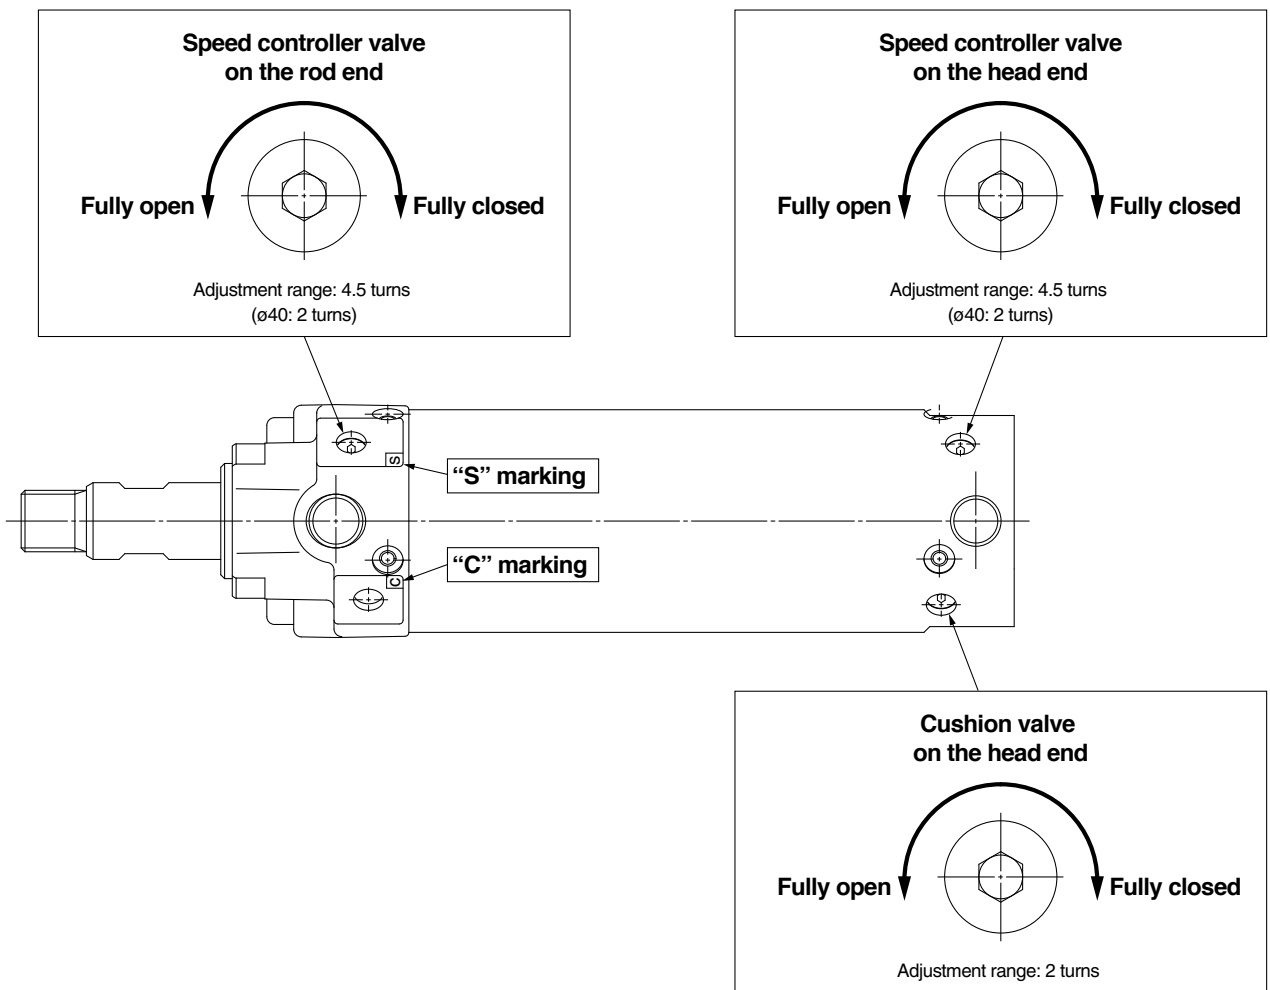



# Series CK□1 Specific Product Precautions 2

Be sure to read before handling. Refer to inside back cover for Safety Instructions, "Handling Precautions for SMC Products" (M-E03-3) and the Operation Manual for Actuator and Auto Switch Precautions. Please download it via our website, <http://www.smcworld.com>

## Piping Port/Switch Mounting Rod Location Change

### Piping Port Location Change


Piping is possible from 3 directions. When the piping port location is changed, carefully follow the instructions as detailed below.

### Warning

1. Do not leave out the component parts when the piping port location is changed.  
Even if one of the component parts is kept away, malfunction may occur, resulting in dangerous operation.
2. To prevent air leakage, re-wind the pipe tape and fit into the changed location when the piping port location is changed.


### Switch Mounting Rod Location Change

The switch mounting rod is mountable from 3 directions. When the switch mounting rod is changed, carefully follow the instruction as detailed below.

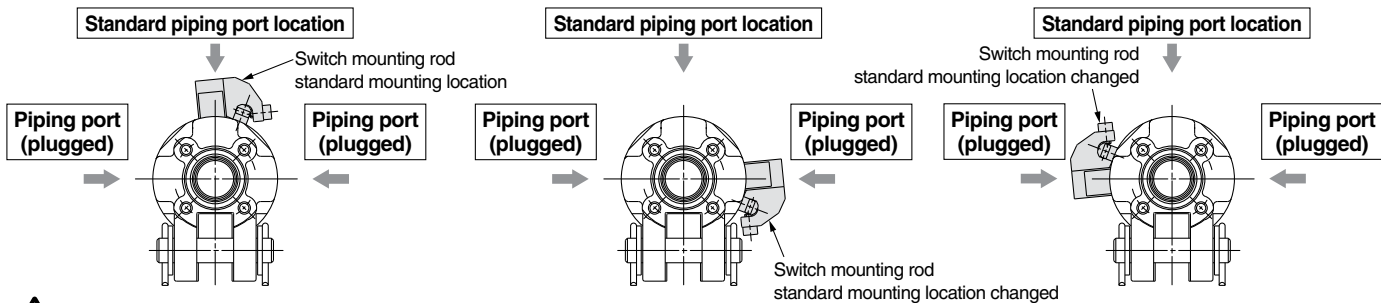

### Warning

1. Mount all the component parts to the changed location.  
Even if one of the component parts is kept away, the switch detection error etc. may occur. (Switch mounting rod, switch mounting spacer, hexagon socket head cap screw)
2. After the switch mounting rod location is changed, confirm that there is no interference with other parts before use.

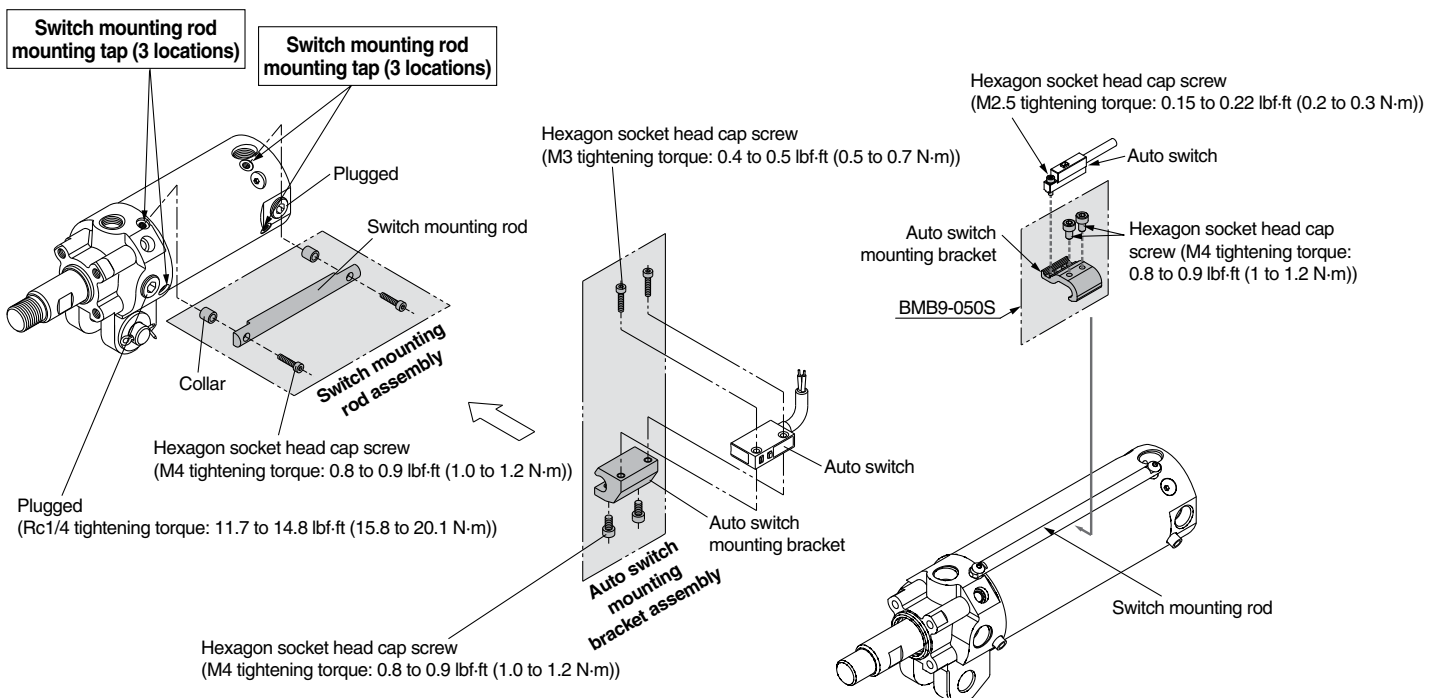





# Series CK□ 1

## Specific Product Precautions 3

Be sure to read before handling. Refer to inside back cover for Safety Instructions, "Handling Precautions for SMC Products" (M-E03-3) and the Operation Manual for Actuator and Auto Switch Precautions. Please download it via our website, <http://www.smcworld.com>

### Handling

Magnetic field resistant auto switches D-P79WSE/D-P74□ are specifically for use with built-in strong magnet type cylinders and are not compatible with general auto switches or cylinders. Built-in strong magnet type cylinders are labeled as follows.

Magnetic field resistant cylinder with built-in magnet  
(For use with auto switch D-P7)

### Mounting

1. The minimum stroke for mounting magnetic field resistant auto switches is 50 mm.
2. In order to fully use the capacity of magnetic field resistant auto switches, strictly observe the following precautions.
  - 1) Do not allow the magnetic field to occur when the cylinder piston is moving.
  - 2) When a welding cable or welding gun electrodes are near the cylinder, change the auto switch position to fall within the operational ranges shown in the graphs on page 18, or move the welding cable away from the cylinder.
  - 3) Cannot be used in an environment where welding cables surround the cylinder.
  - 4) Please consult with SMC when a welding cable and welding gun electrodes (something energized with secondary current) are near multiple auto switches.
3. In an environment where spatter directly hits the lead wire, cover the lead wire with protective tubing. Use protective tubing with inside diameter of  $\phi 8$  or more that has excellent heat resistance and flexibility.
4. Be careful not to drop objects, make dents, or apply excessive impact force when handling.
5. When operating two or more cylinders with magnetic field resistant auto switches in parallel and proximity, separate the auto switches from other cylinder tubes by an additional 30 mm or more.
6. Avoid wiring in a manner in which repeated bending stress or tension is applied to lead wires.
7. Please consult with SMC regarding use in an environment with constant water and coolant splashing.
8. Be careful of the mounting direction of the magnetic field resistant auto switch D-P79WSE. Be sure to face the soft-resin mold surface to the switch mounting bracket side for mounting.  
(Refer to page 10 for mounting example and the Best Pneumatics No.3 for soft-resin mold surface.)

### Wiring/Current and Voltage

1. Always connect the auto switch to the power supply after the load has been connected.
2. Series connection  
When auto switches are connected in series as shown below:

Note that the voltage drop due to the internal resistance of the LED increases.











# Series CK□ 1 Specific Product Precautions 4







Be sure to read before handling. Refer to inside back cover for Safety Instructions, "Handling Precautions for SMC Products" (M-E03-3) and the Operation Manual for Actuator and Auto Switch Precautions. Please download it via our website, <http://www.smcworld.com>

## Data: Magnetic Field Resistant Reed Auto Switches (D-P79WSE, D-P74□) Safety Distance

### Safety Distance from Side of Auto Switch

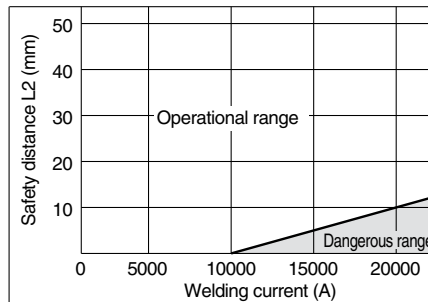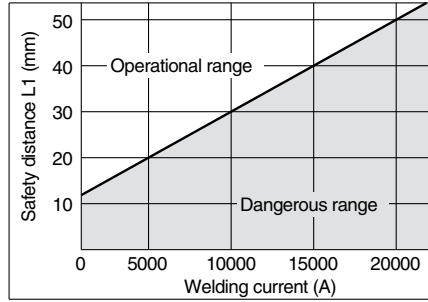

### Safety Distance from Top of Auto Switch

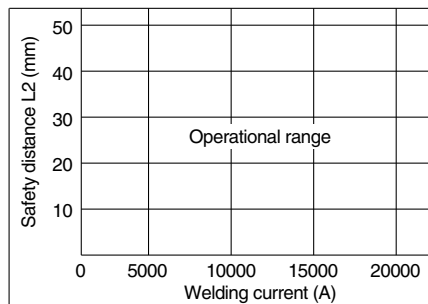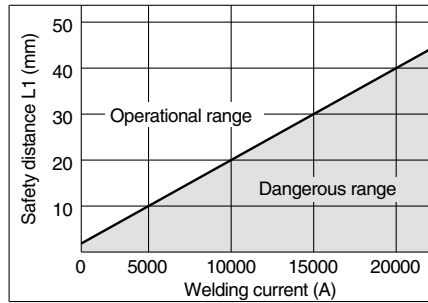

# Series CK□1 Related Products


Please contact SMC for detailed dimensions, specifications and lead times.

## 1 CKGA32/With Magnetic Field Resistant Auto Switch D-P4DW□□ (Band Mounting Style)

Band mounting of the magnetic field resistant auto switch (D-P4DW□□) to the built-in standard magnet clamp cylinder (CKGA32 series) is possible by ordering the auto switch mounting bracket and the auto switch separately.

**Built-in standard magnet type with magnetic field resistant auto switch**

CKGA32-100Y

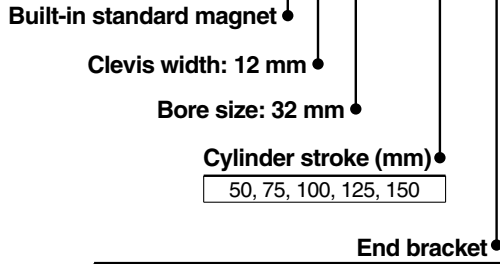

Note) A knuckle pin, cotter pins and flat washers are provided as a standard for Y.


### Specifications

Clevis width	12 mm	CKGA32 series
<b>Fluid</b>	Air	
<b>Proof pressure</b>	218 psi (1.5 MPa)	
<b>Maximum operating pressure</b>	145 psi (1.0 MPa)	
<b>Minimum operating pressure</b>	7.25 psi (0.05 MPa)	
<b>Ambient and fluid temperature</b>	14 to 140°F (-10 to 60°C)	
<b>Piston speed</b>	50 to 500 mm/s	
<b>Cushion</b>	With air cushion on both ends	
<b>Lubrication</b>	Non-lube	
<b>Stroke length tolerance</b>	+1.0 0	
<b>Mounting</b> (Note)	Double clevis	


Note) A clevis pin, cotter pins and flat washers are provided as a standard.

Applicable auto switch model	Auto switch mounting bracket part no.
D-P4DWSC	BA8-032
D-P4DWSE	
D-P4DWL	
D-P4DWZ	


### Dimensions

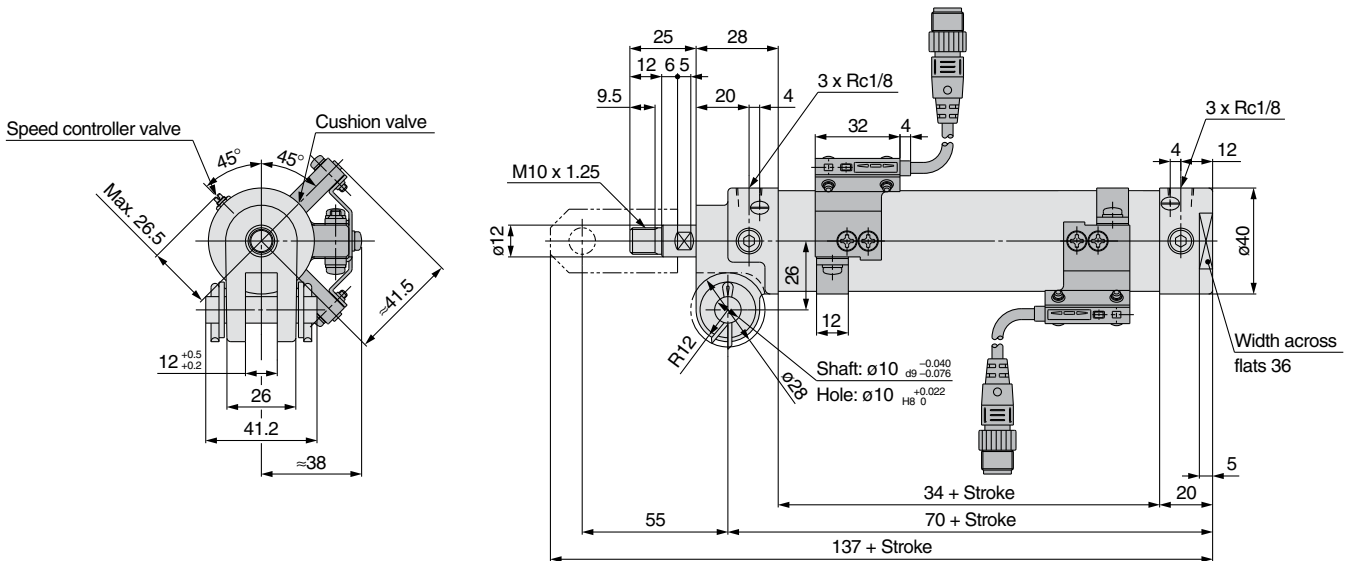

#### Single knuckle joint

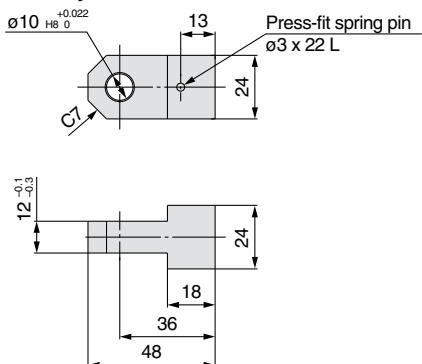

#### Double knuckle joint

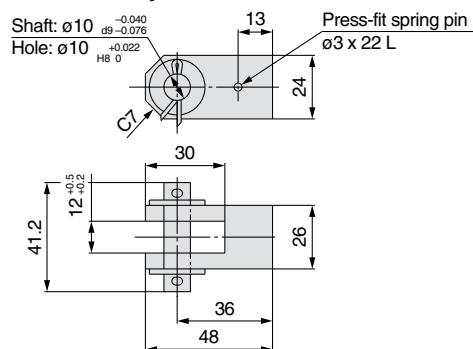


\* Please contact SMC for details of the CKGA32 series.

## 2 CKGA80, 100/CKPA80, 100/With Magnetic Field Resistant Auto Switch (Rod Mounting Style)

**Built-in standard magnet type with magnetic field resistant auto switch**

**Built-in strong magnet type with magnetic field resistant auto switch**

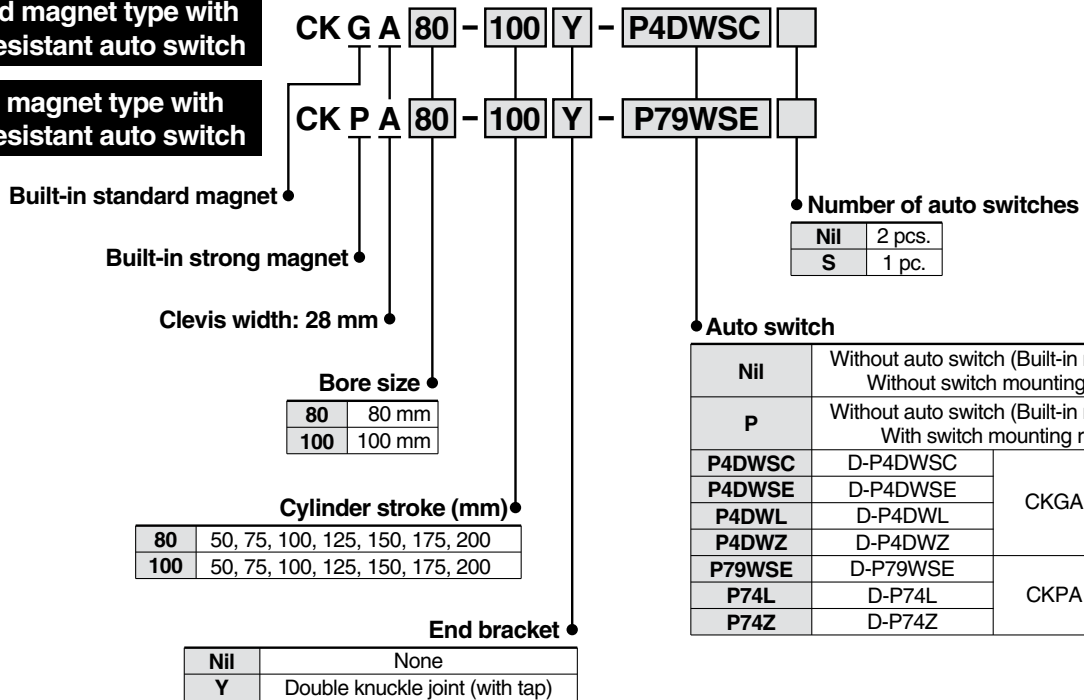

Note) A knuckle pin, cotter pins and flat washers are provided as a standard for Y.

### Specifications

<b>Clevis width</b>	28 mm	CKGA/CKPA series
<b>Fluid</b>	Air	
<b>Proof pressure</b>	218 psi (1.5 MPa)	
<b>Maximum operating pressure</b>	145 psi (1.0 MPa)	
<b>Minimum operating pressure</b>	7.25 psi (0.05 MPa)	
<b>Ambient and fluid temperature</b>	14 to 140 °F (-10 to 60°C)	
<b>Piston speed</b>	50 to 500 mm/s	
<b>Cushion</b>	With air cushion on both ends	
<b>Speed controller</b>	Equipped on both ends	
<b>Lubrication</b>	Non-lube	
<b>Stroke length tolerance</b>	+1.0 0	
<b>Mounting</b> <small>Note)</small>	Double clevis	

Note) A clevis pin, cotter pins and flat washers are provided as a standard.

### Auto Switch Mounting Bracket Assembly/Part No.

Applicable auto switch model	Auto switch mounting bracket part no.	
	80	100
D-P4DWSC	BAP2-063	
D-P4DWSE		
D-P4DWL		
D-P4DWZ		
D-P79WSE		
D-P74L	BAP1-063	
D-P74Z		

### Built-in Standard (Strong) Magnet Cylinder Part No.

- 1) Built-in standard (strong) magnet type without auto switch, without switch mounting rod



Symbol for the auto switch type is "Nil" as shown below.  
 CKGA: (Example) CKGA80-50Y  
 CKPA: (Example) CKPA80-50Y

- 2) Built-in standard (strong) magnet type without auto switch, with switch mounting rod

Symbol for the auto switch type is "P" as shown below.  
 CKGA: (Example) CKGA80-50Y-P  
 CKPA: (Example) CKPA80-50Y-P


## Dimensions

### CKGA80 Built-in standard magnet type/with magnetic field resistant auto switch (D-P4DWS□)

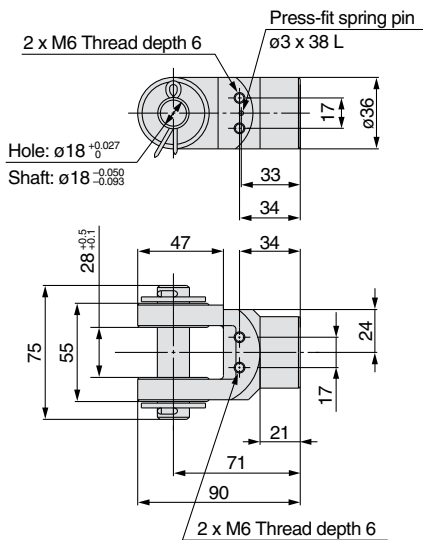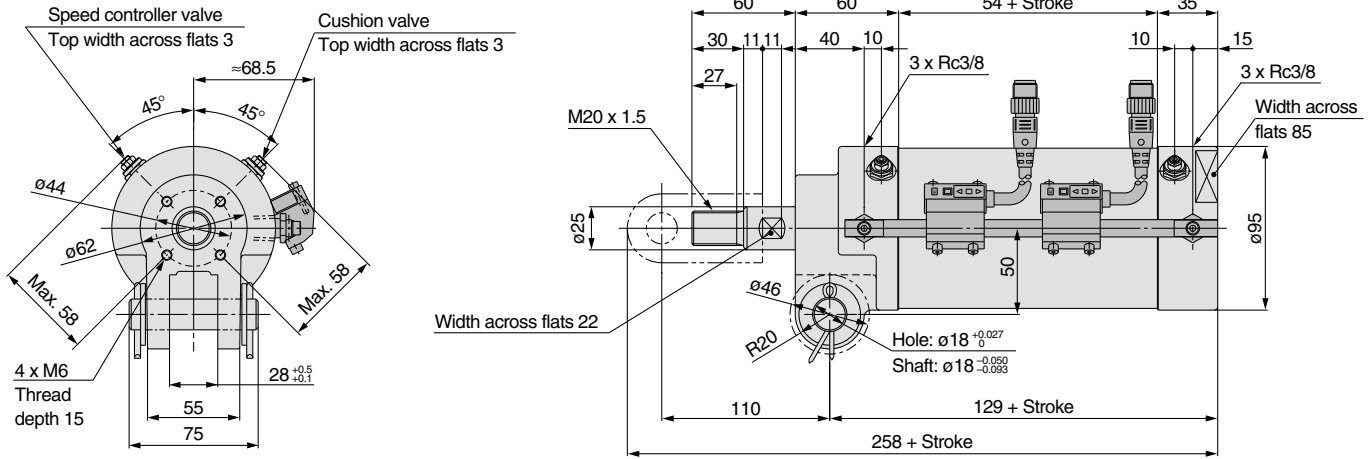

Double knuckle joint

### CKPA80 Built-in strong magnet type/with magnetic field resistant auto switch (D-P79WSE)

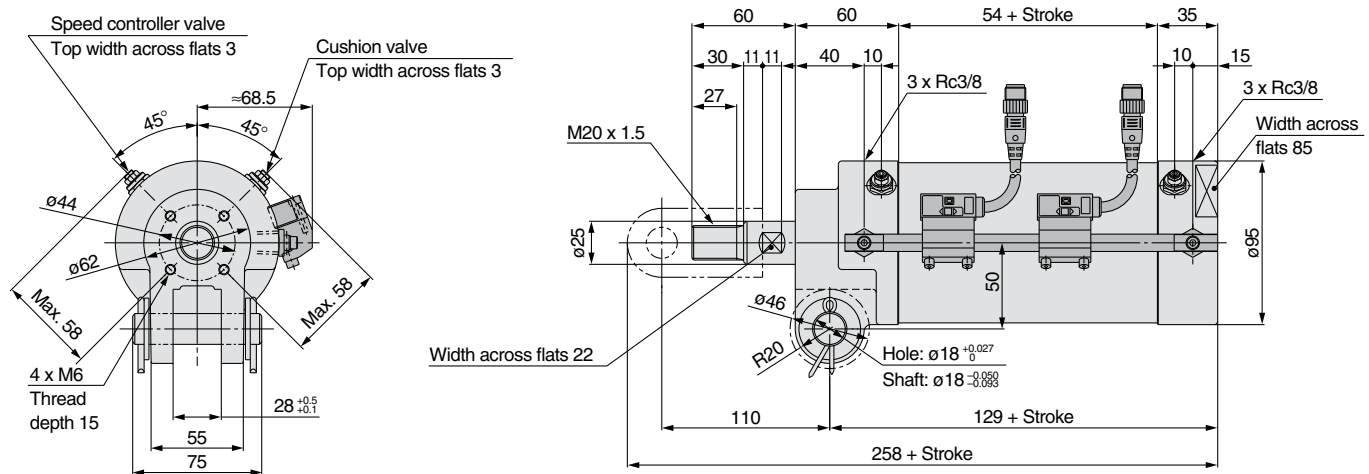




## 2 CKGA80, 100/CKPA80, 100/With Magnetic Field Resistant Auto Switch (Rod Mounting Style)


### Dimensions

#### CKGA100 Built-in standard magnet type/with magnetic field resistant auto switch (D-P4DWS□)

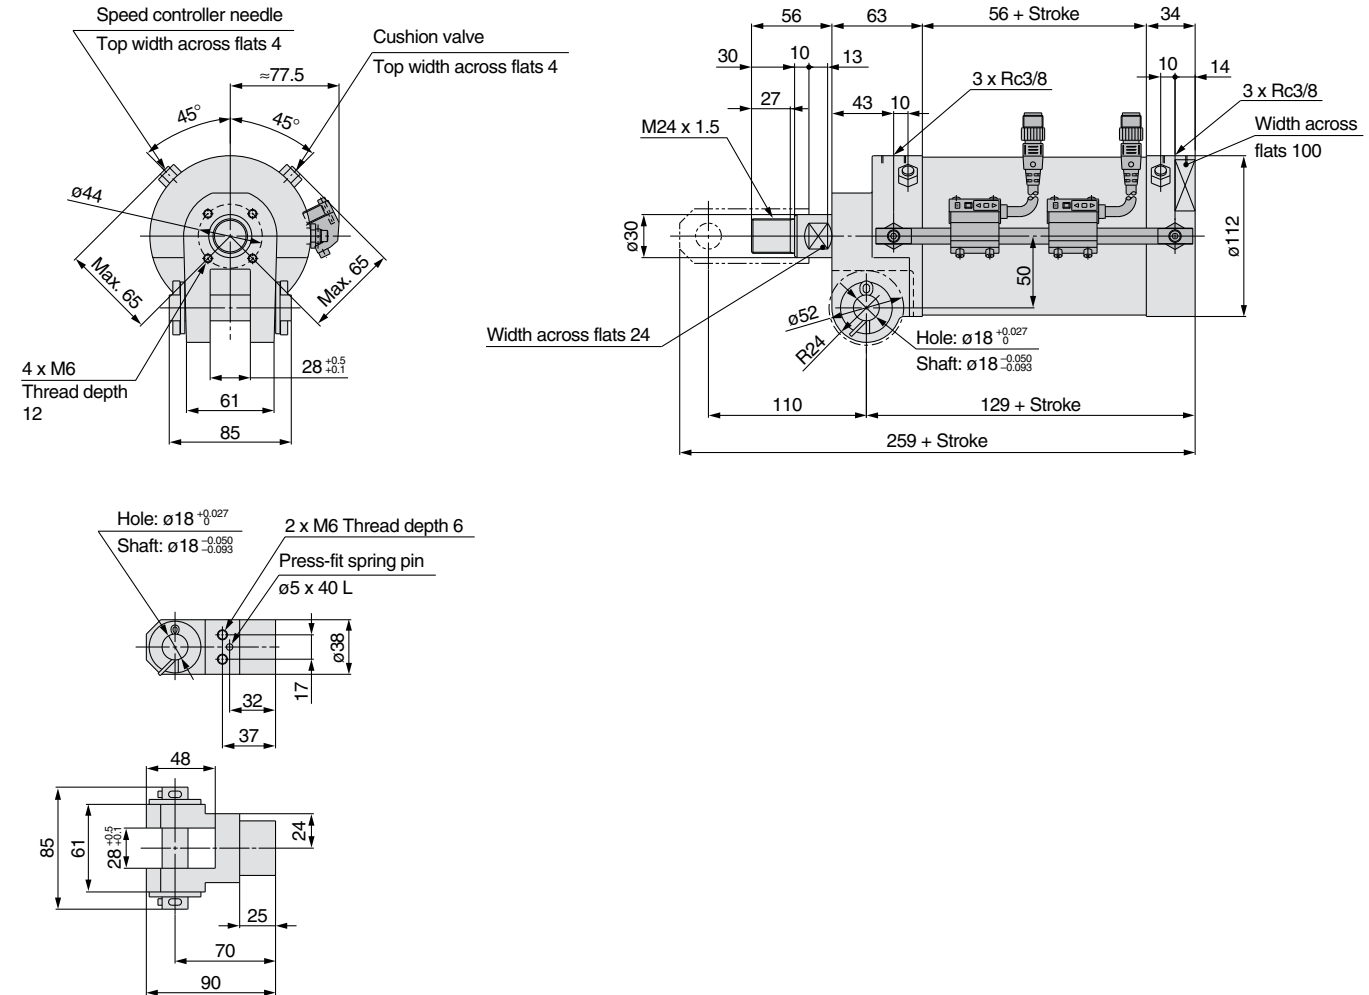

Double knuckle joint

#### CKPA100 Built-in strong magnet type/with magnetic field resistant auto switch (D-P79WSE)

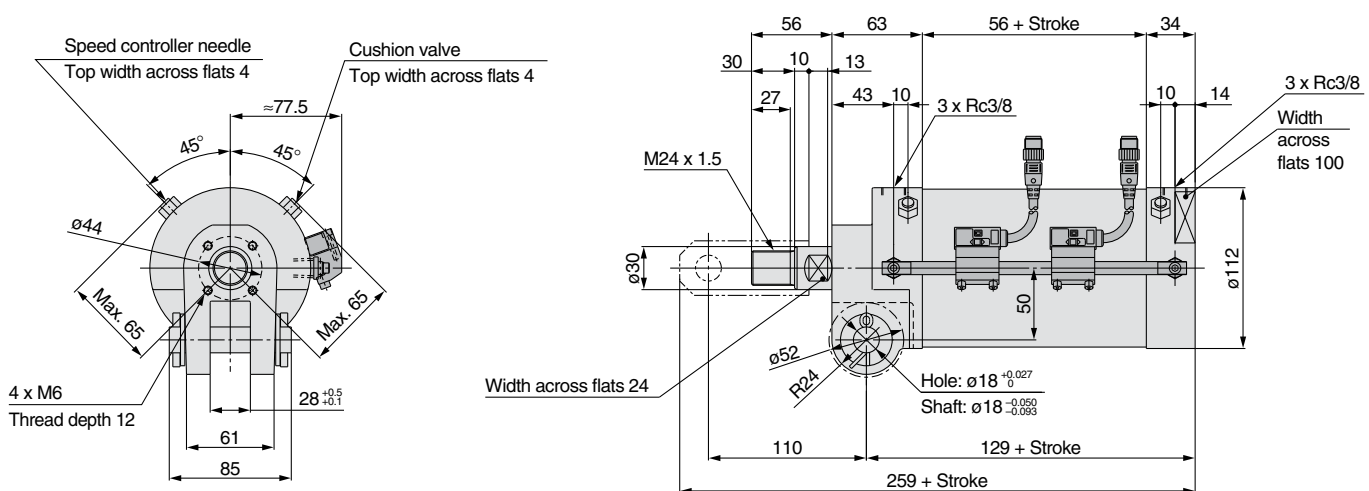

\* Please contact SMC for details of the CKGA□/CKPA□ series.

Symbol  
**-X2095**

**3 C(L)KG/C(L)KP25, 32, 40/Clamp Cylinder Slim Style**

The smallest class of clamp cylinder in the world

■ **ø25 is available.**

Weight 380 g Length 186.7 mm  
(ø25, 50 stroke without speed controller or auto switch)

■ **Comparison with existing model**

Weight reduced by up to 48%, total length reduced by 18%

	Weight (kg)	Length (mm)
Clamp cylinder <b>CKG-X2095</b>	<b>0.67</b> (1.31)	<b>146.7 + Stroke</b> (192 + Stroke)
Clamp cylinder with lock <b>CLKP-F-X2095</b>	<b>0.97</b> (1.70)	<b>182.2 + Stroke</b> (236 + Stroke)

Comparison with ø40, 50 stroke with double knuckle joint and speed controller.  
The values in the ( ) are for conventional model.


**Compact auto switch (D-P3DW)**  
Magnetic field resistant 2-color indication  
solid state auto switch

D-P3DW

Auto switch product volume reduced by 70%

D-P4DW

The auto switch mounting position is available from 3 directions.

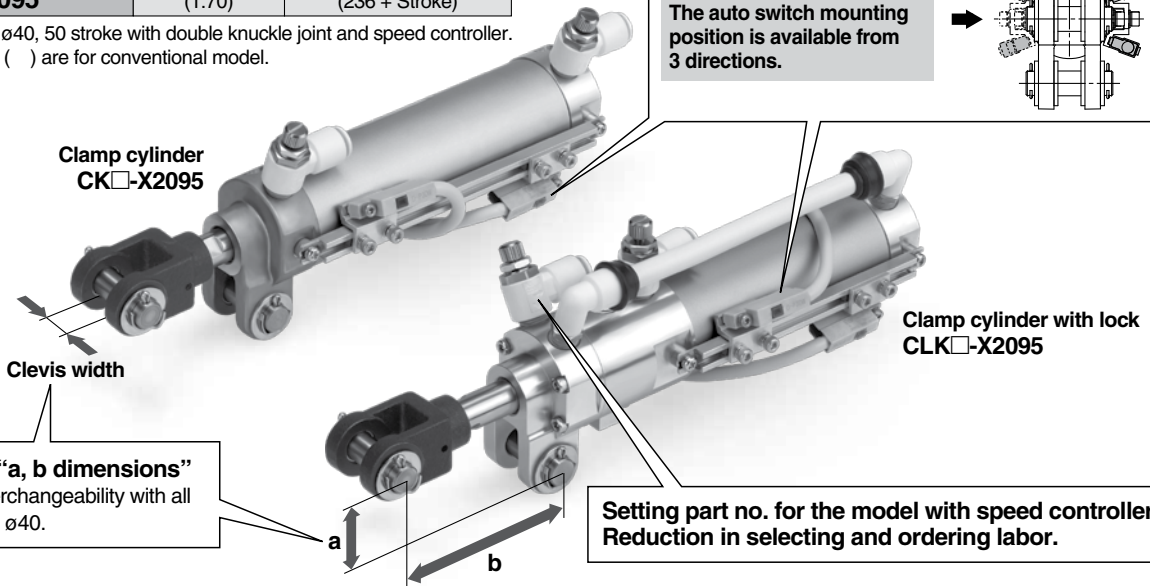


**Variations**


Model	Type	Series	Bore size	Stroke (mm)	Clevis width	End bracket	Option
Clamp cylinder	Built-in standard magnet type	D-P3DW D-P4DW	25, 32, 40	50, 75, 100 125, 150	A : 9 mm B : 12.5 mm	Double knuckle joint	Speed controllers with One-touch fittings (Both sides)
	Built-in strong magnet type	D-P7					
Clamp cylinder with lock	Built-in standard magnet type	D-P3DW D-P4DW	32, 40				
	Built-in strong magnet type	D-P7					


For details about this product, refer to the catalog at SMC website.

## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

\*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots – Safety.  
etc.

### Warning

#### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

#### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

#### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### Caution

#### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.

If anything is unclear, contact your nearest sales branch.

## Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

### Limited warranty and Disclaimer

#### 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)

Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.

#### 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.

This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.

#### 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

\*2) **Vacuum pads are excluded from this 1 year warranty.**

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

### Compliance Requirements

#### 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.

#### 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### Revision history

**Edition B** \* Addition of Made to Order (With air cushion on both ends)  
\* Number of pages from 24 to 28

RU

## Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

# Global Manufacturing, Distribution and Service Network

## Worldwide Subsidiaries

### North & South America

-  U.S.A. SMC Corporation of America
-  CANADA SMC Pneumatics (Canada) Ltd.
-  MEXICO SMC Corporation (México), S.A. de C.V.
-  BRAZIL SMC Pneumáticos do Brasil Ltda.
-  CHILE SMC Pneumatics (Chile) S.A.
-  COLOMBIA SMC Colombia Sucursal de SMC Chile S.A.
-  ARGENTINA SMC Argentina S.A.
-  BOLIVIA SMC Pneumatics Bolivia S.r.l.
-  VENEZUELA SMC Neumatica Venezuela S.A.
-  PERU (Distributor) IMPECO Automatización Industrial S.A.C.
-  ECUADOR (Distributor) ASSISTECH CIA. LTDA.













### Asia/Oceania

-  CHINA SMC(China)Co.,Ltd.
-  CHINA SMC Pneumatics (Guangzhou) Ltd.
-  HONG KONG SMC Pneumatics(Hong Kong)Ltd.
-  TAIWAN SMC Pneumatics(Taiwan)Co.,Ltd.
-  KOREA SMC Pneumatics Korea Co., Ltd.
-  SINGAPORE SMC Pneumatics(S.E.A.)Pte.Ltd.
-  MALAYSIA SMC Pneumatics(S.E.A.)Sdn.Bhd.
-  THAILAND SMC (Thailand) Ltd.
-  PHILIPPINES Shoketsu SMC Corporation
-  INDIA SMC Pneumatics(India)Pvt.Ltd.
-  ISRAEL (Distributor) Baccara Geva A.C.S. Ltd.
-  INDONESIA (Distributor) PT. Sinar Mutiara Cemerlang
-  VIETNAM (Distributor) Dy Dan Trading Co.,Ltd.
-  PAKISTAN (Distributor) Jubilee Corporation

### Asia/Oceania

-  SRI LANKA (Distributor) Electro-Serv(Pvt.)Ltd.
-  IRAN (Distributor) Abzarchian Co. Ltd.
-  U.A.E. (Distributor) Machinery People Trading Co. L.L.C.
-  KUWAIT (Distributor) Esco Kuwait Equip & Petroleum App. Est.
-  SAUDI ARABIA (Distributor) Assaggaff Trading Est.
-  BAHRAIN (Distributor) Mohammed Jalal & Sons W.L.L. Technical & Automotive Services
-  SYRIA (Distributor) Miak Corporation
-  JORDAN (Distributor) Atafawok Trading Est.
-  BANGLADESH (Distributor) Chemie International
-  AUSTRALIA SMC Pneumatics(Australia)Pty.Ltd.
-  NEW ZEALAND SMC Pneumatics(N.Z.)Ltd.
-  JAPAN SMC Corporation

### Europe/Africa

-  GERMANY SMC Pneumatik GmbH
-  SWITZERLAND SMC Pneumatik AG
-  U.K. SMC Pneumatics (U.K.) Ltd.
-  FRANCE SMC Pneumatik SA
-  SPAIN / PORTUGAL SMC España S.A.
-  ITALY SMC Italia S.p.A.
-  GREECE SMC HELLAS E.P.E
-  IRELAND SMC Pneumatics (Ireland) Ltd.
-  NETHERLANDS (Associated company) SMC Pneumatics BV
-  BELGIUM (Associated company) SMC Pneumatics N.V./S.A.
-  DENMARK SMC Pneumatik A/S
-  AUSTRIA SMC Pneumatik GmbH (Austria)

### Europe/Africa

-  CZECH REPUBLIC SMC Industrial Automation CZ s.r.o.
-  HUNGARY SMC Hungary Ipari Automatizálási Kft.
-  POLAND SMC Industrial Automation Polska Sp. z o.o.
-  SLOVAKIA SMC Priemyselna Automatizacia Spol s.r.o.
-  SLOVENIA SMC Industrijska Avtomatika d.o.o.
-  BULGARIA SMC Industrial Automation Bulgaria EOOD
-  CROATIA SMC Industrijska Automatika d.o.o.
-  BOSNIA AND HERZEGOVINA(Distributor) A.M. Pneumatik d.o.o.
-  SERBIA(Distributor) Best Pneumatics d.o.o.
-  UKRAINE(Distributor) PNEUMOTEC Corp.
-  FINLAND SMC Pneumatics Finland Oy
-  NORWAY SMC Pneumatics Norway AS
-  SWEDEN SMC Pneumatics Sweden AB
-  ESTONIA SMC Pneumatics Estonia Oü
-  LATVIA SMC Pneumatics Latvia SIA
-  LITHUANIA(LIETUVA) UAB "SMC Pneumatics"
-  ROMANIA SMC Romania S.r.l.
-  RUSSIA SMC Pneumatik LLC.
-  KAZAKHSTAN SMC Kazakhstan, LLC.
-  TURKEY (Distributor) Entek Pnömatik Sanayi ve Ticaret Şirketi
-  MOROCCO (Distributor) Soraflex
-  TUNISIA (Distributor) Bymys
-  EGYPT (Distributor) Saadani Trading & Industrial Services
-  NIGERIA (Distributor) Faraday Engineering Company Ltd.
-  SOUTH AFRICA (Distributor) Hyflo Southern Africa (Pty.) Ltd.

## U.S. & Canadian Sales Offices

### WEST


- Austin
- Dallas
- Los Angeles
- Phoenix
- Portland
- San Francisco
- Vancouver




### EAST

- Atlanta
- Birmingham
- Boston
- Charlotte
- Nashville
- New Jersey
- Rochester
- Tampa
- Montreal

### CENTRAL

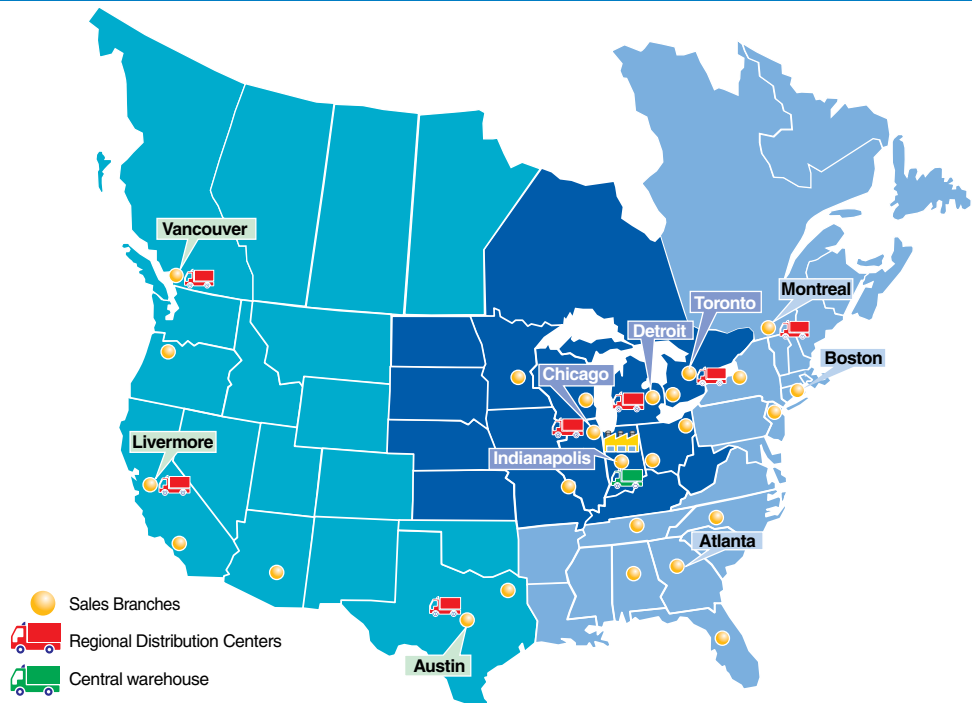- Chicago
- Cincinnati
- Cleveland
- Detroit
- Indianapolis
- Milwaukee
- Minneapolis
- St. Louis
- Toronto
- Windsor



-  Sales Branches
-  Regional Distribution Centers
-  Central warehouse

**SMC Corporation of America**  
10100 SMC Blvd., Noblesville, IN 46060  
[www.smcusa.com](http://www.smcusa.com)

**SMC Pneumatics (Canada) Ltd.**  
[www.smcpcneumatics.ca](http://www.smcpcneumatics.ca)

**(800) SMC.SMC1 (762-7621)**  
e-mail: [sales@smcusa.com](mailto:sales@smcusa.com)

For International inquiries: [www.smcworld.com](http://www.smcworld.com)

