

E2EC-M/-Q

CSM_E2EC-M/-Q_DS_E_5_1



Improved Durability with Stainless Steel Sensing Head



Models with improved spatter resistance ideal for welding also available.



**E2EC-M
E2EC-Q**
Sensing Surface has 10 times the strength against wear, compared to previous models.



**E2EC-M
E2EC-Q**
Sensing head is 18 mm in length. Ideal for use embedded in devices.



E2EC-Q
Prevents adherence of weld spatter to the Sensing Head. (Improved spatter-resistant model)



E2EC-Q
Employs a fluoride cable (Improved spatter-resistant model)

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.



Be sure to read *Safety Precautions* on page 5.

Ordering Information

Sensors [Refer to *Dimensions* on page 6.]

Appearance	Sensing distance	Output configuration	Model
			Operation mode: NO
	8 dia. 2 mm	DC 3-wire PNP	E2EC-MC2B1 2M
		DC 2-wire (polarity)	E2EC-MC2D1 2M
		DC 2-wire (no polarity) (3)-(4) pin arrangement	E2EC-QC2D1-M1GJ-T 0.3M

Accessories (Order Separately)

Sensor I/O Connector (M12, Sockets on One Cable End)

Models with Pre-wired Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately. [Refer to **XS2.**]

Appearance	Cable length	Sensor I/O Connector model	Applicable Proximity Sensors
	2 m	XS2F-D421-DD0	E2EC-QC2D1-M1GJ-T
	5 m	XS2F-D421-GD0	
	2 m	XS2F-D422-DD0	
	5 m	XS2F-D422-GD0	

Note: The Sensor I/O Connector models in the previous table are for standard cables. Be sure to use a heat-resistant cable (XS2F-D42□-□80F) when using the Sensor in environments susceptible to spatter.

Ratings and Specifications


Type Size Shielding Model	DC 3-Wire PNP Models		DC 2-Wire Models		DC 2-Wire Models (no polarity) (spatter-resistant type)
	8 dia. (Sensing Head)				
	Shielded				
	E2EC-MC2B1		E2EC-MC2D1		E2EC-QC2D1-M1GJ-T
Sensing distance		2 mm±15%		2 mm±10%	
Set distance		0 to 1.2 mm		0 to 1.4 mm	
Differential travel		15% max. of sensing distance			
Detectable object		Ferrous metals (The sensing distance will decrease with non-ferrous metal. Refer to <i>Engineering Data (Reference Value)</i> on page 3.)			
Standard sensing object		Iron, 8 × 8 × 1 mm			
Response frequency		100 Hz			
Power supply voltage (operating voltage range)		12 to 24 VDC, ripple (p-p): 10% max. (10 to 30 VDC)			
Current consumption		10 mA max.		---	
Leakage current		---		0.8 mA max.	
Control output	Load current	100 mA max.		3 to 50 mA	
	Residual voltage	2 V max. (Load current: 100 mA, Cable length: 2 m)		3 V max. (Load current: 50 mA, Cable length: 2 m) 5 V max. (Load current: 50 mA, Cable length: 2 m)	
Indicators		Operation indicator (yellow)		Operation indicator (red), Setting indicator (green)	
Operation mode (with sensing object approaching)		NO (normally open) Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 4 for details.			
Protection circuits		Power supply reverse polarity protection, Surge suppressor, Load short-circuit protection, Reversed output polarity protection		Surge suppressor, Load short-circuit protection	
Ambient temperature range		Operating and storage: -25 to 70°C (with no icing or condensation)			
Ambient humidity range		Operating and storage: 35% to 95% (with no condensation)			
Temperature influence		±20% max. of sensing distance at 23°C in the temperature range of -25 to 70°C			
Voltage influence		±5% max. of sensing distance at rated voltage in the rated voltage ±15% range		±1% max. of sensing distance at the rated voltage range in the voltage range of ±15%	
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		1,000 VAC for 1 min between current carrying-parts and case			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 1,000 m/s ² 10 times each in X, Y, Z directions			
Degree of protection		IEC IP67, In-house standards: oil-resistant (For Sensor Head only)			
Connection method		Pre-wired Connector Models (Standard cable length: 2 m)			Connector Models (Standard cable length: 0.3 m)
Weight (packed state)		Approx. 65 g			Approx. 95 g
Materials	Sensor Head	Case	Stainless steel (SUS303)		Stainless steel (SUS303) Fluoresin coated
		Sensing surface (thickness)	Stainless steel (SUS303) (0.2 mm)		Stainless steel (SUS303) Fluoresin coated (0.2 mm)
		Cable	Polyester elastomer (TPEE) (Shielded)		Fluoro-rubber (Shielded)
	Cable Amplifier	Case	ABS resin		Stainless steel (SUS303)
		Cable	Polyvinyl chloride (PVC)		Fluorocarbon cable (flame-resistant)
Accessories		Amplifier Mounting Bracket, instruction manual			

Note: Time is required for the sensing distance to stabilize after the power supply is turned ON. Confirm operation sufficiently in the actual operating environment and use the Sensor within the set distance to obtain a sufficient sensing distance.

Engineering Data (Reference Value)


Sensing Area

E2EC-MC2□□, E2EC-QC2D1-M1GJ-T

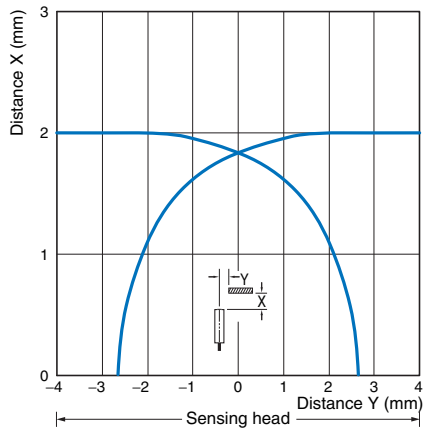


Influence of Sensing Object Size and Material

E2EC-MC2□□, E2EC-QC2D1-M1GJ-T

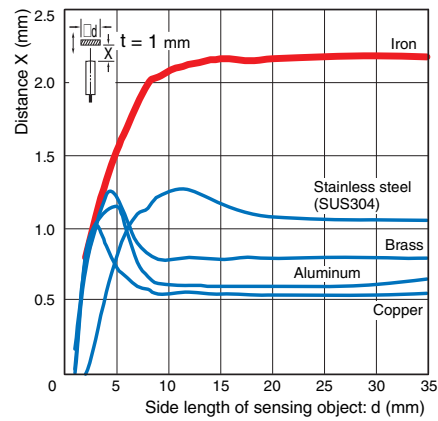


Residual Output Voltage

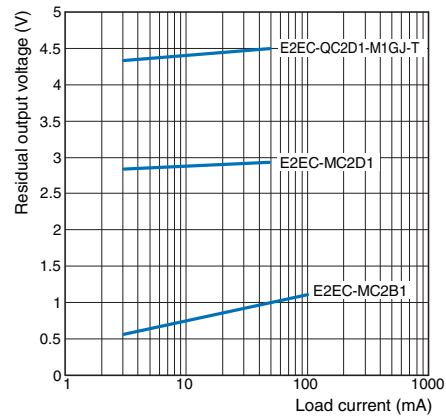

Leakage Current

DC 2-Wire Model, E2EC-MC2D1, E2EC-QC2D1-M1GJ-T

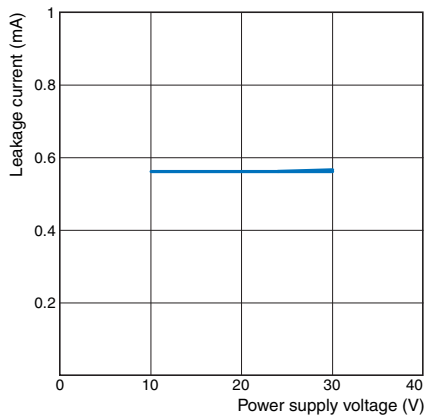

I/O Circuit Diagrams

DC 2-Wire Models

Operation mode	Model	Timing charts	Output circuit
Polarity NO	E2EC-MC2D1	<p>Non-sensing area Unstable sensing area Stable sensing area</p> <p>Sensing object</p> <p>Proximity Sensor</p> <p>(%) 100 70 (TYP) 0</p>	<p>Note: The load can be connected to either the +V or 0 V side.</p>
No polarity NO	E2EC-QC2D1-M1GJ-T	<p>Rated sensing distance</p> <p>ON Setting indicator (green) OFF</p> <p>ON Operation indicator (red) OFF</p> <p>ON Control output OFF</p>	<p>Note: The load can be connected to either the +V or 0 V side.</p> <p>Connector Terminal arrangement</p> <p>Note: Terminals (1) and (2) are not used.</p>

DC 3-Wire Models

Operation mode	Model	Timing charts	Output circuit
NO	E2EC-MC2B1	<p>Sensing object Present Not present</p> <p>Output transistor (load) ON OFF</p> <p>Operation indicator (yellow) ON OFF</p>	<p>Maximum load current: 100 mA</p>

Safety Precautions

Refer to *Warranty and Limitations of Liability* for detailed precautions.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Never use this product with an AC power supply. Otherwise, explosion may result.



Precautions for Correct Use

The following precautions must be observed to ensure safe operation.

- (1) Do not use the Sensor in an environment where inflammable or explosive gas is present.
- (2) Do not attempt to disassemble, repair, or modify any Sensors.
- (3) Power Supply Voltage
Do not use a voltage that exceeds the rated operating voltage range. Applying a voltage that is higher than the operating voltage range may result in explosion or fire.
- (4) Incorrect Wiring
Be sure that the power supply polarity and other wiring is correct. Incorrect wiring may cause explosion or fire.
- (5) Connection without a Load
If the power supply is connected directly without a load, the internal elements may explode or burn. Be sure to insert a load when connecting the power supply.
- (6) This Sensor received UL Standard certification under the assumption that the Sensor will be used in a Class 2 circuit. When using the Sensor in the United States or Canada, be sure to use it in a Class 2 circuit.

Precautions for Correct Use


Do not use this product under ambient conditions that exceed the ratings.

- (1) Do not use the Sensor in the following locations.
 1. Outdoor locations directly subject to sunlight, rain, snow, or water droplets
 2. Locations subject to atmospheres with chemical vapors, in particular solvents and acids
 3. Locations subject to corrosive gas
- (2) The Sensor may malfunction if used near ultrasonic cleaning equipment, high-frequency equipment, transceivers, cellular phones, inverters, or other devices that generate a high-frequency electric field. Refer to the *Technical Guide Photoelectric Sensors* for typical measures.
- (3) Laying the Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in incorrect operation and damage due to induction. Wire the Sensor using a separate conduit or independent conduit.
- (4) Cleaning
Never use thinner or other solvents. Otherwise, the Sensor surface may be dissolved.

● Design

Influence of Surrounding Metal

When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained.

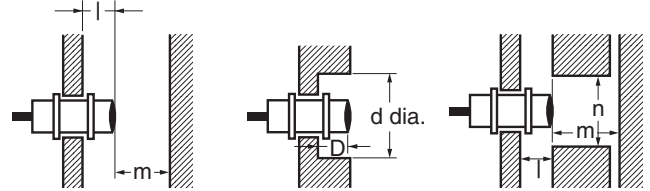


Influence of Surrounding Metal

(Unit: mm)

Model	Item Embedding material	l	d	D	m	n
E2EC-MC2B1	Iron	0	8	0	6	30
	Non-ferrous metal	10	50	10		50
E2EC-MC2D1	Iron	0	8	0		30
	Non-ferrous metal	10	50	10		50
E2EC-QC2D1-M1GJ-T	Iron	0	8	0		30
	Non-ferrous metal	10	50	10		50

Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.




Mutual Interference

(Unit: mm)

Model	Item	A	B
E2EC-MC2B1		40	30
E2EC-MC2D1			
E2EC-QC2D1-M1GJ-T			

● Mounting

- Refer to the following table for the torque and tightening ranges applied to mount the Sensor. Tightening must be as given in the following table.



Permissible Tightening Range and Torque


Model	Tightening	Set screw tightening
E2EC-MC2B1	8 to 16 mm	0.98 N·m
E2EC-MC2D1		
E2EC-QC2D1-M1GJ-T		

Amplifier Mounting Bracket


E2EC-MC2□□

Mounting

1. Insert the Amplifier into the trapezoidal end (i.e., the fixing side) of the Mounting Bracket.




2. Press the other end of the Amplifier onto the Bracket.




Dismounting

1. Lightly press the hook on the Mounting Bracket with a flat-blade screwdriver.




2. The Amplifier will be automatically released due to the spring force of the Mounting Bracket.



E2EC-QC2D1-M1GJ-T

Used the supplied mounting brackets to secure the Amplifier.

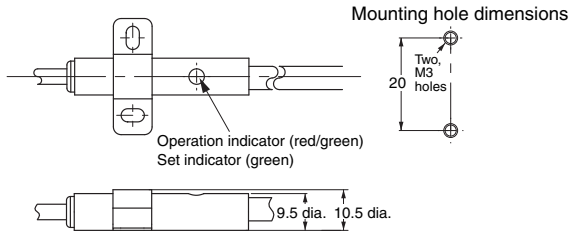


Dimensions


(Unit: mm)
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Sensors


E2EC-MC2B1, E2EC-MC2D1

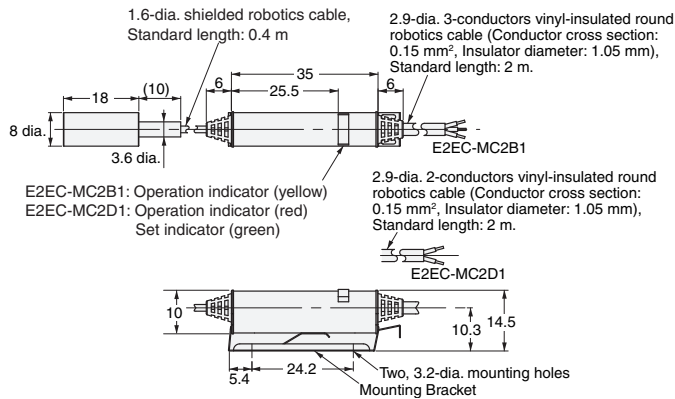

E2EC-QC2D1-M1GJ-T

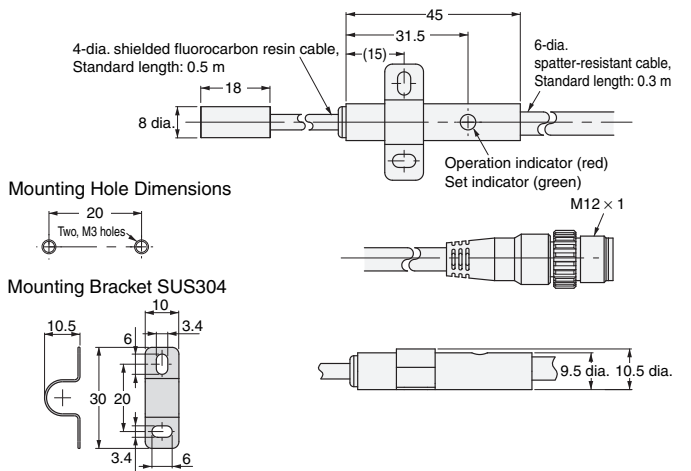

Sensing Head Mounting Hole Dimensions



Model	F (mm)
E2EC-M/-Q	8.5 ^{+0.5} ₀ dia.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.