


Plug - for reefer containers with MULTI-GRIP

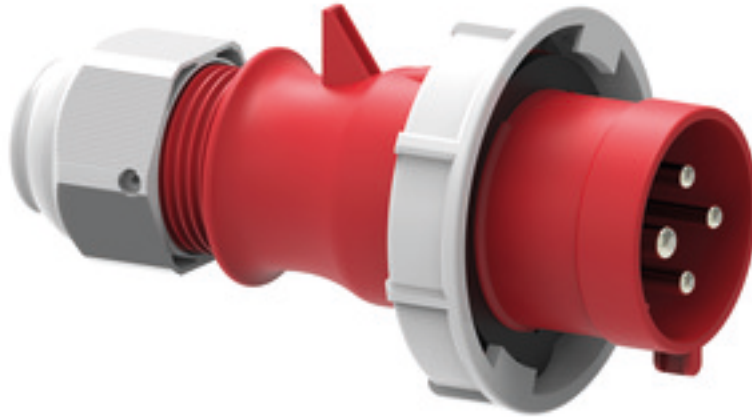


| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 210824 |
| EAN | 4024941146760 |
| Product category | TLS plug with MULTI-GRIP cable gland |
| Current | 32A |
| Number of poles | 4p |
| Arrangement of phases | 3P+PE |
| Position of earth contact | 3 h |
| Voltage | 380V~(50Hz) 440V~(60Hz) for reefer containers only |
| Frequency | 50/60Hz |

| Product description | |
|------------------------|--|
| Protection degree | IP67 |
| Colour code | red RAL 3000 |
| Colour of appliance | Enclosure red RAL 3000, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035 |
| Connection design | with screw terminal |
| Maximum conductor size | 6,0 qmm |
| Cable entry | Cable gland |
| Height | 170mm |
| Width | 94mm |
| Depth | 94mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|---|
| | one piece housing, MULTI-GRIP cable gland with gasket and integrated strain relief, For cable diameter from 11 up to max. 23,5 mm |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.247 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941146760 |

| Logistics data | |
|----------------|---------------|
| Length | 94 mm |
| Width | 94 mm |
| Height | 170 mm |
| Weight | 0.248 kg |
| Volume | 1,502.12 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941823326 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 2.676 kg |
| Volume | 13,588.4 ccm |

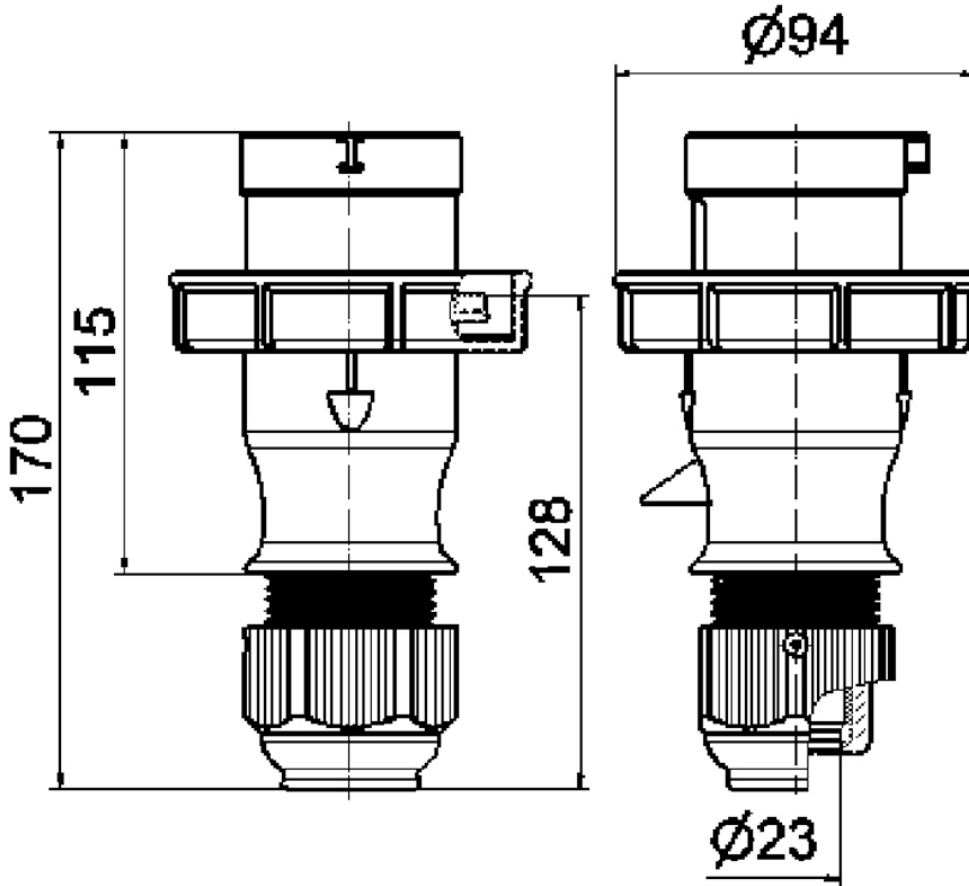

2 MB 128