

Electromechanical and solid-state Zelio® Relays

Catalog
2010



Schneider
Electric



Reduce the size of your enclosures and, at the same time, increase machine reliability...



with these new Zelio® Relays

> Electromechanical relays RSL

Only 6 mm wide, thus saving considerable space in your enclosures



6 mm wide

> Solid-state relays SSR

Enhanced service life provided by electronic technology



Enhanced service life

Contents

Introduction

Save Space with Zelio Relay RSL	4-5
Choose long life and silent operation with Zelio Relay SSR	6-7
Electromechanical and solid-state relays panorama	8-9

Technical characteristics

Zelio Relay RSL	12-17
Zelio Relay RSB, RXM, RUM, RPM	18-49
Zelio Relay ABR, ABS	54-73
Zelio Relay SSR	74-81

Make the most of your energy™



Save space with Zelio® Relay RSL

Only 6 mm wide

reduces the size of your enclosure


> A solution for any application

A versatile offer

- > An offer with maximum flexibility, comprising:
 - complete products: a single reference for a relay mounted on a socket,
 - > Wide choice of sockets available covering a range of voltages from 12 to 230 V.
 - select the relay and associated socket according to your application.

An offer that meets the most demanding standards

- Conformity with the European RoHS (Restriction of Hazardous Substances) directive.
- Conformity to international standards IEC/EN 61810-1, UL508, CSA C22.2 N°14, GOST.

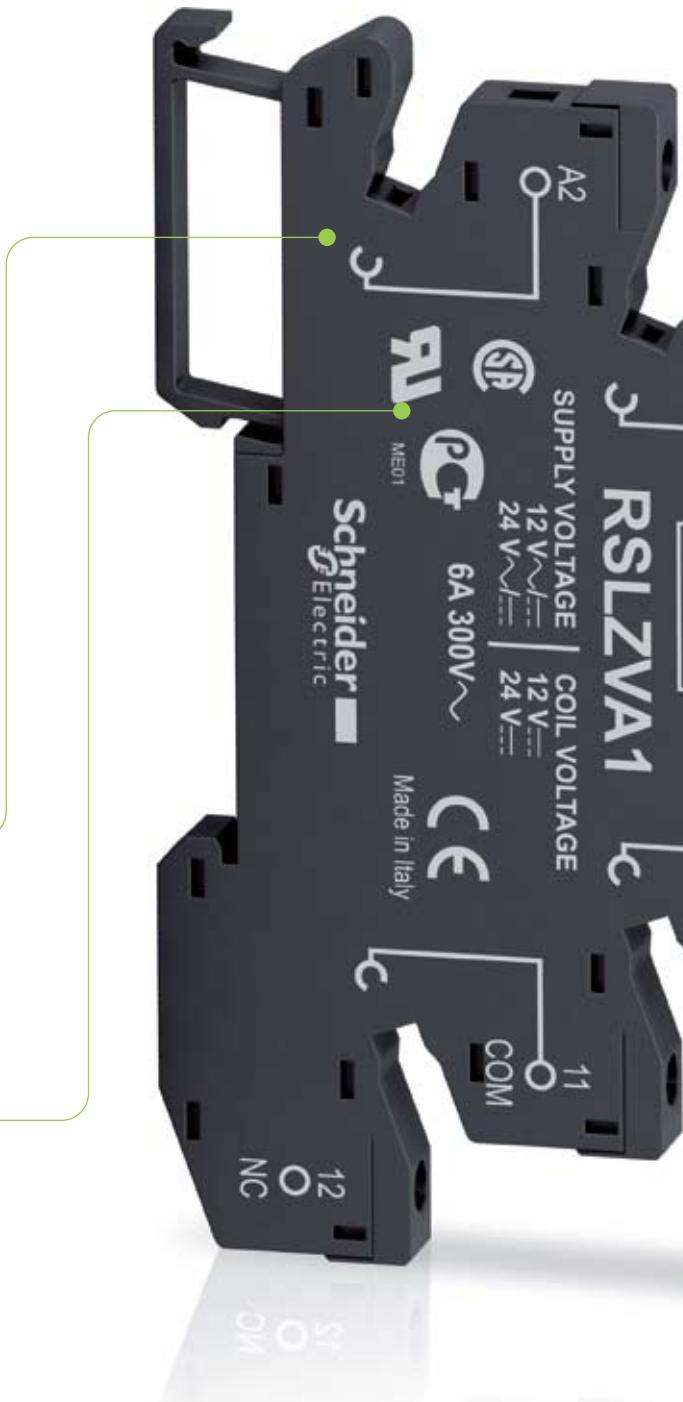

100% RoHS

Schneider Electric commits itself to reducing the environmental impact of its products

> Increased reliability in operation

Added protection in the socket

Built-in protection from transients and reverse polarity voltages.

LED indicator


Power on and relay status indication.



Standard 1 C/O relays

For general purpose load requirements.

Up to **6A**
switching

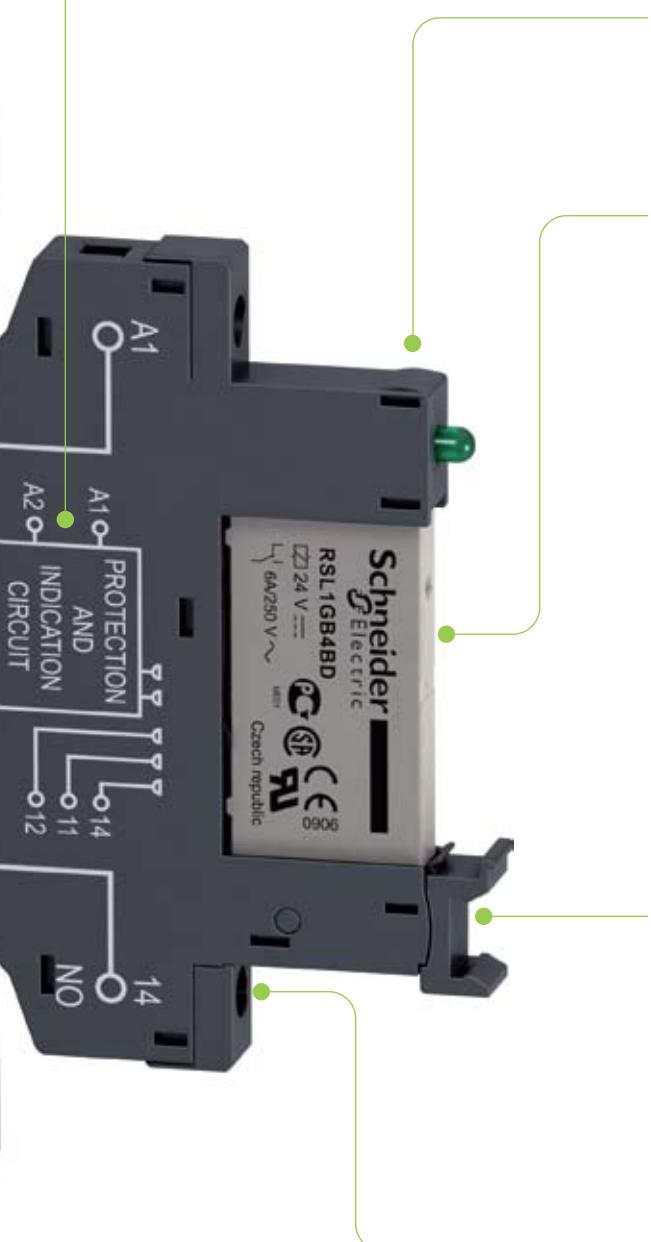

> Simple installation and maintenance

Simple maintenance of relay in socket
Using locking/unlocking lever.


Simple wiring
Bus jumpers available as accessories.

Simple mounting on DIN rail

2 connection choices
Suitable for the majority of your applications.



Screw connector



Spring terminal

Choose long life and silent operation with Zelio® SSR Relays

> Optimized heat exchange


The new solid-state relays **SSR** (Semiconductor Controlled Rectifier) outputs offer you two alternatives:

SSRD range

Integrated heat sink to provide factory tested heat exchange, that easily mounts by clipping directly onto DIN rail. Can also be panel mounted.

SSRP range

Panel mounted, either by itself or combined with a heat sink for applications requiring considerable heat exchange.

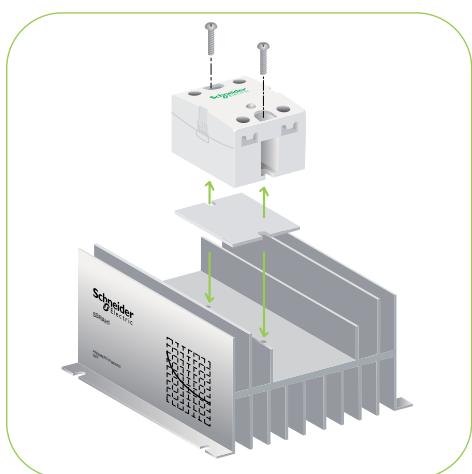


SSRP relay mounted on heat sink with thermal transfer pad



> Distinctive indication

A green LED on the front face of the products provides instant indication of the presence of input voltage.



> High performance

High breaking capacities

- From 10 to 125 A for relays SSRP
- From 10 to 45 A for relays SSRD

Wide supply voltage range

- From 3 to 32 VDC and 90 to 280 VAC

Outputs suited to applications

- From 24 to 280 VAC and 48 to 530/660 VAC

Space Saving SSRD series

- Only 22.5 mm and up to 45.5 mm wide

Enhanced service life

- Reduced preventive maintenance. SSR relays have little to no maintenance required once applied correctly.

Silence of electronic technology

- Complete silence when switching

Vibration resistant

- Even in the event of excessive vibration, the relay will not change state

Enhanced service life

due to electronic relay technology

Complete silence when switching

providing suitability for building and hospital applications

High switching frequency

particularly on packaging and textile machines

> Conformity to international standards

100% RoHS

Schneider Electric commits itself to reducing the environmental impact of its products

Panorama Zelio® Relays

Electromechanical relays



Contact configuration	1 C/O	1 or 2 C/O	1 or 2 C/O	2, 3 or 4 C/O
Current	6 A	8-12-16 A	5-12 A	6-10-12 A
Mounting	DIN rail		DIN rail	DIN rail or panel
Catalog numbers	RSL	RSB	ABR	RXM
Pages	12 to 17	20 to 23	54 to 73	24 to 31

Electromechanical relay advantages

- Wide number of contacts (up to 4)
- Easy installation and maintenance
- Socket compatible plug in relays
- Flag indicator to show contact status
- Lockable test button for checking circuit during build
- Magnetically isolated
- Coil voltage LED indicator

Electromechanical relays



2, 3 or 4 C/O 1, 2, 3 or 4 C/O 2 C/O or 2 N/O

10 A 15 A 30 A

DIN rail or panel

RUM **RPM** **RPF**

32 to 41 42 to 49 50 to 53

Solid-state relays



1 N/O 1 N/O 1 N/O

3 A 10 ...45 A 10 ...125 A

DIN rail DIN rail or panel Panel

ABS **SSRD** **SSRP**

54 to 73 74 to 81 74 to 81

Solid-state relay (SSR) advantages

- Enhanced service life
- Wide supply voltage range and high breaking current (up to 125 A), suited to packaging and textile machines
- Input power indicator
- Completely silent switching, suitable for building and hospital applications
- Vibration resistant

Relays			
Contact types			
Circuit symbol	Contact configuration	EU nomenclature	USA nomenclature
	Make contact (Normally Open)	N/O	SPST-NO DPST-NO nPST-NO (1)
—	Break contact (Normally Closed)	N/C	SPST-NC DPST-NC nPST-NC (1)
——	Changeover Contact	C/O	SPDT DPDT nPDT (1)

Utilization categories		
Category	Type of current	Applications
AC-1	~ single-phase ~ 3-phase	Resistive or slightly inductive loads.
AC-3	~ 3-phase	Starting and braking of squirrel cage motors; reversing direction of rotation only after stopping of motor.
AC-4	~ 3-phase	Starting of squirrel cage motors, inching, Plugging, reversing direction of rotation.
DC-1	---	Resistive or slightly inductive loads (2).
AC-14	~ single-phase	Control of electromagnetic loads (< 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
AC-15	~ single-phase	Control of electromagnetic loads (> 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
DC-13	---	Control of electromagnetic loads, auxiliary control relays, power contactors, magnetic solenoid valves and electromagnets.

Protection categories		
Category	Explanation	Condition
RT 0	Unenclosed relay	Relay not provided with a protective case.
RT I	Dust protected relay	Relay provided with a case which protects its mechanism from dust.
RT II	Flux-proof relay	Relay capable of being automatically soldered without allowing the migration of solder fluxes beyond the intended areas.
RT III	Wash-tight relay	Relay capable of being automatically soldered and then washed to remove flux residues without risk of ingress of flux or washing solvents.
RT IV	Sealed relay	Relay provided with a case which has no venting to the outside atmosphere.
RT V	Hermetically sealed relay	Sealed relay having an enhanced level of sealing.

(1) n = number of contacts.

(2) The switchable voltage can be doubled, for an equal current, by connecting two contacts in series.

Protection modules

Whenever an inductive load is de-energized (coil of a relay or of a contactor), an overvoltage appears at its terminals. This voltage peak can reach several thousand volts and a frequency of several MHz.

It is likely to disturb the operation of automation systems which contain electronic devices.

Protection modules are used to reduce the voltage peak on de-energization and they therefore limit the energy of interference signals to a level that will not disturb surrounding coils and electronic devices.

These modules are used to avoid:

- electromagnetic compatibility problems
- the deterioration of contact materials
- the destruction of insulation due to overvoltage
- the destruction of electronic components


Diode protection module (with or without LED)

■ Advantages


- accumulation of energy allowing current flow in the same direction
- absence of any voltage peaks at the coil terminals
- low cost

■ Considerations


- increase in relay drop-out time (up to 3 to 4 times the usual time)
- no polarity protection
- de-energization of the relay

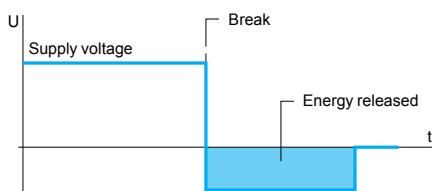

Coil voltage with diode protection module (--- only)

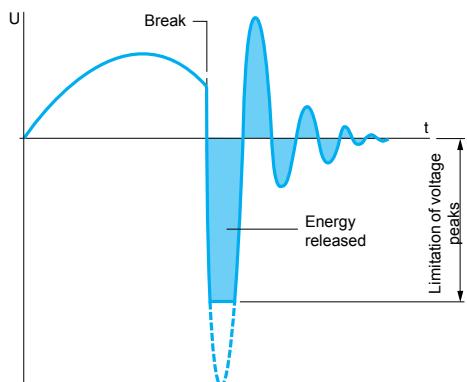

Coil voltage with varistor protection module (~ and ---)

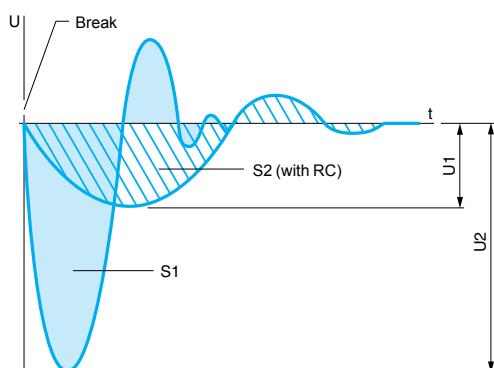

Coil voltage with RC circuit protection module (~ only)

S1 = S2 = Energy released

Protection module with varistor

■ Advantages

- can be used with ~ and --- supply
- voltage peak limited to about 2 Un
- little effect on relay drop-out time

■ Considerations

- no modification of coil's own oscillating frequency
- limitation of switching frequency

Protection module with RC circuit

■ Advantages

- coil oscillating frequency reduced to about 150 Hz
- voltage peak limited to 3 Un
- little effect on relay drop-out time

■ Considerations


- no protection for low voltages

Introduction

RSL slim interface relays offers compact size in a modular design: their slim width (6 mm) saves valuable space when mounting on a DIN rail at the back of an enclosure.

RSL relays are available in two versions:

- **Pre-assembled range:** a single catalog number for a standard relay mounted on a socket.
- The socket includes a built-in protection circuit (against transients and reverse polarity voltages) and an LED indicator as standard.
- Wire connection options: screw connectors and spring terminals.
- This pre-assembled solution covers a wide range of operating voltages from 12 to 230 V.
- **Individual relays and sockets:**
- The relay and the socket can be provided separately according to the requirements of the application.
- Simple maintenance: an **RSL** slim relay can be replaced without any need to disconnect the socket wiring.

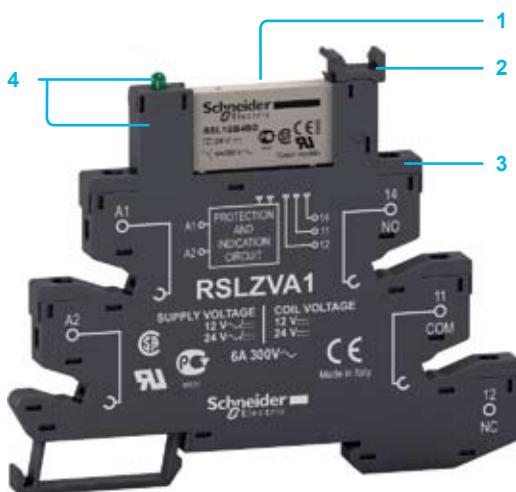

Description

RSL slim interface relays, pre-assembled

- 1 6 A standard relay with 1 C/O contact.
- 2 Retention lever for easy removal of the relay from its socket.
- 3 Sockets: wire connection by screw connector or spring terminals.
- 4 All sockets have a built-in protection circuit and an LED indicator.

RSL slim interface relay

- 1 Five flat, reinforced PCB pins.




Sockets for RSL slim interface relays

- 1 Five female contacts for the relay pins.
- 2 Retention lever which accepts optional ID tags.
- 3 Wire connection by screw connector or spring terminals.
- 4 Built-in protection circuit and LED indicator.
- 5 Locating slot for mounting on DIN rail.

General characteristics			
Conforming to standards		IEC 61810-1, UL 508, CSA C22-2 No. 14	
Product certifications		UL E173076, UL E172326, CSA 240278, CSA 247510, GOST	
Ambient air temperature around the device	Storage	°C	- 40... + 85
	Operation	°C	- 40... + 55
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		10 gn
	Not operating		5 gn
Degree of protection	Conforming to IEC/EN 60529		IP 40 (Relays) IP 20 (Sockets)
Shock resistance conforming to IEC/EN 60068-2-27	Opening		10 gn
	Closing		5 gn
Protection category			RT III
Mounting position			Any
Insulation characteristics			
Rated insulation voltage (Ui)		V	250 (IEC)
Rated impulse withstand voltage (Uimp)		kV	6
Dielectric strength (rms voltage)	Between coil and contact	~ V	4000
	Between contacts	~ V	1000



Contact characteristics

Relay type	RSL1AB***		
Number and type of contacts	1 C/O standard		
Contact materials	AgSnO ₂		
Conventional thermal current (I_{th})	For ambient temperature $\leq 55^{\circ}\text{C}$	A	6
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	N/C	A 6
		N/O	A 6
	Conforming to UL		A 6
Switching current	Minimum	mA	100
Switching voltage	Rated	$\sim \text{V}$	250
	Maximum	V	$\sim 400, \text{---} 300$
	Minimum	V	12
Nominal load (resistive)		A / $\sim \text{V}$	6 / 250 V (at 50mW)
Switching capacity	Maximum	\sim	VA 1500
		---	W 18...150 (depending on the voltage)
	Minimum		mW 120
Maximum operating rate	No-load		72 000
In operating cycles / hour	Under load		360
Mechanical durability	In millions of operating cycles		≥ 10
Electrical durability In millions of operating cycles	Resistive load		See curves below
	Inductive load		0.05 (N/O contact: ~ 250 V, 3 A, AC-15)

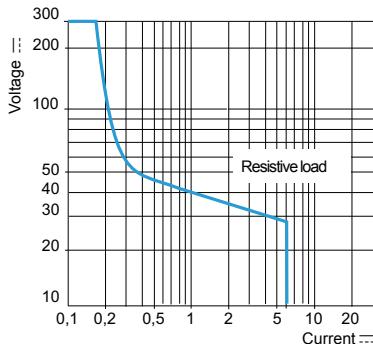Maximum switching capacity on --- load

Coil characteristics

Average consumption	---	W	0.17			
Drop-out voltage threshold	---	$\geq 0.05 U_c$				
Operating time (response time)	Between coil energization and making of the NO contact	---	ms 12 max			
	Between coil de-energization and making of the NC contact	---	ms 5 max			
Control circuit voltage U_c	V	12	24	48	60	
Relay control voltage codes		JD	BD	ED	ND	
DC supply	Average resistance at $23^{\circ}\text{C} \pm 10\%$	Ω	848	3390	10 600	20 500
Operating voltage limits	Min.	V	8.4	16.8	33.6	42
	Max.	V	16.8	33.6	67.2	84

Socket characteristics			
Socket type	RSLZV**	RSLZR**	
Relay types used	RSL1****	RSL1****	
Conforming to standards	IEC 61984, UL 508, CSA C22-2 No. 14		
Product certifications	UL, CSA, GOST		
Contact terminal arrangement	Separate	Separate	
Wire connection method	Screw connector	Spring terminals	
Width	mm	6.2	6.2
Electrical characteristics			
Conventional thermal current (I _{th})	A	6	
Maximum operating voltage	~ V	300	
Insulation characteristics			
Between adjacent output contacts	V _{rms}	2500	
Between input and output contacts	V _{rms}	2500	
Between contacts and DIN rail	V _{rms}	2500	
General characteristics			
Ambient air temperature around the device	Operation °C	- 40...+ 70 (-40 to +55 for U > 80 V)	
	Storage °C	- 40...+ 85	
Degree of protection	Conforming to IEC/EN 60529	IP 20	
Connection	Solid wire without 1 conductor cable end	mm ²	0.2...2.5
		AWG	24...14
	Flexible wire 1 conductor with cable end	mm ²	0.2...2.5
		AWG	24... 14
Screw size	mm	M 2.5	
Maximum tightening torque	Nm	0.5	10 N...40 N (0.2 ...1.5 mm ²)
Mounting		On 35 mm DIN rail	
Mounting on DIN rail		By plastic compression spring	
Terminal reference		IEC	
LED indicator		Yes (built-in)	
Added protection in circuit		Yes (built-in)	
Wire connection method		Screw connector	Spring terminal
			

Sockets operating voltage			
		Operating voltage	Tolerance
Socket type		V	V
RSLZVA1, RSLZRA1		.../~ 12	+ 20% / - 5%
		.../~ 24	+ 20% / - 10%
RSLZVA2, RSLZRA2		.../~ 48	+ 20% / - 10%
		.../~ 60	+ 20% / - 10%
RSLZVA3, RSLZRA3		.../~ 110	+ 15% / - 20%
		.../~ 230	+ 15% / - 20%
RSLZVA4, RSLZRA4		.../~ 12	-
		.../~ 24	-
RSLZVA5, RSLZRA5		.../~ 48	-
		.../~ 60	-
RSLZVA6, RSLZRA6		.../~ 110	-
		.../~ 230	-



RSL 1PV••

RSL 1PR••



RSL 1••••



RSL ZVA•

RSL ZRA•



RSL Z3

Slim interface relays, pre-assembled

Standard relays mounted on socket equipped with LED and protection circuit
Sold in lots of 10

1 C/O contact - Thermal current (I_{th}) 6A

Operating voltage (input voltage)	Socket type	Replacement Relay				
		Screw connector	Catalog Number	Weight	Spring terminal	Catalog Number
V				kg		
—/— 12	RSL1PVJU	0.031	RSL1PRJU	0.029	RSL1AB4JD	
—/— 24	RSL1PVBU	0.031	RSL1PRBU	0.029	RSL1AB4BD	
—/— 48	RSL1PVEU	0.031	RSL1PREU	0.029	RSL1AB4ED	
—/— 110	RSL1PVFU	0.031	RSL1PRFU	0.029	RSL1AB4ND	
—/— 230	RSL1PVPU	0.031	RSL1PRPU	0.029	RSL1AB4ND	

Slim interface relays for customer assembly: relay + socket

Relays with flat, reinforced pins (PCB type)

Sold in lots of 10

1 C/O contact - Thermal current (I_{th}) 6A

Control circuit voltage (relay coil voltage)	Standard	
	Catalog Number	Weight
V		kg
— 12	RSL1AB4JD	0.006
— 24	RSL1AB4BD	0.006
— 48	RSL1AB4ED	0.006
— 60	RSL1AB4ND	0.006

Sockets equipped with LED and protection circuit

Sold in lots of 10


Operating voltage (input voltage)	For use with relays	Socket type		Spring terminal	
		Screw connector	Catalog Number	Weight	Catalog Number
V				kg	
—/— 12 and —/— 24	RSL1AB4JD RSL1AB4BD	RSLZVA1	0.025	RSLZRA1	0.023
—/— 48 and —/— 60	RSL1AB4ED RSL1AB4ND	RSLZVA2	0.025	RSLZRA2	0.023
—/— 110	RSL1AB4ND	RSLZVA3	0.025	RSLZRA3	0.023
—/— 230	RSL1AB4ND	RSLZVA4	0.025	RSLZRA4	0.023

Accessories for sockets


Description	Compatibility	Catalog Number	Weight kg
Clip-in ID tags (2 sheets of 64 ID tags)	With all sockets	RSLZ5	0.001
Bus jumper (10 x 20-pole jumper)	With all sockets	RSLZ2	0.003
Butterfly isolator (10 isolators)	With all sockets	RSLZ3	0.001

Slim interface relays, pre-assembled

RSL1PV●● (screw connector)


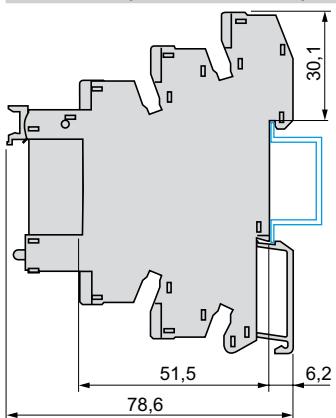


RSL1PR●● (spring terminals)

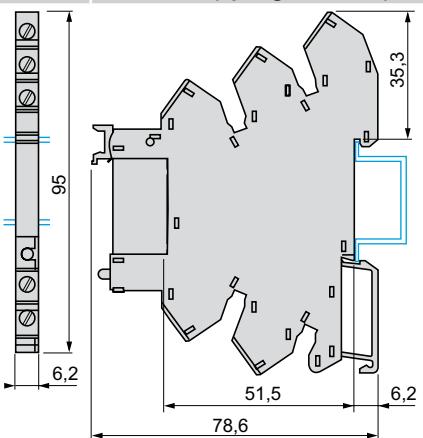


Relays

RSL1●●●● with flat, reinforced PCB pins




Sockets

RSLZV●● (screw connector)

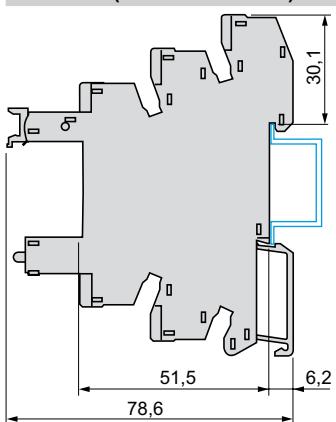


RSLZR●● (spring terminals)

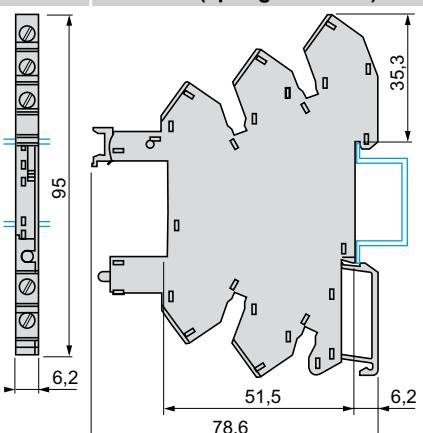


Socket connections

RSLZV●● (screw connector)

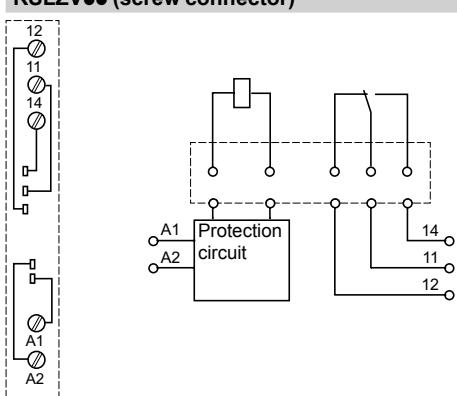


RSLZR●● (spring terminals)

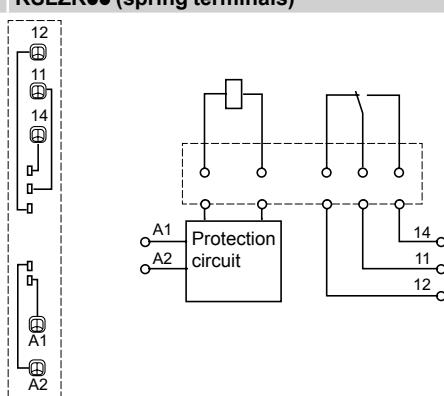

Example of RSL Z2 bus jumper mounting on sockets

Side view



(1) A1
(2) A2
(3) Bus jumper polarity A1
(4) Bus jumper polarity A2

Application	Plug-in relays	Miniature relays	
Number and type of contacts / conventional thermal current (Ith on N/O contact)	1 C/O / 16 A 1 C/O / 12 A 2 C/O / 8 A	2 C/O / 12 A 3 C/O / 10 A 4 C/O / 6 A 4 C/O / 3 A (low level)	
Control circuit voltage	~ —	24...240 V 6...110 V	
Type of pins	Flat, PCB type	Quick-connect	
Operational voltage	Up to ~ 400 V / — 300 V	Up to 250 V	
Durability (operating cycles)	Electrical, resistive load Mechanical, no-load	100 000 30 000 000	
Functions	LED Mechanical indicator Lockable test button Low level contacts	Yes (with protection modules) — — —	
Type reference	RSB	RXM	
Pages	20	24	
		 	
Conventional thermal current (Ith)	12 A (1)	10 A	12 A (2)
Contact terminal arrangements	Separate	Mixed	Separate
Connection	Box lug connectors	Screw clamp terminals or box lug connectors	Box lug connectors
Accessories	Protection modules Timer module Retention clip Socket ID tag Mounting adapters for U rail Mounting adapters with fixing lugs Bus jumper, 2-pole (Ith = 5 A)	Yes — Yes Yes — — —	Yes — Yes Yes (except RXZ E2M114) Yes Yes — Yes
Associated socket types	RSZE1S●●M	RXZE2M●●●	RXZE2S●●●
Pages	20	24	24

(1) When using relay RSB 1A160●● with socket RSZ E1S48M, terminals must be linked.
(2) Except for sockets RXZ E2S11●M: 10 A.

Universal relays



2 C/O / 10 A
3 C/O / 10 A
3 C/O / 3 A (low level)

24...230 V
12...220 V

Cylindrical

Up to 250 V

100 000
5 000 000

Yes (depending on version)
Yes
Yes
Yes (depending on version)

RUM

32



12 A

Mixed

Box lug connectors

Yes
Yes
Yes
Yes
—
—
—

RUZC•M

32

(3) 100 000 for RPM1 and RPM2; 60 000 for RPM3 and RPM4.



2 C/O / 10 A
3 C/O / 10 A

12...110 V

Quick-connect

Up to 250 V

100 000 (3)
10 000 000

Yes (depending on version)
Yes
Yes
—

Power relays



1 C/O / 15 A
2 C/O / 15 A
3 C/O / 15 A
4 C/O / 15 A

24...230 V
12...110 V

Quick-connect

Up to 250 V

100 000 (3)
10 000 000

Yes (depending on version)
Yes
Yes
—

RPM

42



16 A

Mixed

Screw clamp terminals


Yes
Yes (for 3 and 4-pole)
Yes (on socket RPZ F1)
Yes
Yes
Yes
—

RUZSF3M

32

RPZF•

42

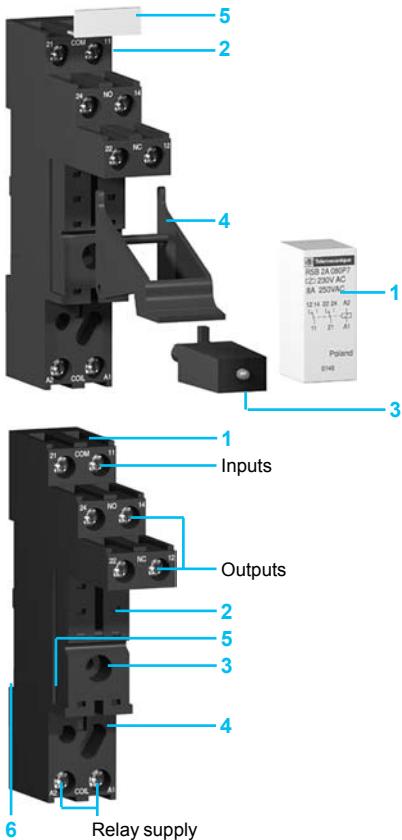

Introduction of the product range

The RSB interface relay range includes:

- 1 12 A relays with 1 C/O contact , 16 A relays with 1 C/O contact and 8 A relays with 2 C/O contacts.
- 2 Sockets with separate contact terminals.
- 3 Protection modules (diode, diode + LED, RC circuit or varistor + LED).
- 4 Plastic hold-down ejector clip for all sockets.
- 5 Clip-in ID tags for all sockets.

Socket description

Sockets with separate contact terminals (1)

- 1 Box lug connectors.
- 2 Five or eight female contacts for the relay pins.
- 3 Mounting hole for panel mounting.
- 4 Location for protection modules.
- 5 Locking components for plastic hold-down ejector clip.
- 6 Locating slot for mounting on DIN rail.

(1) The inputs and outputs are separated from the relay supply.

General characteristics

Conforming to standards	IEC/EN 61810-1, UL 508, CSA C22-2 n° 14		
Product certifications	cURus File E173076 CNN NRNT2; CSA File 215736 Class 321107; CE; RoHS compliant		
Ambient air temperature around the device	Storage	°C (F)	-40...+85 (-40 ... +185)
	Operation	°C (F)	--- -40...+85 (-40 ... +185), ~ -40...+70 (-40 ... +158)
Vibration resistance	Conforming to IEC/EN 60068-2-6		
Degree of protection	Conforming to IEC/EN 60529		
Shock resistance conforming to IEC/EN 60068-2-27	Opening	gn	5 gn
	Closing	gn	10 gn
Protection category	RT I		
Mounting position	Any		

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	400
Rated impulse withstand voltage (Uimp)		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	5000
	Between poles	~ V	2500
	Between contacts	~ V	1000

Contact characteristics

Relay type		RSB1A120••	RSB1A160••	RSB2A080••
Number and type of contacts		1 C/O	1 C/O	2 C/O
Contact materials		AgNi		
Conventional thermal current (Ith)	For ambient temperature $\leq 40^{\circ}\text{C}$	A	12	16
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC N.O. N.C.	A	12 6	16 8
Switching current	Minimum	mA	5	
Switching voltage	Maximum	V	~ 400 , ≤ 300	
	Minimum	V	5	
Nominal load (resistive)		A	12 / 250 \sim V	8 / 250 \sim V
		A	12 / 28 \leq V	8 / 28 \leq V
Switching capacity	Maximum	VA	3000	4000
	\leq	W	336	448
	Minimum	mW	300	224
Maximum operating rate in operating cycles/hour	No-load		72 000	
	Under load		600	

Introduction:
page 20

Characteristics:
page 20

Product selector:
page 22

Dimensions, Wiring diagrams:
page 23

Contact characteristics (continued)		
Relay type		
Mechanical durability	In millions of operating cycles	RSB 1A120●● ≥ 30
Electrical durability	Resistive load (p.f.)	12 A, 250 V~ (≥ 0.1)
In millions of op. cycles	Inductive load	See curves below
Electrical durability of contacts	Resistive load ~	Reduction coefficient for inductive load ~ (depending on power factor cos φ)
		Maximum switching capacity on resistive load
A RSB 2A080●● B RSB 1A160●● C RSB 1A120●●.	Inductive load durability = resistive load durability x reduction coefficient.	
Coil characteristics		
Average consumption		... 0.45 W, ~ 0.75 VA
Drop-out voltage threshold		≥ ... 0.1 Uc (10% of rated voltage), ≥ ~ 0.15 Uc (15% of rated voltage)
Operating time (response time)	Between coil energization and making of the NO contact	~ ms 12 ... ms 9
	Between coil de-energization and making of the NC contact	~ ms 10 ... ms 4
Control circuit voltage Uc	V	6 12 24 48 60 110 120 220 230 240
Relay control voltage codes		
d.c. supply	Average resistance at 20 °C ± 10%	RD JD BD ED ND FD - - - -
	Operating voltage limits	90 360 1440 5700 7500 25 200 - - - -
a.c. supply	Average resistance at 20 °C ± 15%	- - B7 E7 - - F7 M7 P7 U7
60 Hz	Operating voltage limits	4.8 9.6 19.2 38.4 48 88 - - - -
	Max.	6.6 13.2 26.4 52.8 66 121 - - - -
	Max. 50/60 Hz	- - 400 1550 - - 10 200 35 500 38 500 42 500
		- - 19.2 38.4 - - 96 176 184 192
		- - 20.4 40.8 - - 102 187 195.5 204
		- - 26.4 57.6 - - 144 264 276 288
Socket characteristics		
Socket type		RSZE1S35M RSZE1S48M
Relay types used		RSB1A120●● RSB2A080●●, RSB1A160●● (1)
Contact terminal arrangement		Separate
Wire connection method		Connector
Product certifications		CE
Product certifications		CURus File E172326 CCN SWIV2; CSA File 212916 Class 3211 07; CE; RoHS compliant
Electrical characteristics		
Conventional thermal current (Ith)	A	12
Maximum operating voltage	V~	300
Insulation characteristics		
Between adjacent output contacts	Vrms	2500
Between input and output contacts	Vrms	2500
Between contacts and DIN rail	Vrms	2500
General characteristics		
Ambient air temperature around the device	Operation	°C (F) -25...+85 (-13...+185)
	Storage	°C (F) -40...+85 (-40...+185)
Degree of protection	Conforming to IEC/EN 60529	IP 20
Connection box lug connector	Solid wire without cable end	0.5...2.5 mm² - AWG 20...AWG 14
	2 conductors	0.5...1.5 mm² - AWG 20...AWG 16
	Flexible wire with 1 conductor cable end	0.25...2.5 mm² - AWG 22...AWG 14
	2 conductors	0.25...1 mm² - AWG 22...AWG 17
Maximum tightening torque / Screw size	Nm	0.8 / M3 screw
Mounting		35 mm DIN rail / panel mount
Mounting on DIN rail		By plastic compression spring
Terminal referencing		IEC
Compatibility with the metal hold-down clip		Yes, plastic
Timer module		No
Protection module		All RZM ●●●
Clip-in ID tags		Available
Wire connection method	Box lug connector	

(1) When using the relay with socket RSZE1S48M, terminals must be linked. See wiring diagrams on page 23.



RSB 1A120JD + RZM 031FPD + RSZ E1S35M

Relays for standard applications

Control circuit voltage	Sold in lots of	Number and type of contacts - Thermal current (Ith)			
		1 C/O - 12 A	1 C/O - 16 A	2 C/O - 8 A	Weight kg
Catalog number (1)	Catalog number (1)	Catalog number (1)	Catalog number (1)	Catalog number (1)	
V					
--- 6	10	RSB1A120RD	RSB1A160RD	RSB2A080RD	0.014
--- 12	10	RSB1A120JD	RSB1A160JD	RSB2A080JD	0.014
--- 24	10	RSB1A120BD	RSB1A160BD	RSB2A080BD	0.014
--- 48	10	RSB1A120ED	RSB1A160ED	RSB2A080ED	0.014
--- 60	10	RSB1A120ND	RSB1A160ND	RSB2A080ND	0.014
--- 110	10	RSB1A120FD	RSB1A160FD	RSB2A080FD	0.014



RSB 1A160BD + RSZ E1S48M

~ 24	10	RSB1A120B7	RSB1A160B7	RSB2A080B7	0.014
~ 48	10	RSB1A120E7	RSB1A160E7	RSB2A080E7	0.014
~ 120	10	RSB1A120F7	RSB1A160F7	RSB2A080F7	0.014
~ 220	10	RSB1A120M7	RSB1A160M7	RSB2A080M7	0.014
~ 230	10	RSB1A120P7	RSB1A160P7	RSB2A080P7	0.014
~ 240	10	RSB1A120U7	RSB1A160U7	RSB2A080U7	0.014

Sockets 12 A, ~ 300 V


Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Separate	Box lug connectors	RSB1A120••	10	RSZE1S35M	0.060
		RSB1A160•• (2)	10	RSZE1S48M	0.050
		RSB2A080••			



RSB 2A080BD + RSZ E1S48M

Protection modules

Description	For use with	Voltage	Sold in lots of	Catalog number	Weight kg
		V			
Diode	All sockets	--- 6...230	10	RZM040W	0.003
RC circuit	All sockets	~ 24...60	10	RZM041BN7	0.010
		~ 110...240	10	RZM041FU7	0.010
Diode + green LED	All sockets	--- 6...24	10	RZM031RB	0.004
		--- 24...60	10	RZM031BN	0.004
		--- 110...230	10	RZM031FPD	0.004
Varistor + green LED	All sockets	--- or ~ 6...24	10	RZM021RB	0.005
		--- or ~ 24...60	10	RZM021BN	0.005
		--- or ~ 110...230	10	RZM021FP	0.005



RSZ R215

Accessories

Description	For use with	Sold in lots of	Catalog number	Weight kg
Plastic hold-down ejector clip	All sockets	10	RSZR215	0.002
ID tag	All sockets	10	RSZL300	0.001


(1) To order a relay complete with socket (**sold in lots of 20**): add suffix **S** to one of the following voltage codes **JD, BD, B7, P7 or F7**.
Example: **RSB2A080BD + RSZE1S48M** becomes **RSB2A080RBS**.

(2) When using the relay with socket RSZE1S48M, terminals must be linked. See wiring diagrams on page 23.


Dimensions (mm):

Interface relays

RSB1A120••

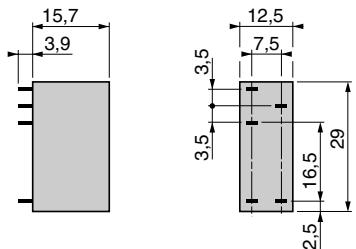


RSB2A080••, RSB1A160••




Sockets

RSZE1S35M

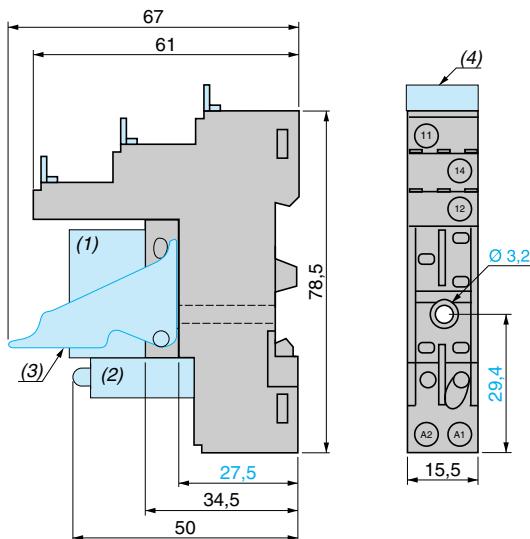

RSZE1S48M

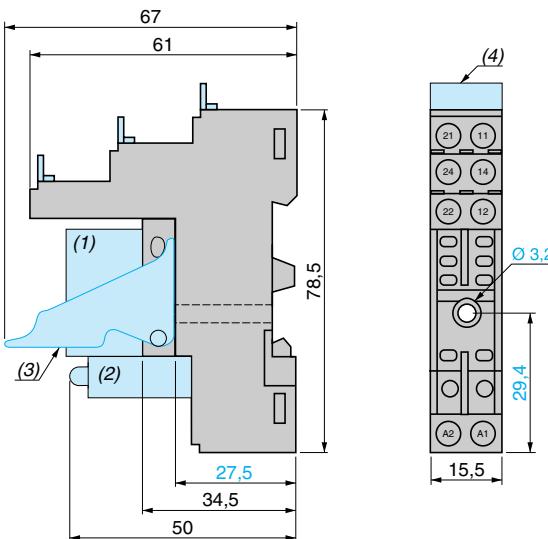




Wiring diagrams

Interface relays

RSB1A120••

RSB1A160••


RSB2A080••

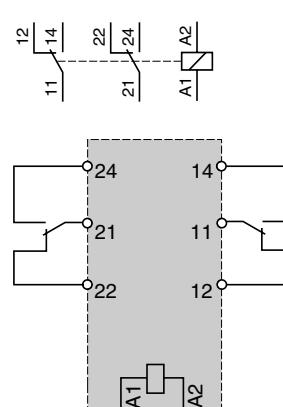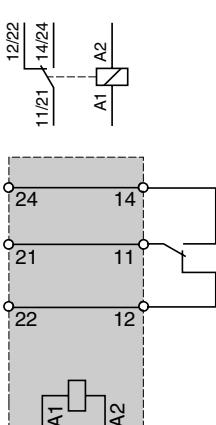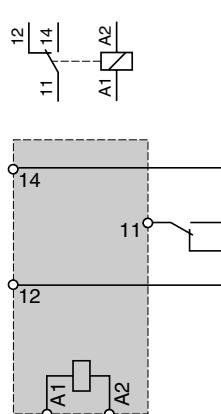


When using relay RSB 1A160•• with socket RSZ E1S48M
terminals 11 and 21, 14 and 24, 12 and 22 must be linked

Protection modules


RZM040W




RZM041•••




RZM031•••



RZM021•••



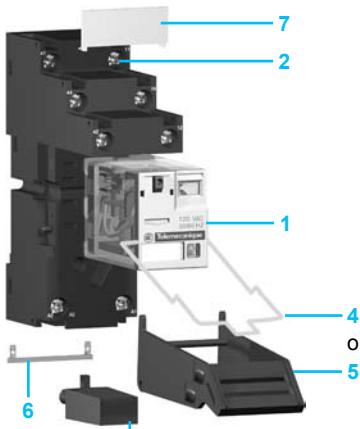



Introduction of the product range

The RXM miniature relay range includes:

- 1 12 A relays with 2 C/O contacts, 10 A relays with 3 C/O contacts, 6 A relays with 4 C/O contacts and 3 A "low level" relays with 4 C/O contacts. All these relays have the same dimensions.
- 2 Sockets with mixed or separate contact terminals.
- 3 Protection modules (diode, RC circuit or varistor).
- 4 Metal hold-down clip for all sockets.
- 5 Plastic hold-down ejector clip for all sockets.
- 6 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify wiring when creating a jumper between the coil terminals.
- 7 Clip-in ID tags for all the sockets except RXZE2M114.

Relay description

- 1 Spring return push-to-test button for checking contact operation (green: —, red: ~).
- 2 Mechanical "relay status" indicator.
- 3 Optional removable lock-down door enables continuous engagement of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 Bipolar LED (depending on version) indicating the relay status.
- 5 Removable ID tag for relay identification.
- 6 Four notches for DIN rail mounting adapter or panel mounting adapter with fixing lugs.
- 7 Eight, eleven or fourteen quick-connect pins.
- 8 Area by which the product can be easily gripped.
- 9 Mounting adapter enabling direct mounting of the relay on a panel.
- 10 Mounting adapter enabling direct mounting of the relay on a DIN rail.

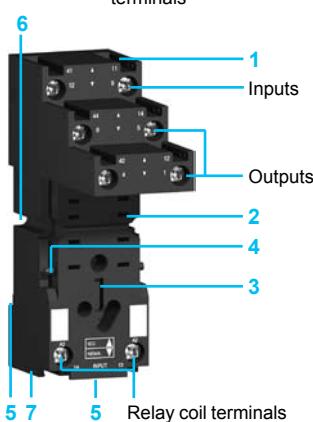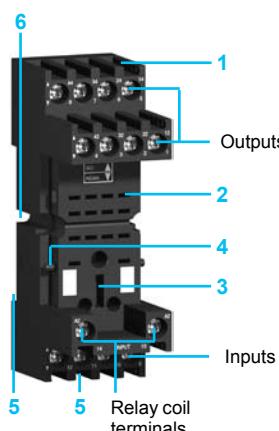

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals or box lug connector.
- 2 Fourteen female contacts for the relay pins.
- 3 Location for protection modules.
- 4 Locking components for plastic and metal hold-down clips.
- 5 Locating slot for mounting on DIN rail.
- 6 Two or four mounting holes for panel mounting.

Sockets with separate contact terminals (2)

- 1 Connection by screw connector.
- 2 Eight, eleven or fourteen female contacts for the relay pins.
- 3 Location for protection modules.
- 4 Locking components for plastic and metal hold-down clips.
- 5 Locating slot for mounting on DIN rail.
- 6 Two mounting holes for panel mounting.
- 7 Location for bus jumpers (see mounting on sockets on page 30).

(1) The inputs are mixed with the relay coil terminals, with the outputs being located on the opposite side of the socket.

(2) The inputs and outputs are separated from the relay coil terminals.

General characteristics

Conforming to standards				IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14
Product certifications				cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant
Ambient air temperature around the device	Storage	°C (F)	-40... +85 (-40... +185)	
	Operation	°C (F)	-40... +55 (-40... +131)	
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz ± 1 mm / 5g/5 cycles)	
	Not operating		5 gn (10...150 Hz ± 1 mm / 5g/5 cycles)	
Degree of protection	Conforming to IEC/EN 60529		IP 40	
Shock resistance conforming to IEC/EN 60068-2-27	Opening		15 gn	
	Closing		15 gn	
Protection category			RT I	
Mounting position			Any	

Insulation characteristics


Rated insulation voltage (Ui)	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uiimp)	kV	4 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V 1550
	Between poles	~ V 1550
	Between contacts	~ V 1500

Contact characteristics


Relay type		RXM2AB***	RXM3AB***	RXM4AB***	RXM4GB***
Number and type of contacts		2 C/O	3 C/O	4 C/O	4 C/O low level
Contact materials		AgNi			AgAu - bifurcated
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C	A	12	10	6
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	NO	12	10	6
		NC	6	5	3
	Conforming to UL		12	10	6
Switching current	Minimum	mA	10		3
Switching voltage	Maximum	V	~ / ... 250 (IEC)		
	Minimum	V	17		5
Nominal load (resistive)		A	12 / 250 ~ V	10 / 250 ~ V	6 / 250 ~ V
		A	12 / 28 ... V	10 / 28 ... V	6 / 28 ... V
Switching capacity	Maximum	~ VA	3000	2500	1500
	...	W	336	280	168
	Minimum	mW	170		84
					15
Maximum operating rate	No-load		18 000		
In operating cycles	Under load		1200		
Utilization coefficient			20 %		
Mechanical durability	In millions of operating cycles		10		
Electrical durability	Resistive load		0.1		
In millions of operating cycles	Inductive load		See curves below		

Electrical durability of contacts


Resistive load ~



Reduction coefficient for inductive load ~ (depending on power factor cos φ)



Maximum switching capacity on resistive load ...



A RXM2AB*** B RXM3AB*** C RXM4AB*** D RXM4GB***

Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics

Average consumption	~	VA	1.2									
	---	W	0.9									
Drop-out voltage threshold	~		≥ 0.15 Uc									
	---		≥ 0.1 Uc									
Operating time (response time)	Between coil energization and making of the NO contact	~	ms	20								
	---	ms	20									
	Between coil de-energization and making of the NC contact	~	ms	20								
	---	ms	20									
Control circuit voltage Uc	V	12	24	48	110	120	125	220	230	240		
Relay coil voltage codes		JD	BD	ED	FD	-	GD	MD	-	-		
d.c. supply	Average resistance at 20 °C ± 10%	Ω	160	650	2600	11 000	-	11 000	14 000	-		
	Operating voltage limits	Min.	V	9.6	19.2	38.4	88	-	100	176	-	
		Max.	V	13.2	26.4	52.8	121	-	138	242	-	
Relay coil voltage codes		-	B7	E7	F7	-	-	P7	U7			
a.c. supply	Average resistance at 20 °C ± 15%	Ω	-	180	770	-	4430	-	-	15 000	15 500	
	Operating voltage limits	Min.	V	-	19.2	38.4	-	96	-	-	184	192
		Max.	V	-	26.4	52.8	-	132	-	-	253	264

Socket characteristics

Socket type		RXZE2S108M	RXZE2S111M	RXZE2S114M	RXZE2M114M	RXZE2M114
Relay types used		RXM2•••••	RXM3•••••	RXM4•••••	RXM2••••• (1) RXM4•••••	RXM2••••• (1) RXM4•••••
Contact terminal arrangement		Separate		Mixed		
Wire connection method		Box lug connectors		Screw clamp terminals		
Product certifications		cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant				
Conforming to standards		IEC 61984, CE				

Electrical characteristics

Conventional thermal current (Ith)	A	12	10
Maximum operating voltage	V	250 (IEC)	

Insulation characteristics

Between adjacent output contacts	Vrms	2500
Between input and output contacts	Vrms	2500
Between contacts and DIN rail	Vrms	2500

General characteristics

Ambient air temperature	Operation	°C (F)	-40...+55 (-40...+131)	
	Storage	°C (F)	-40...+85 (-40...+185)	
Degree of protection	Conforming to IEC/EN 60529		IP 20	
Connection	Solid wire without cable end	1 conductor	0.5...2.5 mm ² - AWG 20...AWG 14	0.5...1.5 mm ² AWG 20...AWG 16
		2 conductors	0.5...1.5 mm ² - AWG 20...AWG 16	
	Flexible wire with cable end	1 conductor	0.25...2.5 mm ² - AWG 22...AWG 14	0.25...1 mm ² AWG 22...AWG 17
		2 conductors	0.25...1 mm ² - AWG 22...AWG 17	



Maximum tightening torque / Screw size	Nm	1 / M3 screw
Mounting		35 mm DIN rail / panel mount

Mounting on DIN rail		By red plastic clip	By metal compression spring	By red plastic clip

Terminal referencing		IEC, NEMA
Bus jumper (Ith: 5 A)		Yes

Compatibility with the plastic hold-down ejector clip		Yes
Compatibility with the metal hold-down clip		Yes

Protection module		All RXM040W, RXM041••, RXM021••
Clip-in ID tags		Yes

Wire connection method		Box lug connector	Screw clamp terminals
			

(1) When mounting relay RXM2••••• on socket RXZE2M•••••, the thermal current must not exceed 10 A.



RXM•AB1F7



RXM•AB2F7



RXM4GB1F7



RXM4GB2F7

Miniature relays without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			
	2 C/O - 12 A		3 C/O - 10 A	
V	Catalog number	Weight	Catalog number	Weight
... 12	RXM2AB1JD	0.037	RXM3AB1JD	0.037
... 24	RXM2AB1BD	0.037	RXM3AB1BD	0.037
... 48	RXM2AB1ED	0.037	RXM3AB1ED	0.037
... 110	RXM2AB1FD	0.037	RXM3AB1FD	0.037
... 220	-	-	-	-
~ 24	RXM2AB1B7	0.037	RXM3AB1B7	0.037
~ 48	RXM2AB1E7	0.037	RXM3AB1E7	0.037
~ 120	RXM2AB1F7	0.037	RXM3AB1F7	0.037
~ 230	RXM2AB1P7	0.037	RXM3AB1P7	0.037
~ 240	-	-	-	-
				RXM4AB1U7 0.037

Miniature relays with LED (sold in lots of 10)

... 12	RXM2AB2JD	0.037	RXM3AB2JD	0.037	RXM4AB2JD	0.037
... 24	RXM2AB2BD	0.037	RXM3AB2BD	0.037	RXM4AB2BD	0.037
... 48	RXM2AB2ED	0.037	RXM3AB2ED	0.037	RXM4AB2ED	0.037
... 110	RXM2AB2FD	0.037	RXM3AB2FD	0.037	RXM4AB2FD	0.037
... 125	-	-	-	-	RXM4AB2GD	0.037
~ 24	RXM2AB2B7	0.037	RXM3AB2B7	0.037	RXM4AB2B7	0.037
~ 48	RXM2AB2E7	0.037	RXM3AB2E7	0.037	RXM4AB2E7	0.037
~ 120	RXM2AB2F7	0.037	RXM3AB2F7	0.037	RXM4AB2F7	0.037
~ 230	RXM2AB2P7	0.037	RXM3AB2P7	0.037	RXM4AB2P7	0.037

Miniature relays with low level contacts, without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts Thermal current (Ith)		
	4 C/O - 3 A	Catalog number	Weight
V	kg		
... 12		RXM4GB1JD	0.037
... 24		RXM4GB1BD	0.037
... 48		RXM4GB1ED	0.037
... 110		RXM4GB1FD	0.037
~ 24		RXM4GB1B7	0.037
~ 48		RXM4GB1E7	0.037
~ 120		RXM4GB1F7	0.037
~ 230		RXM4GB1P7	0.037

Miniature relays with low level contacts, with LED (sold in lots of 10)

... 12	RXM4GB2JD	0.037
... 24	RXM4GB2BD	0.037
... 48	RXM4GB2ED	0.037
... 110	RXM4GB2FD	0.037
~ 24	RXM4GB2B7	0.037
~ 48	RXM4GB2E7	0.037
~ 120	RXM4GB2F7	0.037
~ 230	RXM4GB2P7	0.037
~ 240	RXM4GB2U7	0.037

Zelio® Plug-In Relays

RXM miniature relays



RXZE2M114M
+
Relais RXM4AB2F7



RXZE2S114M
+
Relais RXM4AB2F7



RXM041●●7



REXL4●●



RXZ400

Miniature relays without LED (sold in lots of 100)		Number and type of contacts - Thermal current (Ith) 2 C/O - 12 A		4 C/O - 6 A	
Control circuit voltage	Catalog number	Weight	Catalog number	Weight	
V					kg
— 12	—	—	RXM4AB1JDTQ	0.036	
— 24	RXM2AB1BDTQ	0.037	RXM4AB1BDTQ	0.036	
— 48	—	—	RXM4AB1EDTQ	0.036	
— 110	—	—	RXM4AB1FDTQ	0.036	
— 220	—	—	RXM4AB1MDTQ	0.036	
~ 24	RXM2AB1B7TQ	0.037	RXM4AB1B7TQ	0.036	
~ 48	—	—	RXM4AB1E7TQ	0.036	
~ 120	RXM2AB1F7TQ	0.037	RXM4AB1F7TQ	0.036	
~ 230	RXM2AB1P7TQ	0.037	RXM4AB1P7TQ	0.036	
Miniature relays with LED (sold in lots of 100)					
— 24	—	—	RXM4AB2BDTQ	0.036	
~ 24	RXM2AB2B7TQ	0.037	RXM4AB2B7TQ	0.036	
~ 230	RXM2AB2P7TQ	0.037	RXM4AB2P7TQ	0.036	
Sockets					
Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Screw clamp terminals	RXM2●●●● (3) RXM4●●●●	10	RXZE2M114 (1)	0.048
	Box lug connector	RXM2●●●● (3) RXM4●●●●	10	RXZE2M114M (1)	0.056
Separate	Box lug connector	RXM2●●●●	10	RXZE2S108M (2)	0.058
		RXM3●●●●	10	RXZE2S111M (7)	0.066
		RXM4●●●●	10	RXZE2S114M (1)	0.070
Protection modules					
Description	Voltage	For use with	Sold in lots of	Catalog number	Weight kg
V					kg
Diode	— 6...250	All sockets	20	RXM040W	0.003
RC circuit	~ 24...60	All sockets	20	RXM041BN7	0.010
	~ 110...240	All sockets	20	RXM041FU7	0.010
Varistor	~— 6...24	All sockets	20	RXM021RB	0.030
	~— 24...60	All sockets	20	RXM021BN	0.030
	~— 110...240	All sockets	20	RXM021FP	0.030
Timing relays					
Description	For use with			Catalog number	Weight kg
2 or 4 timed C/O contacts (function A)	Sockets RXZE●●●●●			REXL2●● (4) REXL4●● (4)	— —
Accessories					
Description	For use with	Sold in lots of	Catalog number	Weight kg	
Metal hold-down clip	All sockets	10	RXZ400	0.001	
Plastic hold-down ejector clip	All sockets	10	RXZR335	0.005	
Bus jumper 2-pole (Ith: 5 A)	All sockets with separate contacts	10	RXZS2	0.005	
Mounting adapter for DIN rails (5)	All relays	10	RXZE2DA	0.004	
Mounting adapter with fixing lugs for panel	All relays	10	RXZE2FA	0.002	
Clip-in ID tags	All relays (sheet of 108 ID tags)	10	RXZL520	0.080	
	All sockets except RXZ E2M114	10	RXZL420	0.001	

(1) Thermal current Ith: 10 A

(2) Thermal current Ith: 12 A

(3) When mounting relay RXM2●●●●● on socket RXZE2M●●●●●, the thermal current must not exceed 10 A.



(4) Please consult the "Zelio Time - timing relays" catalog.

(5) Test button becomes inaccessible.

Dimensions (mm):**Miniature relays**

RXM•••••

Common view





RXM2


Pin side view

RXM3


RXM4

**Sockets**

RXZE2M114

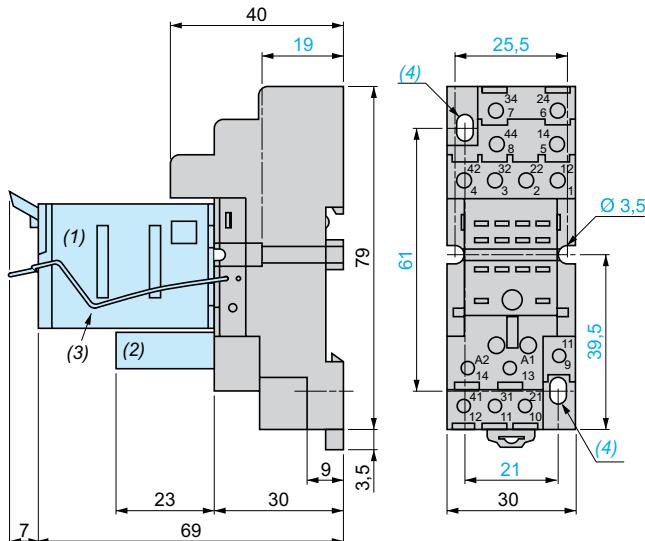

RXZE2M114M



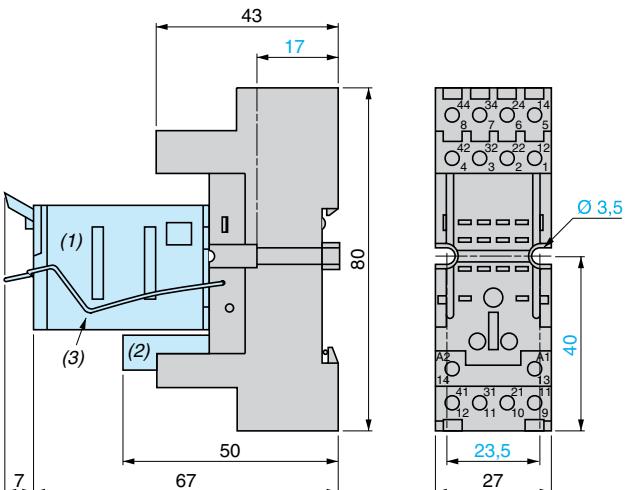


Common side view

RXZE2S108M

RXZE2S111M

RXZE2S114M

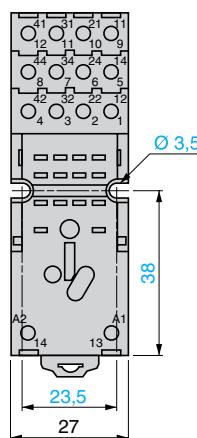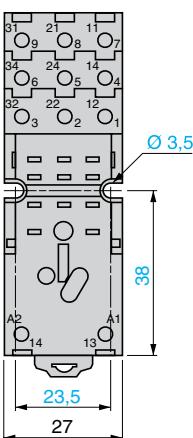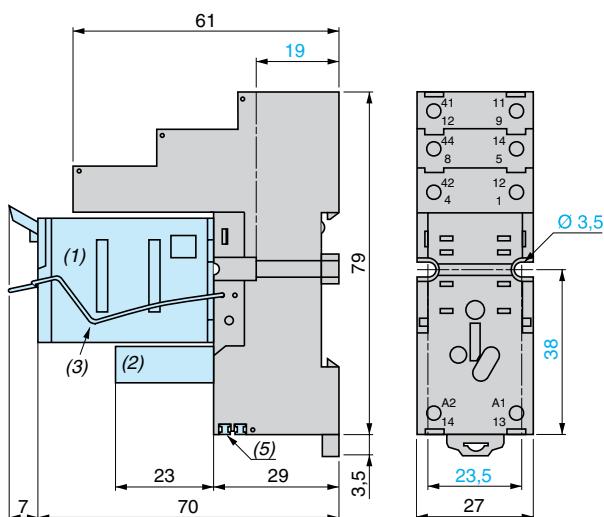

(1) Relay

(2) Protection module

(3) Metal hold-down clip

(4) 2 elongated holes Ø 3.5 x 6.5

(5) 2 bus jumpers




Dimensions (mm):

Plastic hold-down clip and clip-in ID tags

RXZR335

RXL420


Mounting on all sockets (1)

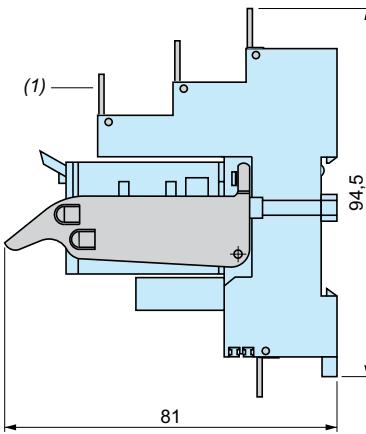

(1) Clip-in ID tags for all sockets except
RXZE2M114


Bus jumper

RXZS2




Mounting on sockets with separate contacts
(view from below)

Example of bus jumper mounting on sockets

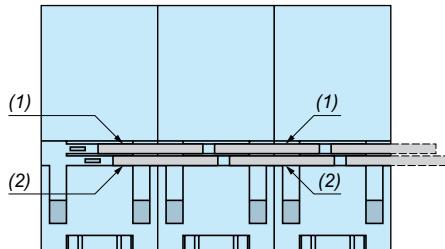


Metal hold-down clip

RXZ400




(1) 2 bus jumpers (polarity A2)
(2) 2 bus jumpers (polarity A1)

Mounting adapter for DIN rails (1)
RXZE2DA

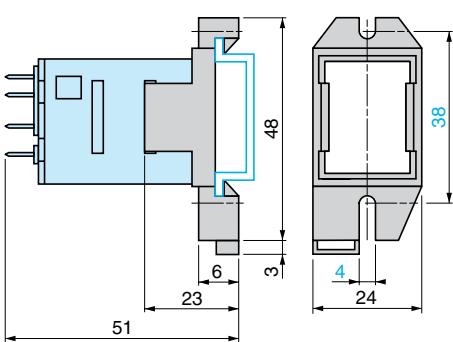

Mounting adapter for panel
RXZE2FA

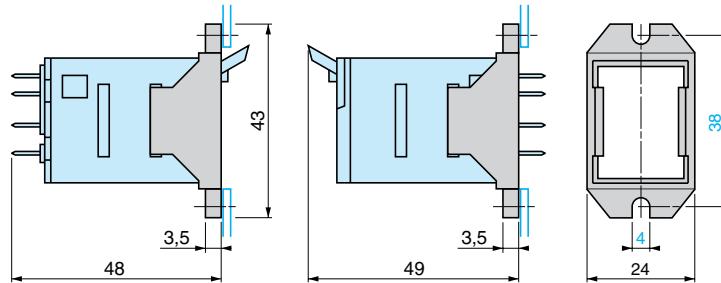


(1) Test button becomes inaccessible


Internal connections

Miniature relays





RXM2•••••



RXM3•••••




RXM4•••••




Symbols shown in blue correspond to Nema marking.

Sockets

RXZE2M114

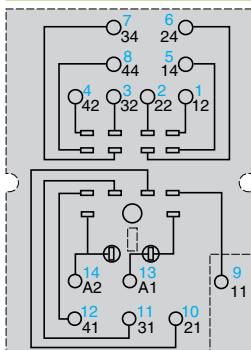


RXZE2M114M

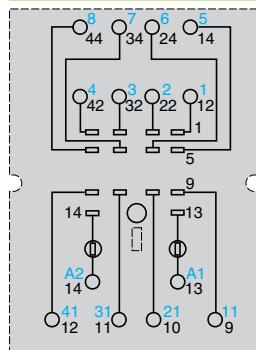


Symbols shown in blue correspond to Nema marking.


RXZE2S108M



RXZE2S111M




RXZE2S114M




Symbols shown in blue correspond to Nema marking.

Protection modules


RXM040W




RXM041•••



RXM021•••



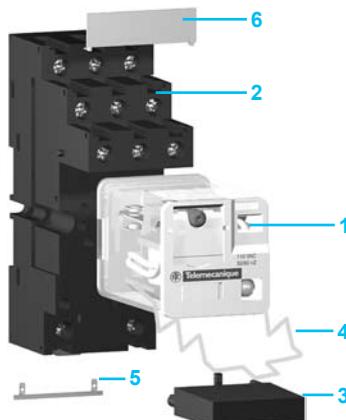


Introduction of the product range

The RUM universal relay range includes:

- 1 10 A relays with 2 and 3 C/O contacts, with cylindrical or quick-connect terminals, and 3 A low level relays with 3 C/O contacts, with cylindrical pins. All RUM relays have the same dimensions.
- 2 Sockets with mixed or separate contact terminals.
- 3 Protection modules (diode, RC circuit or varistor) or 1 timer module.
- 4 Metal hold-down clip for all sockets.
- 5 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify wiring when creating a jumper between the coil terminals.
- 6 Clip-in ID tags for the sockets.

Relay description


- 1 Spring return push-to-test button for checking contact operation (green: \equiv , red: \sim).
- 2 Mechanical "relay status" indicator.
- 3 Optional removable lock-down door enables continuous engagement of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 Bipolar LED (depending on version) indicating the relay status.
- 5 Removable ID tag for relay identification.
- 6 Area by which the product can be easily gripped.
- 7 Eight or eleven cylindrical pins.
- 8 Eight or eleven quick-connect pins

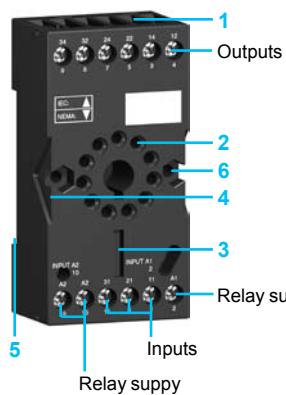

Socket description

Sockets with mixed contact terminals (1)

- 1 Box lug connectors.
- 2 Eight or eleven female contacts for the relay cylindrical pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal hold-down clip.
- 5 Locating slot for mounting on DIN rail.
- 6 Two mounting holes for panel mounting.

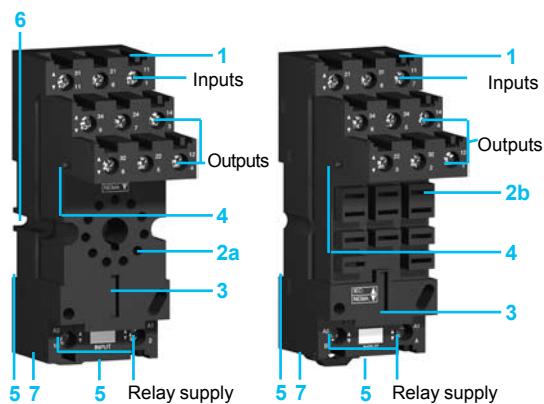

Sockets with separate contact terminals (2)

- 1 Box lug connectors.
- 2 a Eight or eleven female contacts for the relay cylindrical pins.
- 2 b Eleven female contacts for the relay flat pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal hold-down clip.
- 5 Locating slot for mounting on DIN rail.
- 6 Two mounting holes for panel mounting.
- 7 Location for bus jumpers (see mounting on sockets on page 38).

(1) The inputs are mixed with the relay coil terminals, with the outputs being located on the opposite side of the socket.

(2) The inputs and outputs are separated from the relay coil terminals.

General characteristics

Conforming to standards				IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14
Product certifications				cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant
Ambient air temperature around the device	Storage	°C (F)	- 40... + 85 (-40... +185)	
	Operation	°C (F)	- 40... + 55 (-40... +131)	
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz ± 1 mm / 5g/5 cycles)	
	Not operating		4 gn (10...150 Hz ± 1 mm / 5g/5 cycles)	
Degree of protection	Conforming to IEC/EN 60529		IP 40	
Shock resistance conforming to IEC/EN 60068-2-27	Opening		10 gn	
	Closing		10 gn	
Protection category			RT I	
Mounting position			Any	

Insulation characteristics


Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)	
Rated impulse withstand voltage (Uimp)		kV	4 (1.2/50 µs)	
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550	
	Between poles	~ V	1550	
	Between contacts	~ V	1500	

Contact characteristics


Relay type		RUMF2***	RUMF3***	RUMC2***	RUMC3A**	RUMC3G**
Number and type of contacts		2 C/O	3 C/O	2 C/O	3 C/O	3 C/O low level
Contact materials	.	AgNi				AgAu
Conventional thermal current (Ith)	For ambient temperature ≤ 55°C	A	10			3
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	NO	A	10		2
		NC	A	5		1
	Conforming to UL		A	16 / ~ 277 V 12 / --- 28 V		3
Switching current	Minimum	mA	10			3
Switching voltage	Maximum	V	~ / --- 250 (IEC)			
	Minimum	V	17			5
Nominal load (resistive)		A	10 / 250 ~ V			3 / 250 ~ V
		A	10 / 28 --- V			3 / 28 --- V
Switching capacity	Maximum	~	VA	2500		750
		---	W	280		84
	Minimum	mW		170		15
Maximum operating rate	No-load			18 000		
In operating cycles/hour	Under load			1200		
Utilization coefficient				20 %		
Mechanical durability	In millions of operating cycles			5		
Electrical durability	Resistive load			0.1		
In millions of operating cycles	Inductive load			See curves below		

Electrical durability of contacts


Resistive load ~



Reduction coefficient for inductive load ~ (depending on power factor cos φ)



Maximum switching capacity on resistive load ---



A RUMF***** , RUMC2*** , RUMC3A***

B RUMC3G***

Inductive load durability = resistive load durability x reduction coefficient.

Coil characteristics

Average consumption	~	VA	2...3								
	---	W	1.4								
Drop-out voltage threshold	~		≥ 0.15 Uc								
	---		≥ 0.1 Uc								
Operating time (response time)	Between coil energization and making of the NO contact	~	ms 20								
	---	ms	20								
	Between coil de-energization and making of the NC contact	~	ms 20								
	---	ms	20								
Control circuit voltage Uc	V	12	24	48	60	110	120	125	220	230	
Relay coil voltage codes		JD	BD	ED	ND	FD	-	GD	MD	-	
d.c. supply	Average resistance at 20 °C ± 10%	Ω	120	470	1800	2790	10 000	-	10 000	3700	
	Operating voltage limits	Min.	V	9.6	19.2	38.4	48	88	-	100	176
		Max.	V	13.2	26.4	52.8	66	121	-	137.5	242
Relay control voltage codes		-	B7	E7	-	-	F7	-	-	P7	
a.c. supply	Average resistance at 20 °C ± 15%	Ω	-	72	290	-	-	1700	-	-	7200
	Operating voltage limits	Min.	V	-	19.2	38.4	-	-	96	-	184
		Max.	V	-	26.4	52.8	-	-	132	-	253

Socket characteristics

Socket type		RUZC2M	RUZC3M	RUZSC2M	RUZSC3M	RUZSF3M
Relay types used		RUMC2*****	RUMC3*****	RUMC2*****	RUMC3*****	RUMF*****
Contact terminal arrangement		Mixed		Separate		
Wire connection method		Connector				
Product certifications		cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant				
Conforming to standards		IEC 61984, CE				

Electrical characteristics

Conventional thermal current (Ith)	A	10	12
Maximum operating voltage	V	250 (IEC)	

Insulation characteristics

Between adjacent output contacts	Vrms	2500
Between input and output contacts	Vrms	2500
Between contacts and DIN rail	Vrms	2500

General characteristics

Ambient air temperature around the device	Operation	°C (F)	-40...+55 (-40...+131)
	Storage	°C (F)	-40...+85 (-40...+185)
Degree of protection	Conforming to IEC/EN 60529		IP 20
Connection	Solid wire without cable end	1 conductor 2 conductors	0.5...2.5 mm ² - AWG 20...AWG 14 0.5...1.5 mm ² - AWG 20...AWG 16
	Flexible wire with cable end	1 conductor 2 conductors	0.25...2.5 mm ² - AWG 22...AWG 14 0.25...1 mm ² - AWG 22...AWG 17
Maximum tightening torque / Screw size		Nm	1 / M3.3 screw
Mounting			35 mm DIN rail / panel
Mounting on DIN rail			By red plastic clip
Terminal referencing			IEC, NEMA
Bus jumper (Ith: 5 A)		No	Yes
Compatibility with the metal hold-down clip		Yes	
Timer module		Yes	
Protection module		All RUW24***	
Clip-in ID tags		No	Yes
Wire connection method	Box lug connector		



RUM••AB1F7

Product selection						
Relays for standard applications, without LED (sold in lots of 10)						
Pins	Control circuit voltage	Number and type of contacts - Thermal current (Ith)				
		2 C/O - 10 A	Catalog number	Weight	3 C/O - 10 A	Catalog number
	V			kg		kg
Cylindrical	... 12	RUMC2AB1JD	0.085	RUMC3AB1JD	0.088	
	... 24	RUMC2AB1BD	0.085	RUMC3AB1BD	0.088	
	... 48	RUMC2AB1ED	0.085	RUMC3AB1ED	0.088	
	... 60	-	-	RUMC3AB1ND	0.088	
	... 110	RUMC2AB1FD	0.085	RUMC3AB1FD	0.088	
	... 125	-	-	RUMC3AB1GD	0.088	
	... 220	-	-	RUMC3AB1MD	0.088	
	~ 24	RUMC2AB1B7	0.085	RUMC3AB1B7	0.088	
Flat (quick-connect)	~ 48	RUMC2AB1E7	0.085	RUMC3AB1E7	0.088	
	~ 120	RUMC2AB1F7	0.085	RUMC3AB1F7	0.088	
	~ 230	RUMC2AB1P7	0.085	RUMC3AB1P7	0.088	
	... 12	RUMF2AB1JD	0.080	RUMF3AB1JD	0.082	
	... 24	RUMF2AB1BD	0.080	RUMF3AB1BD	0.082	
	... 48	RUMF2AB1ED	0.080	RUMF3AB1ED	0.082	
	... 110	RUMF2AB1FD	0.080	RUMF3AB1FD	0.082	
	~ 24	RUMF2AB1B7	0.080	RUMF3AB1B7	0.082	
Cylindrical	~ 48	RUMF2AB1E7	0.080	RUMF3AB1E7	0.082	
	~ 120	RUMF2AB1F7	0.080	RUMF3AB1F7	0.082	
	~ 230	RUMF2AB1P7	0.080	RUMF3AB1P7	0.082	
	... 12	RUMC2AB2JD	0.085	RUMC3AB2JD	0.088	
	... 24	RUMC2AB2BD	0.085	RUMC3AB2BD	0.088	
	... 48	RUMC2AB2ED	0.085	RUMC3AB2ED	0.088	
	... 60	-	-	RUMC3AB2ND	0.088	
	... 110	RUMC2AB2FD	0.085	RUMC3AB2FD	0.088	
Flat (quick-connect)	... 125	-	-	RUMC3AB2GD	0.088	
	~ 24	RUMC2AB2B7	0.085	RUMC3AB2B7	0.088	
	~ 48	RUMC2AB2E7	0.085	RUMC3AB2E7	0.088	
	~ 120	RUMC2AB2F7	0.085	RUMC3AB2F7	0.088	
	~ 230	RUMC2AB2P7	0.085	RUMC3AB2P7	0.088	
	... 12	RUMF2AB2JD	0.084	RUMF3AB2JD	0.082	
	... 24	RUMF2AB2BD	0.084	RUMF3AB2BD	0.082	
	... 48	RUMF2AB2ED	0.084	RUMF3AB2ED	0.082	
Flat (quick-connect)	... 110	RUMF2AB2FD	0.084	RUMF3AB2FD	0.082	
	~ 24	RUMF2AB2B7	0.084	RUMF3AB2B7	0.082	
	~ 48	RUMF2AB2E7	0.084	RUMF3AB2E7	0.082	
	~ 120	RUMF2AB2F7	0.084	RUMF3AB2F7	0.082	
	~ 230	RUMF2AB2P7	0.084	RUMF3AB2P7	0.082	
Relays with low level contacts, with LED (sold in lots of 10)						
Pins	Control circuit voltage	Number and type of contacts Thermal current (Ith)				
	V	3 C/O - 3 A	Catalog number	Weight		
Cylindrical	... 24		RUMC3GB2BD	0.086		
	... 48		RUMC3GB2ED	0.086		
	~ 24		RUMC3GB2B7	0.086		
	~ 48		RUMC3GB2E7	0.086		
	~ 120		RUMC3GB2F7	0.086		
	~ 230		RUMC3GB2P7	0.086		



RUM••AB2F7



RUZC3M + relais RUMC3•••••



RUW241P7



RUW101MW



RUZC200



RUZS2

Product selection (continued)

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Box lug connector	RUMC2•••••	10	RUZC2M	0.054
		RUMC3•••••	10	RUZC3M	0.054
Separate	Box lug connector	RUMC2•••••	10	RUZSC2M	0.095
		RUMC3•••••	10	RUZSC3M	0.100
		RUMF2•••••	10	RUZSF3M	0.095
		RUMF3•••••			

Protection modules

Description	For use with	Voltage	Sold in lots of	Catalog number	Weight kg
Diode	All sockets	— 6...250	10	RUW240BD	0.004
RC circuit	All sockets	~ 110...240	10	RUW241P7	0.004
Varistor	All sockets	~ / — 24	10	RUW242B7	0.004
		~ / — 240	10	RUW242P7	0.004

Timer module

Description	For use with	Voltage	Catalog number	Weight kg
Multifunction	All sockets	~ / — 24... 240	RUW101MW	0.020











Timing relays

Description	For use with	Catalog number	Weight kg
2 timed C/O contacts (single-function or multifunction)	On sockets RUZ C•M	RE48A •• (1)	—

Accessories

Description	For use with	Sold in lots of	Catalog number	Weight kg
Metal hold-down clip	All sockets	10	RUZC200	0.001
Bus jumper 2-pole (Ith : 5 A)	All sockets with separate contacts	10	RUZS2	0.005
Clip-in ID tags	All relays (sheet of 108 ID tags)	10	RXZL520	0.080
	All sockets with separate contacts	10	RUZL420	0.001

(1) Please consult the "Zelio Time timing relays" catalog.

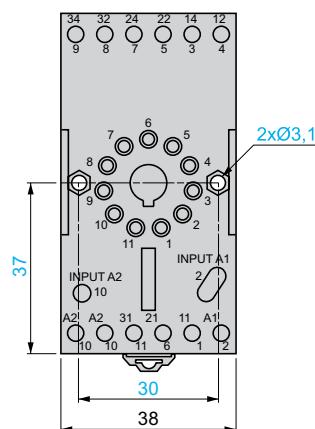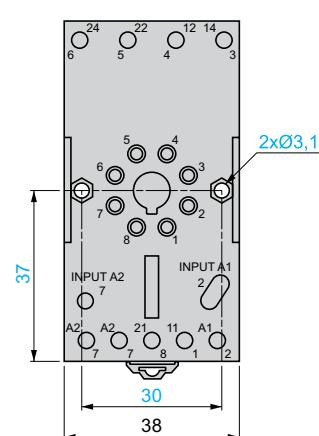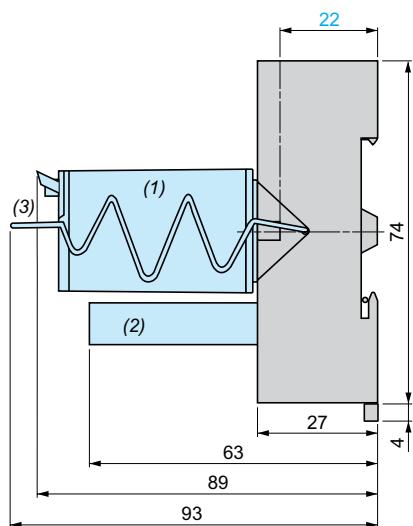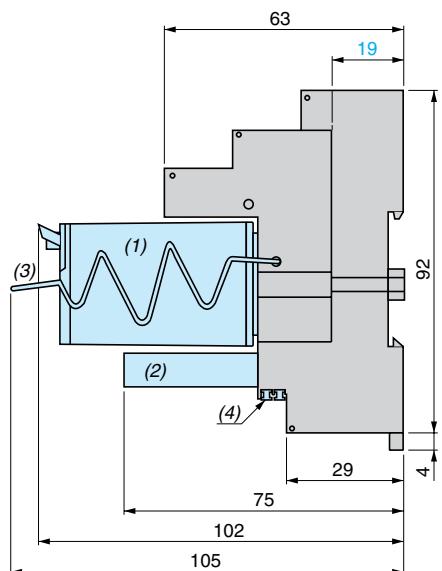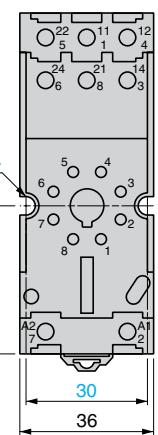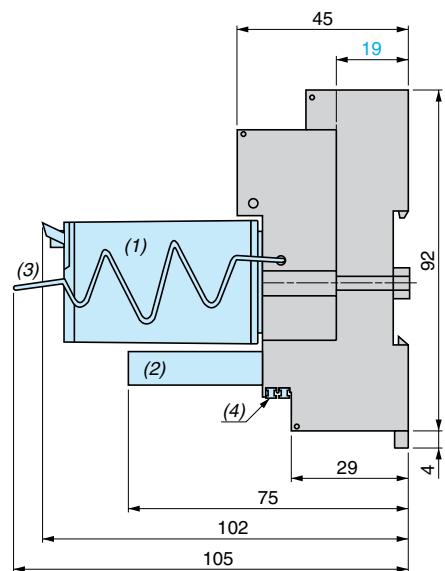Dimensions (mm):**Universal relays****RUMC••****RUMF••****Sockets****Common side view****RUZC2M****RUZC3M****RUZSC2M****RUZSC3M**

(1) Relays


(2) Protection module

(3) Retention clip

(4) 2 bus jumpers

Dimensions (mm):**Sockets (continued)**

RUZSF3M

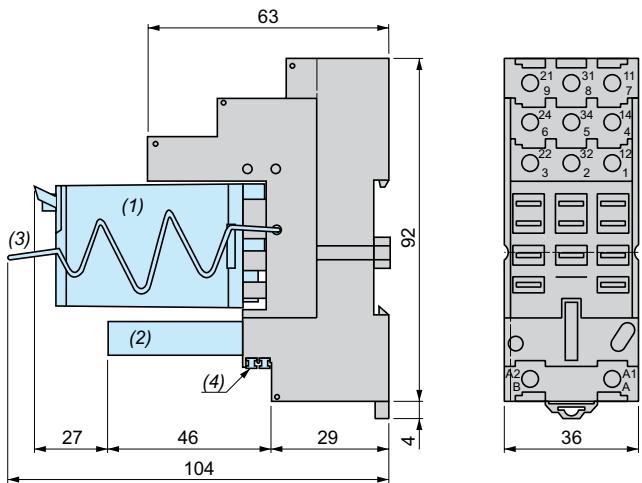

(1) Relays



(2) Protection module

(3) Retention clip


(4) 2 bus jumpers

Metal hold-down clip and plastic ID tags



RUZC200

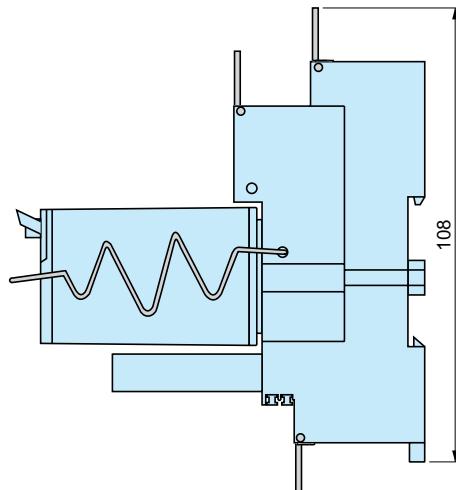Mounting

RUZL420

**Bus jumper**

RUZS2

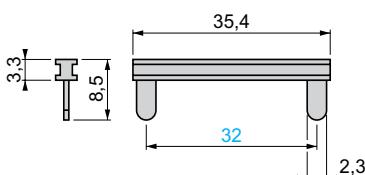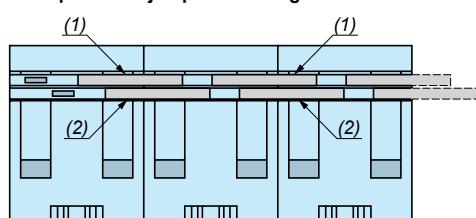
**Mounting on sockets with separate contacts (view from below)****Example of bus jumper mounting on sockets**

(1) 2 bus jumpers (polarity A2)
 (2) 2 bus jumpers (polarity A1)


Wiring diagrams

Universal relays


RUM•2AB•••




RUMC3•••••




RUMF3AB•••




RUMC2AB•••




RUMF2AB•••



RUMC3•••••




RUMF3AB•••




Symbols shown in blue correspond to Nema marking.

Sockets


RUZC2M




RUZC3M



RUZSC2M




RUZSC3M







Symbols shown in blue correspond to Nema marking.

RUZSF3M



Symbols shown in blue correspond to Nema marking.

Wiring diagrams (continued)**Protection modules****RUW240BD****RUW241P7****RUW242●●**

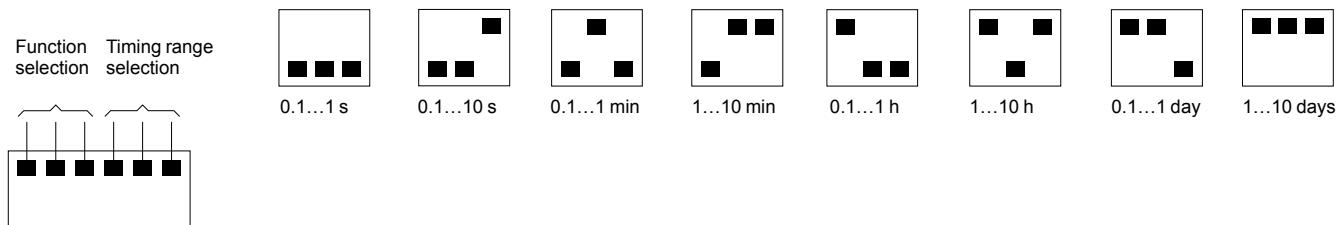Multifunction timer module RUW101MW**Programming****Timing range selection****Function selection**

Selection	Function	Control	Function diagram	Control scheme
	On-delay Timer E	Series control		
	Monostable with maintained control Wu	Series control		
	Flashing relay, starting On-delay phase Bi	Series control		
	Flashing relay, starting Off-delay phase Bp	Series control		
	Off-delay timer R	Control by external contact (S)		
	Monostable with pulse control Ws	Control by external contact (S)		
	Monostable, starting on de-energization Wa	Control by external contact (S)		
	On-delay Timer Es	Control by external contact (S)		

Power off

Contact open

U : voltage


S : external control

Power on

Contact closed

R : relay RUM


t : adjustable time delay

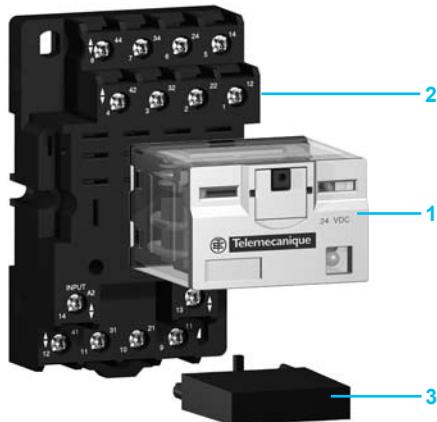

Introduction of the product range


The RPM power relay range includes:

- 1 15 A relays with 1, 2, 3 and 4 C/O (SPDT, DPDT, 3PDT and 4PDT) contacts.
- 2 Sockets with mixed contact terminals.
- 3 Protection modules (diode, RC circuit or varistor) or 1 timer module. Please note that the timer module can only be used with 3-pole or 4-pole sockets.
- 4 Metal hold-down clip for single-contact relays (not shown).

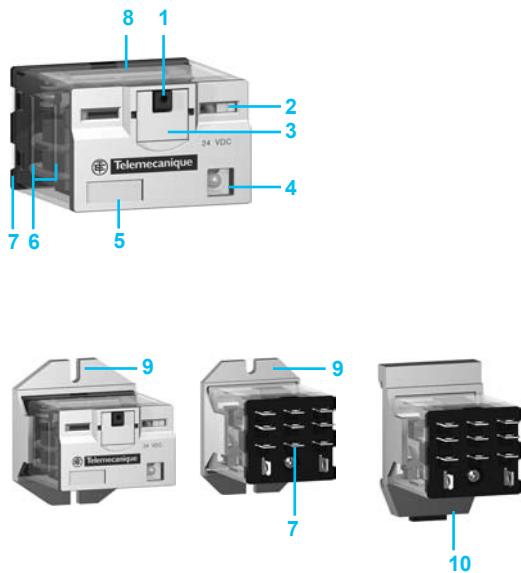

Relay description

- 1 Spring return push-to-test button for checking contact operation (green: --- , red: \sim).
- 2 Mechanical “relay status” indicator.
- 3 Removable lock-down door enables continuous engagement of the contacts for testing or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 Bipolar LED (depending on version) indicating the relay status.
- 5 Removable ID tag for relay identification.
- 6 Four notches for DIN rail mounting adapter or panel mounting adapter with fixing lugs.
- 7 Five, eight, eleven or fourteen quick-connect pins.
- 8 Area by which the product can be easily gripped.
- 9 Mounting adapter enabling direct mounting of the relay on a panel.
- 10 Mounting adapter enabling direct mounting of the relay on a DIN rail.

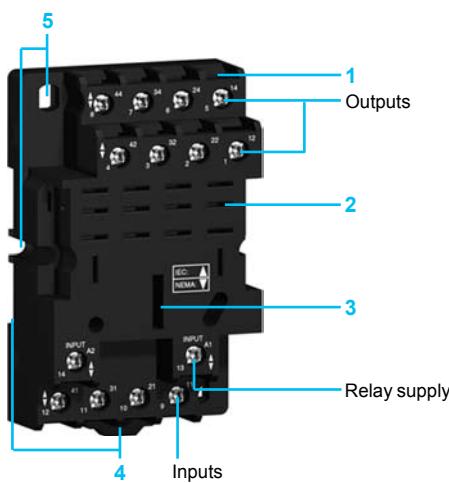

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals.
- 2 Five, eight, eleven or fourteen female contacts for the relay pins.
- 3 Location for protection modules or the timer module.
- 4 Locating slot for mounting on DIN rail with mounting clip.
- 5 Two or four mounting holes for panel mounting.

(1) The inputs are mixed with the relay coil terminals., with the outputs being located on the opposite side of the socket.

General characteristics




Conforming to standards		IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14	
Product certifications		cULus File E164862 CCN NLDX, NLDX7; cURus File E164862 CCN NLDX2, NLDX8; CSA; CE; RoHS compliant	
Ambient air temperature around the device	Storage	°C (F)	-40... +85 (-40... +185)
	Operation	°C (F)	-40... +55 (-40... +131)
Vibration resistance conforming to IEC/EN 60068-2-6	In operation		3 gn (10...150 Hz ± 1 mm / 5g/5 cycles)
	Not operating		5 gn (10...150 Hz ± 1 mm / 5g/5 cycles)
Degree of protection	Conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening		15 gn
	Closing		15 gn
Protection category			RT I
Mounting position			Any

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uiimp)		kV	4 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550
	Between poles	~ V	1550
	Between contacts	~ V	1500

Contact characteristics

Relay type		RPM1***	RPM2***	RPM3***	RPM4***
Number and type of contacts		1 C/O	2 C/O	3 C/O	4 C/O
Contact materials		AgNi			
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C	A	15		
Rated operational current in utilization categories AC-1 and DC-1	Conforming to IEC	NO	A	15	
		NC	A	7.5	
	Conforming to UL		A	15	
Switching current	Minimum	mA	10		
Switching voltage	Maximum	V	~ / ... 250 (IEC)		
	Minimum	V	17		
Nominal load (resistive)		A	15 / 250 ~ V		
		A	15 / 28 ... V		
Switching capacity	Maximum	~ VA	3750		
	...	W	420		
	Minimum	mW	170		
Maximum operating rate In operating cycles/hour	No-load		18 000		
	Under load		1200		
Utilization coefficient			20 %		
Mechanical durability	In millions of operating cycles		10		
Electrical durability	Resistive load		0.1	0.06	
In millions of operating cycles	Inductive load		See curves below		
Electrical durability of contacts	Resistive load ~	Reduction coefficient for inductive load ~ (depending on power factor cos φ)		Maximum switching capacity on resistive load ...	



Inductive load durability = resistive load durability x reduction coefficient.

Characteristics (continued)

Zelio® Plug-In Relays

RPM power relays

Coil characteristics								
Relay type				RPM1●●●	RPM2●●●	RPM3●●●	RPM4●●●	
Average consumption	~	VA	0.9	1.2	1.5	1.5	1.5	
	---	W	0.7	0.9	1.7		2	
Drop-out voltage threshold		~	$\geq 0.15 U_c$					
		---	$\geq 0.1 U_c$					
Operating time (response time)	Between coil energization and making of the NO contact	~	ms	20	25	25	20	
		---	ms	20	25	25	20	
	Between coil de-energization and making of the NC contact	~	ms	20				
		---	ms	20				
Control circuit voltage U_c		V	12	24	48	110	120	
Relay control voltage codes			JD	BD	ED	FD	-	
d.c. supply	Average resistance at $20^\circ C \pm 10\%$	RPM1●●●	Ω	180	750	2600	13 100	
		RPM2●●●	Ω	160	650	2600	11 000	
		RPM3●●●	Ω	100	400	2600	8600	
		RPM4●●●	Ω	96	388	1550	7340	
	Operating voltage limits	Min.	V	9.6	19.2	38.4	88	
		Max.	V	13.2	26.4	52.8	121	
Relay control voltage codes			-	B7	E7	-	F7	
							P7	
a.c. supply	Average resistance at $20^\circ C \pm 15\%$	RPM1●●●	Ω	-	160	720	4430	
		RPM2●●●	Ω	-	180	770	4430	
		RPM3●●●	Ω	-	103	770	2770	
		RPM4●●●	Ω	-	84.3	338	2220	
	Operating voltage limits	Min.	V	-	19.2	38.4	96	
		Max.	V	-	26.4	52.8	132	
							184	
							253	

Socket characteristics

Socket type	RPZF1	RPZF2	RPZF3	RPZF4
Relay types used	RPM1***	RPM2***	RPM3***	RPM4***
Protection module types used	RXM02*** RXM04***	RXM02*** RXM04***	RUW24***	RUW24***
Contact terminal arrangement	Mixed			
Wire connection method	Screw clamp terminals			
Product certifications	cURus File E172326 CCN SWIV2, SWIV8; CSA; CE; RoHS compliant			
Conforming to standards	IEC 61984, CE			

Electrical characteristics

Conventional thermal current (I_{th})	A	16
Maximum operating voltage	V	250 (IEC)

Insulation characteristics

Between adjacent output contacts	Vrms	2500
Between input and output contacts	Vrms	2500
Between contacts and DIN rail	Vrms	2500

General characteristics

Ambient air temperature around the device	Operation	°C	- 40...+ 55
	Storage	°C	- 40...+ 85
Degree of protection	Conforming to IEC/EN 60529		IP 20

Connection	Solid wire	1 conductor
-------------------	------------	-------------

without cable end	2 conductors	0.5...1.5 mm ² - AWG 20...AWG 16	0.5...2.5 mm ² - AWG 20...AWG 14
-------------------	--------------	---	---

flexible wire with cable end 1 conductor 0.25...1 mm² - AWG 22...AWG 17 0.25...1.5 mm² - AWG 22...AWG 16

Maximum tightening

Mounting 35 mm DIN rail / panel mount

Mounting on DIN rail

Terminal referencing IEC, NEMA

Compatibility with the metal hold-down clip

Timer module compatibility	No	Yes
Protection module	RYM010W, RYM011cc, RYM021cc	RJM24cc


Protection module

Clip-in ID tags

Wire connection method Screw clamp terminals

WHO connects

For more information about the study, please contact Dr. Michael J. Hwang at (319) 356-4000 or email at mhwang@uiowa.edu.



Introduction: pages 42

Characteristics: pages 43 and 44

Product selector: pages 45 and 46

Dimensions:
pages 47 and 48

Wiring diagrams:
page 49



RPM41BD

Control circuit voltage	Number and type of contacts - Thermal current (Ith)							
	1 C/O - 15 A		2 C/O - 15 A		3 C/O - 15 A		4 C/O - 15 A	
	Catalog number	Weight	Catalog number	Weight	Catalog number	Weight	Catalog number	Weight
V	kg	kg	kg	kg	kg	kg	kg	kg
... 12	RPM11JD	0.026	RPM21JD	0.036	RPM31JD	0.054	RPM41JD	0.071
... 24	RPM11BD	0.026	RPM21BD	0.036	RPM31BD	0.054	RPM41BD	0.071
... 48	RPM11ED	0.026	RPM21ED	0.036	RPM31ED	0.054	RPM41ED	0.071
... 110	RPM11FD	0.026	RPM21FD	0.036	RPM31FD	0.054	RPM41FD	0.071



RPM42BD

Power relays with LED (sold in lots of 10)								
... 12	RPM12JD	0.026	RPM22JD	0.036	RPM32JD	0.054	RPM42JD	0.071
... 24	RPM12BD	0.026	RPM22BD	0.036	RPM32BD	0.054	RPM42BD	0.071
... 48	RPM12ED	0.026	RPM22ED	0.036	RPM32ED	0.054	RPM42ED	0.071
... 110	RPM12FD	0.026	RPM22FD	0.036	RPM32FD	0.054	RPM42FD	0.071

~ 24	RPM12B7	0.026	RPM22B7	0.036	RPM32B7	0.054	RPM42B7	0.071
~ 48	RPM12E7	0.026	RPM22E7	0.036	RPM32E7	0.054	RPM42E7	0.071
~ 120	RPM12F7	0.026	RPM22F7	0.036	RPM32F7	0.054	RPM42F7	0.071
~ 230	RPM12P7	0.026	RPM22P7	0.036	RPM32P7	0.054	RPM42P7	0.071



RPZF2 + relay RPM22F7



RUW24***



RPZ1DA






RPZ3FA





Sockets					
Contact terminal arrangement	Connection	Relay type	Sold in lots of	Catalog number	Weight kg
Mixed	Screw clamp terminals	RPM1***	10	RPZF1	0.042
		RPM2***	10	RPZF2	0.054
		RPM3***	10	RPZF3	0.072
		RPM4***	10	RPZF4	0.094
Protection modules					
Description	Voltage	Socket type	Sold in lots of	Catalog number	Weight kg
Diode	— 6...250	RPZF1RPZ F2	20	RXM040W	0.003
	— 6...250	RPZF3 RPZF4	10	RUW240BD	0.004
RC circuit	~ 24...60	RPZF1RPZ F2	20	RXM041BN7	0.010
	~ 110...240	RPZF1RPZ F2	20	RXM041FU7	0.010
	~ 110...240	RPZF3 RPZF4	10	RUW241P7	0.004
Varistor	~— 6...24	RPZF1RPZ F2	20	RXM021RB	0.030
	~— 24...60	RPZF1RPZ F2	20	RXM021BN	0.030
	~— 110...240	RPZF1RPZ F2	20	RXM021FP	0.030
	~— 24	RPZF3 RPZF4	10	RUW242B7	0.004
	~— 240	RPZF3 RPZF4	10	RUW242P7	0.004
Timer module (1)					
Description	Voltage	Socket type	Catalog number		Weight
Multifunction	~— 24... 240	RPZF3 RPZF4			kg
			RUW101MW		0.020
Accessories					
Description	For use with	Sold in lots of	Catalog number	Weight kg	
Metal hold-down clip (for single-pole relays)	RPZF1	20	RPZR235	0.001	
Mounting adapters for DIN rail (2)	RPM1***	20	RPZ1DA	0.004	
	RPM2***	20	RXZE2DA	0.004	
	RPM3***	20	RPZ3DA	0.004	
	RPM4***	20	RPZ4DA	0.006	
Mounting adapters with fixing lugs for panel	RPM1***	20	RPZ1FA	0.002	
	RPM2***	20	RXZE2FA	0.002	
	RPM3***	20	RPZ3FA	0.003	
	RPM4***	20	RPZ4FA	0.004	
Clip-in ID tags (sheet of 108 ID tags)	All relays	10	RXL520	0.080	

(1) See timer module description (selection of functions and time delays) on page 41

(2) Test button becomes inaccessible.

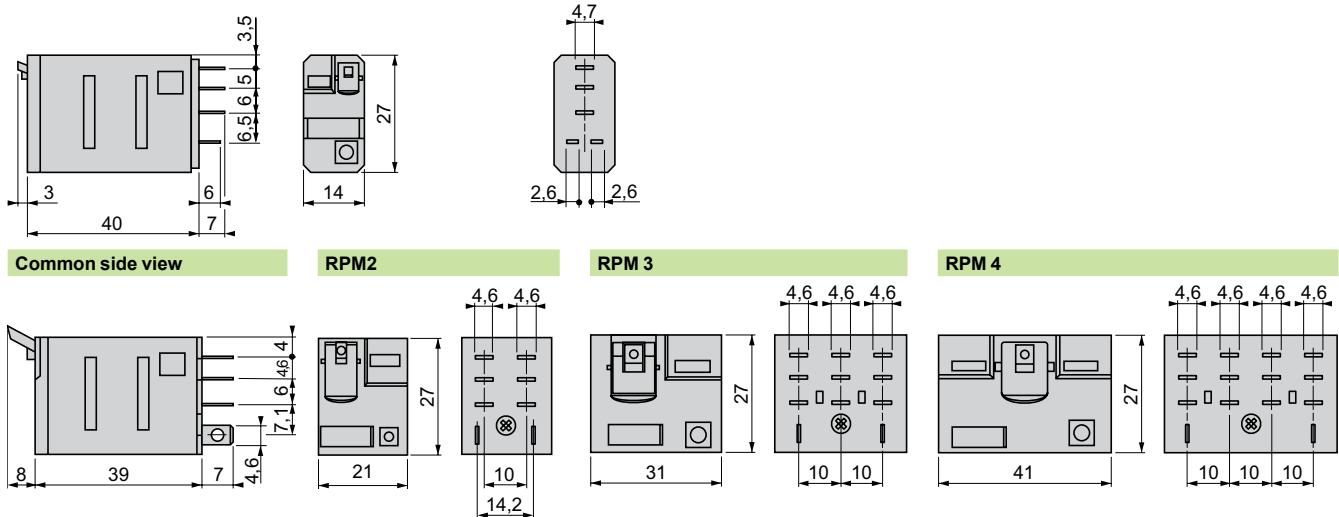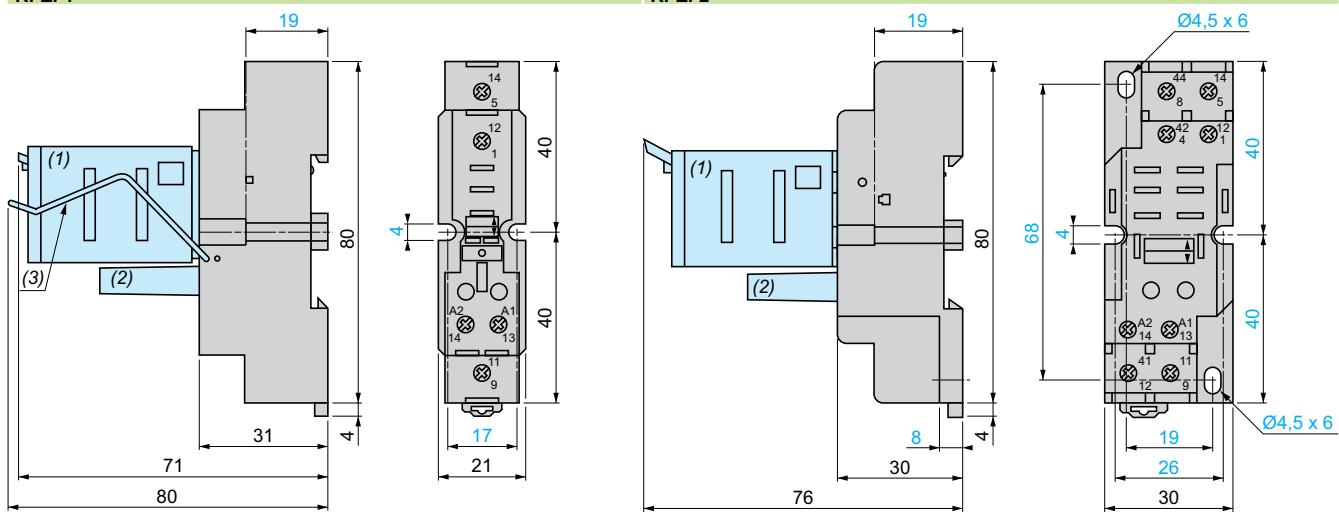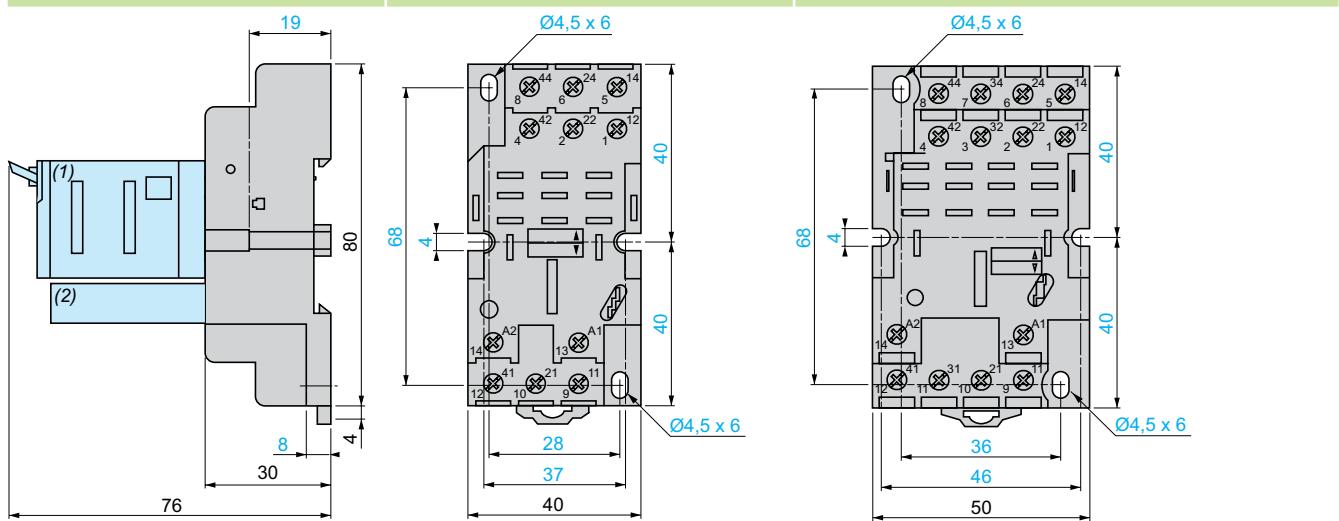Dimensions (mm):**Power relays****RPM 1****Sockets****RPZF1****RPZF2****Common side view****RPZF3****RPZF4**

(1) Relays
 (2) Protection module
 (3) Retention clip

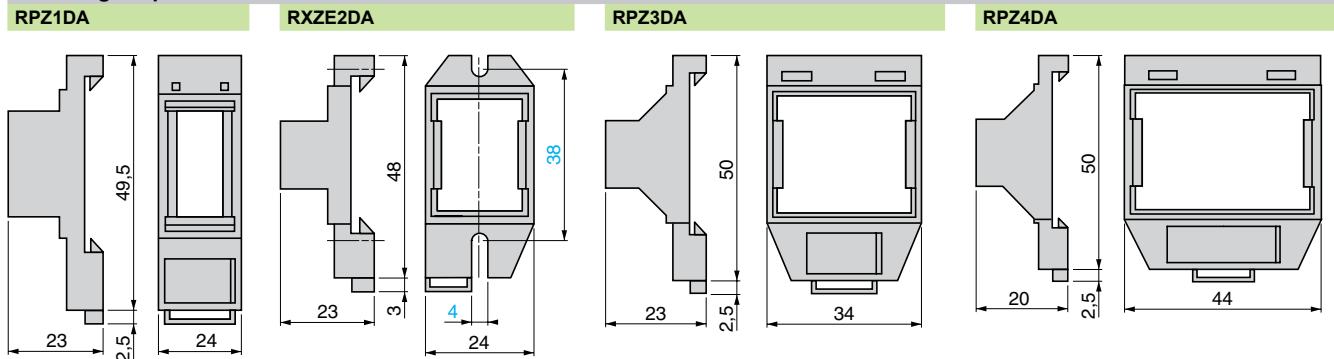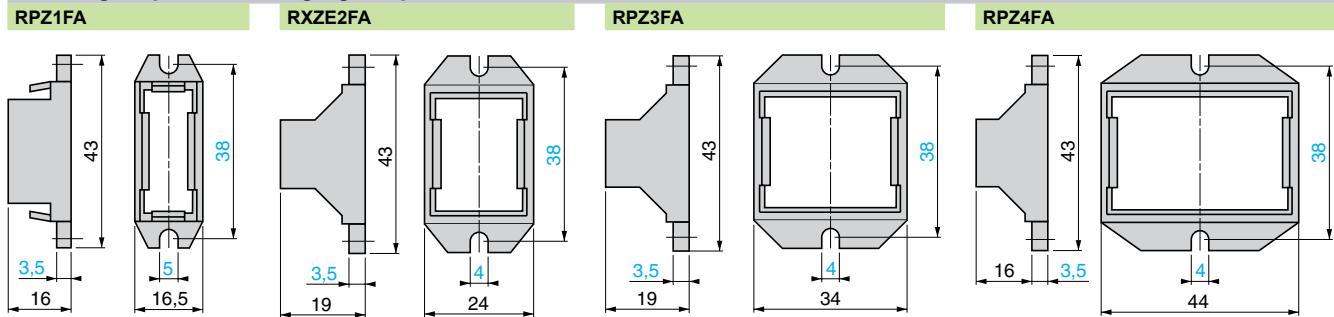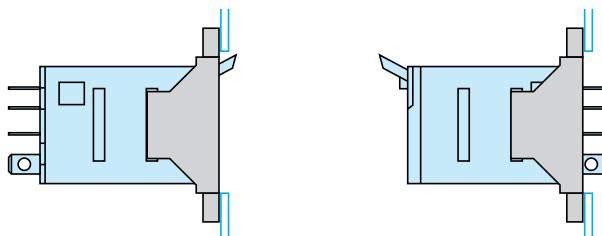
Dimensions (mm):**Mounting adapters for DIN rail****Mounting adapters with fixing lugs for panel****Mounting****Mounting adapters for DIN rail (1)****Mounting adapters with fixing lugs for panel**

(1) Test button becomes inaccessible


Wiring diagrams

Power relays


RPM1●●●








RPM2●●●



RPM3●●●




RPM4●●●




Symbols shown in blue correspond to Nema marking.

Sockets


RPZF1




RPZF2



RPZF3




RPZF4




Symbols shown in blue correspond to Nema marking.

Protection modules


RXM040W, RUW240BD




RXM041●●●, RUW241P7



RXM021●●●, RUW242●●



Introduction of the product range

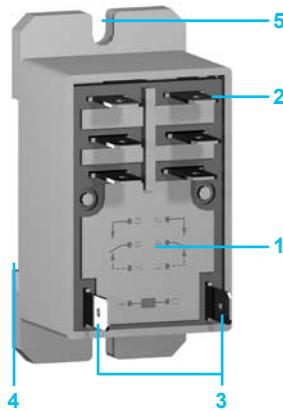

- 1 30 A relays with 2 C/O or 2 N/O contacts
- 2 Four or six quick-connect terminals
- 3 Two relay coil terminals
- 4 A locating slot for DIN rail mounting
- 5 Two holes for panel mounting


General characteristics

Conforming to standards		IEC/EN 61810-1 (issue 2), UL 508, CSA C22-2 n°14
Product certifications		UL, CSA
Ambient air temperature around the device	Storage	°C (°F) - 40...+ 85 (-40... +185)
	Operation	°C (°F) - 40...+ 55 (-40... + 131)
Vibration resistance conforming to IEC/EN 60068-2-6	In operation	3 gn (10...150 Hz / ± 1 mm/5 g/5 cycles)
	Not operating	10 gn (10...150 Hz / ± 1 mm/5 g/5 cycles)
Degree of protection	Conforming to IEC/EN 60529	IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening	10 gn
	Closing	10 gn
Protection category		RT IV
Mounting position		Any

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250
Rated impulse withstand voltage (Uimp)		kV	4 (1,2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	1550
	Between poles	~ V	1550
	Between contacts	~ V	1500

Contact characteristics		RPF 2A••	RPF 2B••
Relay type			
Number and type of contacts		2 N/O	2 C/O
Contact materials		AgSnO ₂	
Conventional thermal current (I_{th})	For ambient temperature ≤ 40°C	A	30 (when mounted with 13 mm gap between two relays) 25 (when mounted side by side without a gap)
Rated operational current in utilisation category AC-1	Conforming to IEC "C" "O"	A	30 3
	Conforming to UL	A	30
Switching current	Minimum	mA	10
Switching voltage	Maximum	V	~ 250 (IEC)
	Minimum	V	~ 17
Nominal load (resistive)			30 A / 250 ~ V - 30 A / 28 ~ V (when mounted with 13 mm gap between two relays) 25 A / 250 ~ V - 25 A / 28 ~ V (when mounted side by side without a gap)
Switching capacity	Maximum		7500 ~ VA / 840 W (when mounted with 13 mm gap between two relays) 6250 ~ VA / 700 W (when mounted side by side without a gap)
	Minimum	mW	170
Maximum operating rate	No load		18 000
In operating cycles/hour	Under load		1200
Utilization coefficient			10 %
Mechanical durability	In millions of operating cycles		5
Electrical durability	Resistive load		0.05 (N/O contact only)
In millions of operating cycles	Inductive load		See curves below

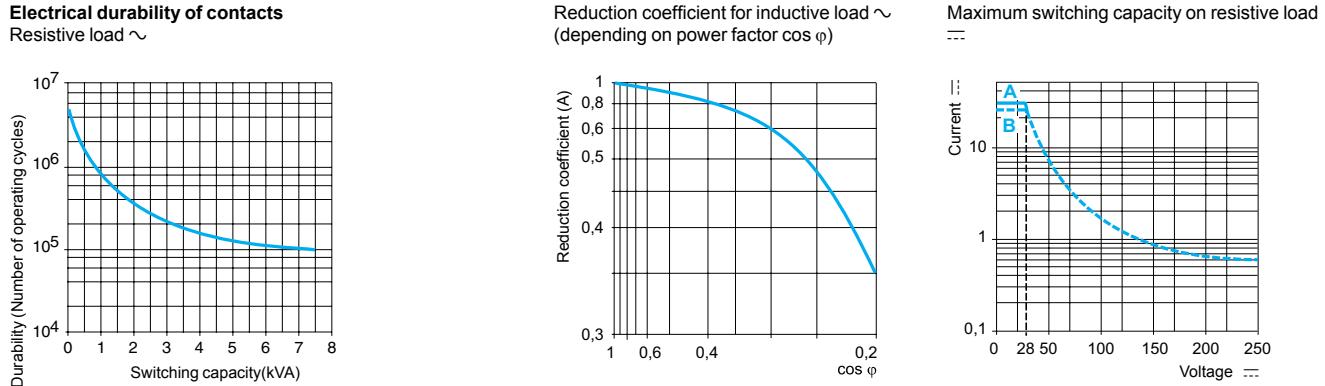

Coil characteristics

Average consumption	~	VA	4		
	...	W	1.7		
Drop-out voltage threshold	~		≥ 0.15 U _c		
	...		≥ 0.1 U _c		
Operating time (response time)	Between coil energization and making of the On-delay contact	ms	20		
	Between coil de-energization and making of the Off-delay contact	ms	20		
Control circuit voltage U_c		V	12	24	110
Relay control voltage codes		JD	BD	FD	—
DC supply	Average resistance at 20 °C ± 10%	Ω	86	350	7255
	Operating voltage limits	Min.	V	9.6	19.2
		Max.	V	13.2	26.4
Relay control voltage codes		—	B7	—	F7
AC supply	Average resistance at 20 °C ± 15%	Ω	—	250	3200
	Operating voltage limits	Min.	V	—	96
		Max.	V	—	184
		—	—	26.4	132
		—	—	—	253



RPF 2Bxx

Power relays(sold in lots of 10)


Control circuit voltage	Number and type of contacts - Thermal current (I _{th})		
	2 N/O - 30 A (1)	2 C/O - 30 A (1)	Catalog number
V			Weight
— 12	RPF2AJD	RPF2BJD	0.082
— 24	RPF2ABD	RPF2BBD	0.082
— 110	RPF2AFD	RPF2BFD	0.082
~ 24	RPF2AB7	RPF2BB7	0.082
~ 120	RPF2AF7	RPF2BF7	0.082
~ 230	RPF2AP7	RPF2BP7	0.082

(1) 30 A when mounted with 13 mm gap between two relays and 25 A when mounted side by side without a gap.

Dimensions

Power relays

RPF 2A●●, RPF 2B●●

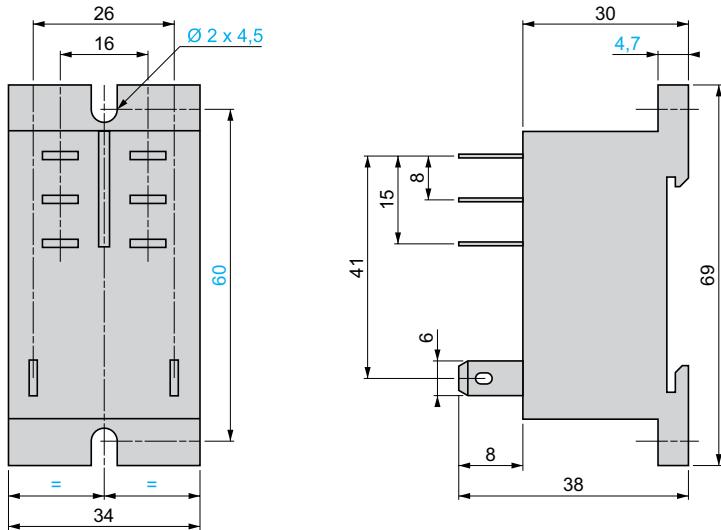


Schemes

Power relays

RPF 2A●●

RPF 2B●●

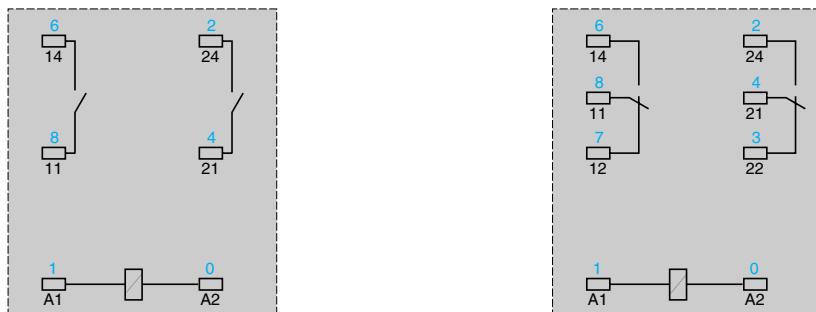

Symbols shown in blue correspond to Nema marking.

Applications**Electromechanical interface modules**

Functions	Input	
Width (mm)	17.5	9.5
Contact arrangement	1 N/O 2 N/O 1 C/O	1 N/O
Thermal current	–	
Control voltages	... 110...127 V ~ 24 V, 48 V ~ 115...127 V ~ 230/240 V	
Indication	Mechanical for contacts and/or LED for control	LED for control
Product numbers	ABR1E	ABR2E
Pages	56	62

Solid state interface modules



Output	Input and output Very low level switching	Input	Output	
17.5	12	17.5	9.5	
1 N/O 2 N/O 1 C/O 1 N/C + 1 N/O	1 N/O	1 C/O	–	
12 A	5 A	–	5 A	
... 24 V ~ 24 V, 48 V ~ 115...127 V ~ 110 V	... 24 V	... 5, 24, 48 V ~ 115...127/50 Hz ~ 120...127/60 Hz ~ 230...240/50 Hz ~ 230...240/60 Hz	... 24 V	
Mechanical for contacts and/or LED for control	LED for control			
ABR1S	ABR2S	ABR2•B312B	ABS2E	ABS2S
56	62	62	68	



ABR-1 electromechanical interface modules are supplied in the form of compact modules, 17.5 mm wide.

They are designed for interfacing discrete digital control signals exchanged within an automated system between the processing unit (PLC, numerical controller, etc) and the other components (contactors, solenoid valves, indicator lamps, proximity sensors, etc).

These products are based on advanced contactor technology and are easily adapted to industrial environments. They conform to the most recent IEC 947-5-1 standards.

Composition

The ABR-1 range includes 2 families:



Input interfaces

Input interfaces are designed for switching input signals to the processor and are characterized by their advanced contact reliability: less than 1 interruption per 100 million operating cycles at ≈ 17 V, 5 mA.

The switching level is sufficiently high to help ensure that the interfaces can directly control most contactors and indicator lamps.

Output interfaces

Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for signalling devices (indicators lamps, audible warnings, etc). They are characterized by a high switching capacity and an average durability 5 times greater than that of traditional interface modules, which incorporate standard relays.

- 1 Override contacts by pressing button (not holding it down) for a simple and quick test during installation or maintenance operations on the installation
- 2 Green indicator showing the mechanical position of the contacts
- 3 LED indicating the control signal state
- 4 Channel identification : 5 individual characters for AB1-R/G or one AB1-SA2 marker tag
- 5 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal. The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.


Characteristics

Interfaces

For discrete signals

Electromechanical interface modules

Examples of applications with PLCs

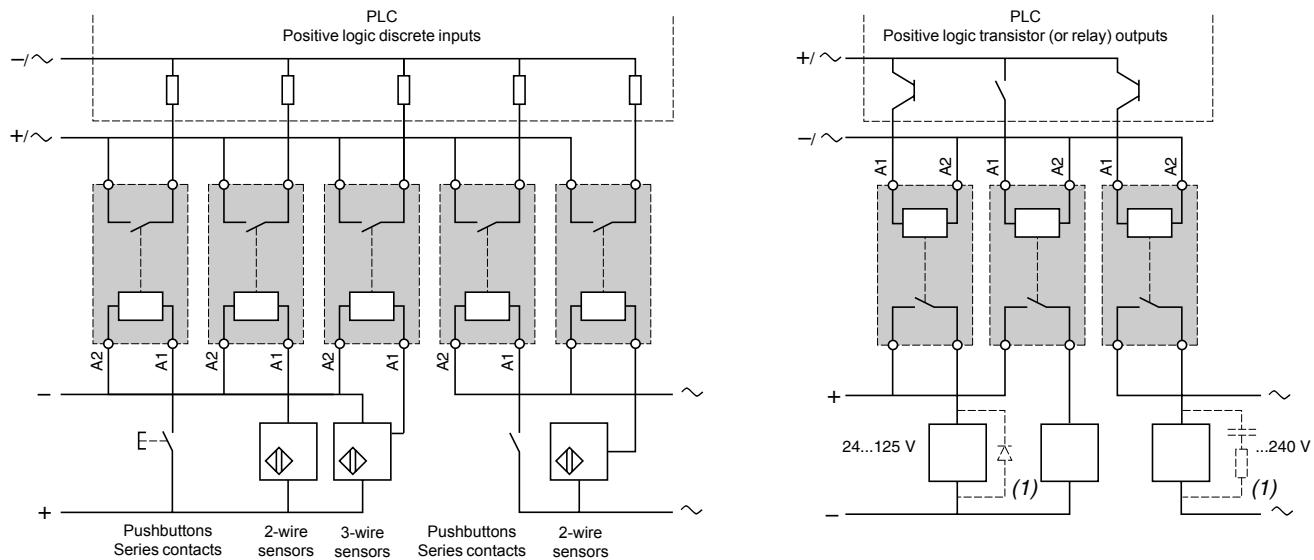

(1) Essential on inductive loads (can be replaced with peak limiter \square).

Environment

Conforming to standards				IEC 60947-1, UL 508, CSA C22.2 No. 14
Product certifications				UL, CSA, BV, LROS, DNV
Degree of protection	Conforming to IEC 529 (protection against direct contact)			IP 00
Protective treatment				"TC"
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C	850
		Conforming to UL 94		V0
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms		50 gn
Vibration resistance	Conforming to IEC 68-2-6	10...55 Hz		6 gn
Resistance to electrostatic charges	Conforming to IEC 801-2	Level 3	kV	8
Resistance to rapid transients	Conforming to IEC 801-4	On power supply	kV	2
		On I/O	kV	1
Resistance to shock waves	Conforming to IEC 255-4	Waveform 1.2/50 ms ; 0.5 J	U < 50 V U > 50 V	0.5 2.5
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm ²	0.6...2.5
	Flexible wire with cable end	1 or 2-wire	mm ²	0.34...2.5
	Rigid cable	1-wire	mm ²	0.27...4
		2-wire	mm ²	0.27...2.5
Operating position				Any
Ambient air temperature around the device	Unrestricted operation		°C	- 5...+ 40
	Permissible at Un		°C	- 20...+ 60
	Storage		°C	- 40...+ 70
Operating altitude			m	≤ 3000
Installation category	Conforming to IEC 947-1			II
Degree of pollution	Conforming to IEC 947-5-1			3
Mounting				Standard DIN rails

Characteristics (continued)

Interfaces

For discrete signals


Electromechanical interface modules

Control circuit characteristics (40°C ambient temperature)											
Type of interface		ABR 1S•02B	ABR 1•••8B	ABR 1•••8E	ABR 1E•12F	ABR 1•••1F	ABR 1E•11M	ABR 1E•01M			
Rated voltage (Uc)	V	— 24	≈ 24	≈ 48	— 110...127	≈ 115...127	≈ 230...240	≈ 230...240			
Current frequency	Hz	—	50/60	50/60	—	50/60	50/60	50/60			
Energization threshold (at ± 5 %)	V	15	16.5	34	75	86	170	164			
Maximum operating voltage	V	30	30	53	140	140	264	264			
Maximum drop-out (at ± 5 %) voltage (Uo)	V	3.2	3.8	8.5	16	34	68	78			
Maximum current (Un)	mA	62	62/55	36/32	15	8	7	5.5			
Minimum holding current	mA	6.6	4.9/5.2	4.7/5.4	1.5	2.4	2	1.5			
Maximum dissipated power	W	1.5	1.5	1.5	1.5	1.5	1.5	1.5			
Disappearance of voltage maximum time up to which contact is maintained	ms	3	8	10	10	6	5	6			
Display of control circuit by LED		No	Yes	Yes	Yes	Yes	Yes	No			
Built-in protection reversed polarity		Yes	Yes	Yes	Yes	—	—	—			
Contact characteristics											
Type of interface		ABR1E••••			ABR1S••••						
Maximum switching voltage	~ V	252			252						
	— V	125			125						
Maximum rated operating voltage Ue	Conforming to IEC 947-5-1	~ V	230			230					
		— V	125			125					
Operating current frequency	Hz	50/60			50/60						
Thermal current Ith	Conforming to IEC 947-1	A	2			12					
Rated operating current (Ie)	Conforming to IEC 947-5-1 Ue : ≈ 230 V per 1 million operating cycles	AC12	A	2			4				
		AC13	A	1			1				
		AC14	A	1			1				
		AC15	A	1			1				
	Conforming to IEC 947-5-1 Ue : ≈ 24 V	DC12	A	2			5				
		DC13	A	1			1				
Minimum switching capacity	mA	3			3						
Minimum switching voltage	V	17			17						
Protection against short-circuits	For Ik ≤ 2.5 kA (≈) and ≤ 100 A (—) Type and value of recommended fuse	A	gG/gF : 16			gG/gF : 16					
Low power switching performance of contacts	Number of interruptions per "n" million operating cycles (17 V - 5 mA)		10 ⁻⁸			10 ⁻⁸					
Other characteristics											
Operating time at Un and at 20 °C	Between energization of coil and closing of N/O contact	ms	≤ 12								
	Between energization of coil and opening of N/C contact	ms	≤ 12								
	Between de-energization of coil and opening of N/O contact	ms	≤ 12								
	Between de-energization of coil and closing of N/C contact	ms	≤ 12								
Duration of bounce		ms	≤ 3								
Contact bridging times	Maximum make before break or break between contact "N/C" and "N/O"	ms	1								
Maximum operating rate	At no-load At Ie	Hz	6 0.5								
Mechanical durability	ABR-1 (1 N/O or 2 N/O) in millions of operating cycles		≥ 20 million			≥ 10 million					
Rated isolation voltage	Conforming to IEC 947-1 Conforming to VDE 0110 group C	V	250								
Insulation test voltage for 1 min.	Between coil circuit and contact circuits Between wired interface and ground Between independent contacts	kV	4 2.5 1.5								


Electrical durability of contacts

Test conditions : in accordance with standard IEC 947-5-1 set up for rated control voltage, operating rate : 1800 cycles/hour. (0.5 Hz).


a.c. loads

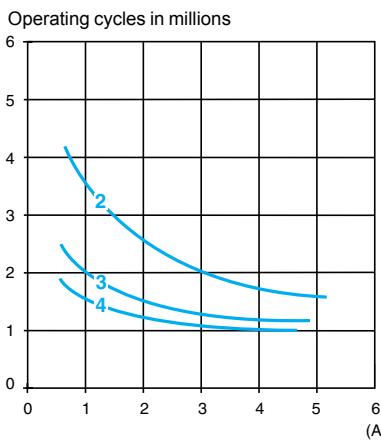

AC-12 : control of resistive loads and isolated solid state loads via optocoupler
 $\cos \varphi \geq 0.9$

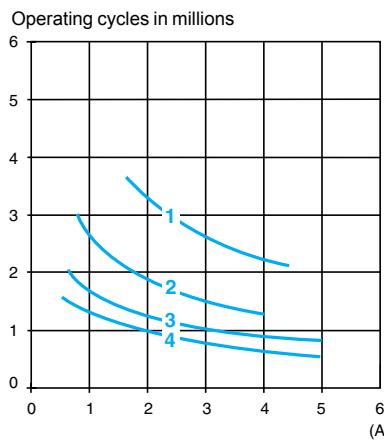


AC-13 : control of isolated solid state loads via transformer
 $\cos \varphi \geq 0.65$

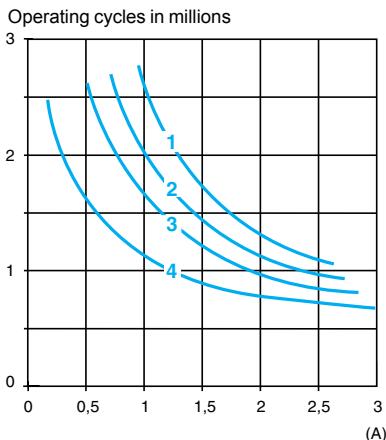


AC-14 : control of weak electromagnetic loads of electromagnets ≤ 72 VA
make: $\cos \varphi = 0.3$
break: $\cos \varphi = 0.3$
AC-15 : control of electromagnetic loads of electromagnets > 72 VA
make: $\cos \varphi = 0.7$
break: $\cos \varphi = 0.4$

- 1 24 V
- 2 48 V
- 3 127 V
- 4 230 V

d.c. loads

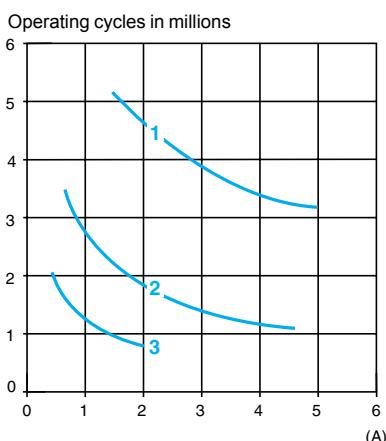

DC-12 : control of resistive loads and isolated solid state loads via optocoupler
 $L/R \leq 1$ ms

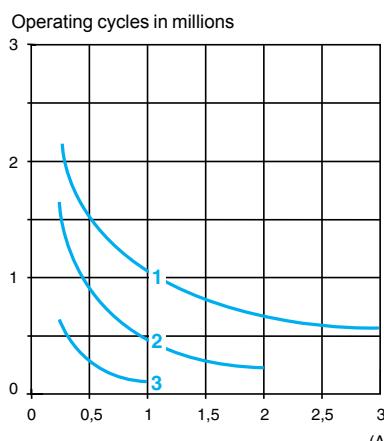

DC-13 : control of electromagnets
 $L/R \leq 2 \times (U_e \times I_e)$ in ms.
Ue: rated operating voltage
Ie: rated operating current

Product selector

Interfaces

For discrete signals

Electromechanical interface modules

Control circuit: a.c. or d.c.




ABR1E101M



ABR1E318B



ABR1S102B



ABFC08R•••

Input interface modules (1) (17.5 mm pitch)

Display	Contact Configuration	Control circuit	Catalog number	Weight
		V		kg
Mechanical (2)	1 N/O	~ 230/240	ABR1E101M	0.090
	1 C/O	~ 230/240	ABR1E301M	0.090
Mechanical (2) + LED (3)	1 N/O	~ 24	ABR1E118B	0.095
		~ 48	ABR1E118E	0.095
		... 110...127 (4)	ABR1E112F	0.095
		~ 115...127	ABR1E111F	0.095
		~ 230/240	ABR1E111M	0.095
	2 N/O	~ 24	ABR1E418B	0.095
		~ 48	ABR1E418E	0.095
		... 110...127(4)	ABR1E412F	0.095
		~ 115...127	ABR1E411F	0.095
		~ 230/240	ABR1E411M	0.095
	1 C/O	~ 24	ABR1E318B	0.095
		~ 48	ABR1E318E	0.095
		... 110...127(4)	ABR1E312F	0.095
		~ 115...127	ABR1E311F	0.095
		~ 230/240	ABR1E311M	0.095

Output terminals-relays (1) (17.5 mm pitch)

Display	Contact Configuration	Control circuit	Catalog number	Weight
		V		kg
Mechanical (2)	1 N/O	... 24	ABR1S102B	0.090
	2 N/O	... 24	ABR1S402B	0.090
	1 C/O	... 24	ABR1S302B	0.090
	1 N/C + 1 N/O	... 24	ABR1S602B	0.090
Mechanical (2) + LED (3)	1 N/O	~ 24	ABR1S118B	0.095
		~ 48	ABR1S118E	0.095
		~ 115...127	ABR1S111F	0.095
	2 N/O	~ 24	ABR1S418B	0.095
		~ 48	ABR1S418E	0.095
		~ 110	ABR1S411F	0.095
	1 C/O	~ 24	ABR1S318B	0.095
		~ 48	ABR1S318E	0.095
		~ 110	ABR1S311F	0.095
	1 N/C + 1 N/O	~ 24	ABR1S618B	0.095
		~ 48	ABR1S618E	0.095
		~ 110	ABR1S611F	0.095

Commoning links

Description	For common	Color	Distance between wire ends	Catalog number	Weight
			cm		kg
Commoning links in modules 8 x 1 mm ²	Coil	White	12	ABFC08R12W	0.020
			2	ABFC08R02W	0.010
	~	Red	12	ABFC08R12R	0.020
			2	ABFC08R02R	0.010
	---	Blue	12	ABFC08R12B	0.020
			2	ABFC08R02B	0.010

(1) Connection by screw-clamp.


(2) By green mechanical indicator light for contact(s) activated electrically or mechanically by pressing the test button.

(3) By green LED illuminated when control signal is present.


(4) With polarization (+ on A1, - on A2).

Dimensions (mm):

ABR 1E




ABR 1S

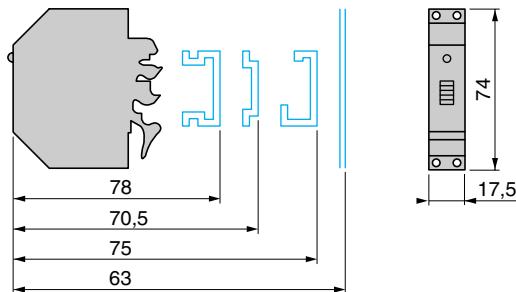


Wiring diagrams

— 24 V or ~ 230 V interfaces with mechanical indication


1 N/O




1 C/O



2 N/O




1 N/C + 1 N/O




≈ 24 V or ≈ 48 V interfaces with mechanical indication + LED


1 N/O




1 C/O



2 N/O




1 N/C + 1 N/O




≈ / ~ 110 V or ≈ 230 V interfaces with mechanical indication + LED


1 N/O




1 C/O



2 N/O



1 N/C + 1 N/O




Interfaces

For discrete signals

Slim electromechanical interface modules

ABR-2 electromechanical interface modules complement the ABR-1 range. They are characterized by micro relay technology which allows reduced dimensions and very low switching levels (TTL, HCMOS, analog signals). The ABR-2 family is in the form of slim compact modules, 9.5 mm wide for input interface modules, 12 mm wide for output interface modules and 17.5 mm wide for very low level switching products.

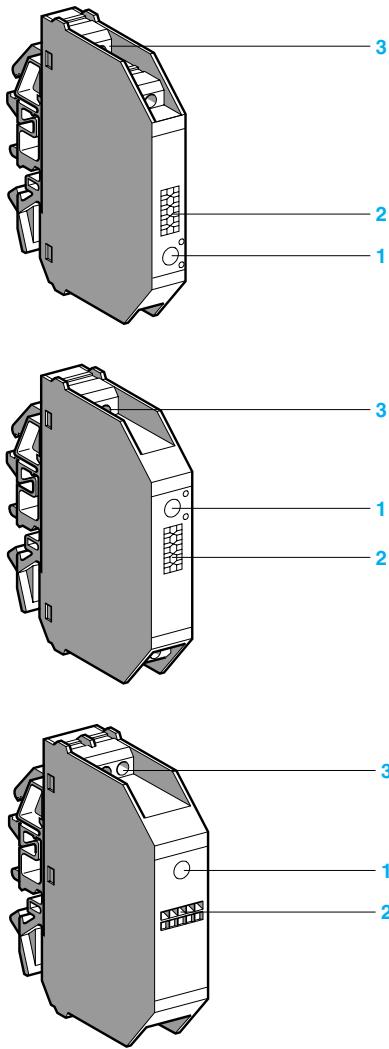

Description

The ABR-2 includes 3 families:

Input interfaces (9.5 mm pitch)

Input interfaces are designed for switching input signals to a processor and are characterized by their advanced contact reliability: less than 1 interruption per 100 million operating cycles at ≈ 17 V, 5 mA.

They have increased immunity to current leakages ≤ 2 mA, and a wide coil voltage range (0.7 to 1.25 Un).

Output interfaces (12 mm pitch)

Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for signalling devices (indicators lamps, audible warnings etc). They are characterized by a high switching capacity and an advanced immunity to current leakages ≤ 2 mA. A lower cost version without LED signalling is available.

Low level switching input and output interfaces (17.5 mm pitch) with 1 C/O contact.

These interfaces are designed for switching logic (TTL or HCMOS) and analog signals.

Warning: never switch inductive loads with this type of interface.

The front panel of the ABR-2 electromechanical interface module includes:

- 1 LED indicating the control signal state
- 2 Channel identification : 5 individual characters for AB1-R/G or 1 AB1-SA2 marker tag
- 3 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal. The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.



Characteristics

Interfaces

For discrete signals

Slim electromechanical interface modules

Examples of applications with PLCs

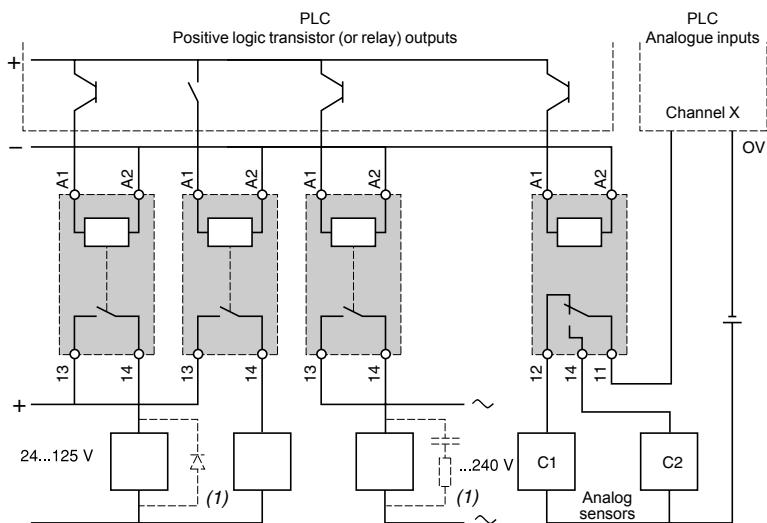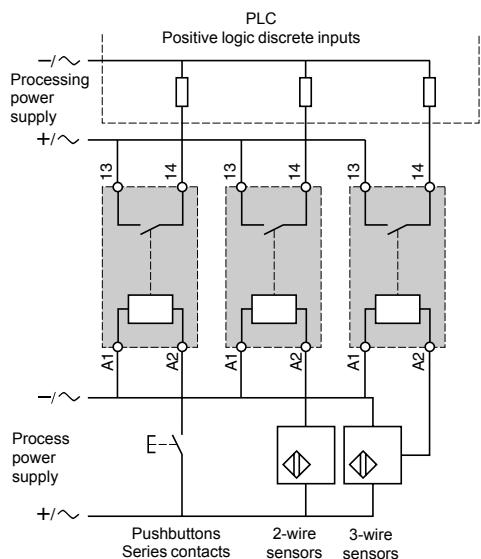

ABR2E••••

ABR2S••••

ABR2SB12B

(1) Essential on inductive loads (can be replaced with peak limiter).

Environment

Conforming to standards		IEC 60947-1, UL 508, CSA C22.2 No. 14	
Product certifications		UL, CSA, BV, LROS, DNV	
Degree of protection	Conforming to IEC 529 (protection against direct contact)		IP 20
Protective treatment		"TC"	
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C 960
		Conforming to UL 94	V0
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms	30 gn
Vibration resistance	Conforming to IEC 68-2-6	10...150 Hz	3 gn
Resistance to electrostatic discharges	Conforming to IEC 801-2	Level 3	kV 8
Resistance to electromagnetic fields	Conforming to IEC 801-3	Level 3 ; 27...1000 MHz	V/m 10
Resistance to rapid transients	Conforming to IEC 801-4 Level 3	On power supply	kV 2
		On I/O	kV 1
Resistance to shock waves	Conforming to IEC 947-1	Waveform 1.2/50 µs ; 0.5 J	kV 0.5
		U < 50 V	kV 1.5
		U < 150 V	kV 2.5
		U < 300 V	
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm² 0.6...2.5
	Flexible wire with cable end	1 or 2-wire	mm² 0.34...2.5
	Rigid cable	1-wire	mm² 0.27...4
Operating position		Any	
Ambient air temperature	Unrestricted operation		°C - 5...+ 40
	Operation from 0.85...1.1 Us (assigned voltage)		°C - 5...+ 55
	Operation restricted to Us (assigned voltage)		°C - 25...+ 70 (2)
	Storage		°C - 40...+ 80
Operating altitude		m	≤ 3000
Installation category	Conforming to IEC 947-1		II
Degree of pollution	Conforming to IEC 947-1		2
Mounting		Standard DIN rails	

(2) Leave space of 8 mm between ABR-2S1••• for an ambient temperature $\geq 55^{\circ}\text{C}$

Characteristics (continued)

Interfaces

For discrete signals

Slim electromechanical interface modules

Control circuit characteristics (40°C ambient temperature)									
Type of interface		ABR 2E112B	ABR 2E112E	ABR 2E115F	ABR 2E116F	ABR 2E111M	ABR 2S112B	ABR 2S102B	ABR 2•B312B (1)
Rated voltage (Us)	V	— 24	— 48	~ 115...127	~ 120...127	~ 230...240	— 24	— 24	— 24
Current frequency	Hz	—	—	50	60	50/60	—	—	—
Energization threshold	V	16.9	37.3	93	97	186	16.9	14.5	16.9
Maximum operating voltage	V	28.8	57.6	140	140	264	28.8	28.8	28.8
Maximum drop-out voltage (Uo)	V	3.8	8.5	25.4	25.4	48	3.8	2	3.8
Maximum current (at Us)	mA	19.5	11	14	16	15	28	18	23
Minimum holding current	mA	2	2	2.5	2.5	2.5	2	1.3	2
Maximum dissipated power (at Us)	W	—	—	0.66	—	0.54	—	—	—
	W	0.45	0.52	—	0.73	0.77	0.64	0.43	0.55
Disappearance of voltage maximum time up to which contact is maintained	ms	1	1	10	10	10	1	5	1
Display of control circuit by LED		Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Built-in protection reversed polarity		Yes	Yes	—	—	—	Yes	Yes	Yes
Contact characteristics (40°C ambient temperature)									
Type of interface		ABR2E••••	ABR2S112B	ABR2S102B	ABR2•B312B (1)				
Contact configuration		1 N/O	1 N/O	1 N/O	1 C/O				
Maximum rated operating voltage (Ue max)	Conforming to IEC 947-5-1	~ V	127	230	230	48			
		— V	100	120	120	48			
Maximum switching voltage		~ V	140	250	250	60			
		— V	125	150	150	60			
Operating current frequency	Hz	50/60	50/60	50/60	50/60	50/60			
Thermal current Ith	Conforming to IEC 947-1	A	1	5	5	0.05			
Rated operating current (Ie)	Conforming to IEC 947-5-1	A	1	3	3	—			
for 1 million operating cycles	Ue max	A	0.5	1	1	—			
	AC12	A	0.5	1	1	—			
	AC14	A	1	3	3	—			
	AC15	A	1	5	5	—			
	Conforming to IEC 947-5-1	DC12	1	1.7	1.7	—			
	Ue : — 24 V	DC13	A	1	1.5	1.5	—		
Minimum switching current	mA	1	5	5	5	0.01			
Minimum switching voltage	V	5	5	5	5	0.01			
Protection against short-circuits	For $I_k \leq 1 \text{ kA} (\sim)$ and $\leq 100 \text{ A} (—)$		Type : quick-blow fuse with high breaking capacity						
	Type and value of recommended fuse	A	2	6.3	6.3	6.3	0.4		
Low level contact performance (17 V, 5 mA) per "n" million operating cycles ABR-2•B (30 mV, 10 μA)			1 per 100 million						
Other characteristics									
Maximum operating time at Us (bounce included)	Between energization of coil and closing of N/O contact	—	ms	10	10	10	6		
	~	ms	30	—	—	—	—		
	Between energization of coil and opening of N/C contact		ms	—	—	—	6		
	Between de-energization of coil and opening of N/O contact	—	ms	6	12	5	6		
	~	ms	30	—	—	—	—		
	Between de-energization of coil and closing of N/C contact		ms	—	—	—	6		
Maximum duration of bounce			ms	5	5	5	2		
No make before break guaranteed between "N/C" and "N/O" contacts	Maximum make before break	On energization	ms	—	—	—	5		
	before make time	On de-energization	ms	—	—	—	2		
Maximum operating rate	At no-load	Hz	10	10	10	10	10		
	At Ie	Hz	0.5	0.5	0.5	0.5	—		
Mechanical durability in millions of operating cycles			20	10	10	10	20		
Rated insulation voltage	Conforming to IEC 947-1	V	300	300	300	300	300		
	Conforming to VDE 0110 group C	V	250	250	250	250	250		
Insulation test voltage for 1 min	Coil circuit/contact circuits	kV rms	2	4	4	4	1.5		
	Wired interface/ground	kV rms	2.5	2.5	2.5	2.5	2.5		
	Between open contacts	kV rms	0.75	1	1	1	1		


(1) Do not switch inductive loads.

Electrical durability of contacts (ABR 2S)

Test conditions : in accordance with standard IEC 947-5-1 set up for rated control voltage.


a.c. loads

Operating cycles in millions

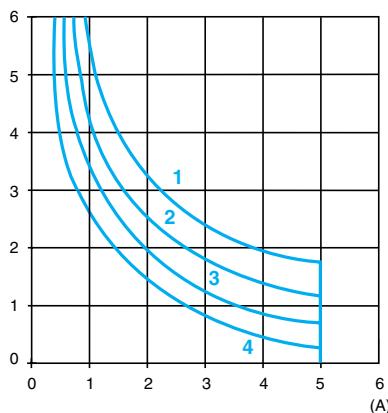

AC12 : control of resistive loads and isolated solid state loads via optocoupler
 $\cos \varphi \geq 0.9$


Operating cycles in millions

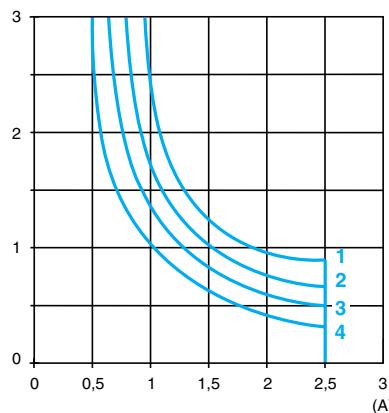

AC14 : control of weak electro-magnetic loads of electro-magnets $\leq 72 \text{ VA}$
make : $\cos \varphi = 0.3$
break : $\cos \varphi = 0.3$
AC15 : control of electro-magnetic loads of electro-magnets $> 72 \text{ VA}$
make : $\cos \varphi = 0.7$
break : $\cos \varphi = 0.4$


d.c. loads

Operating cycles in millions

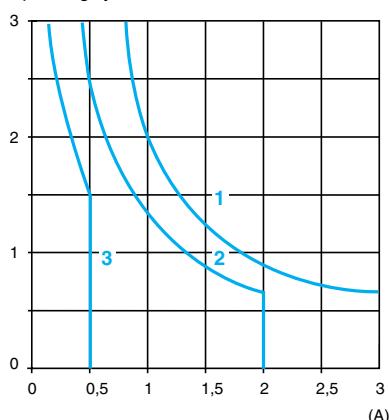

DC12 : control of resistive loads and isolated solid state loads via optocoupler
 $L/R \leq 1 \text{ ms}$

Operating cycles in millions

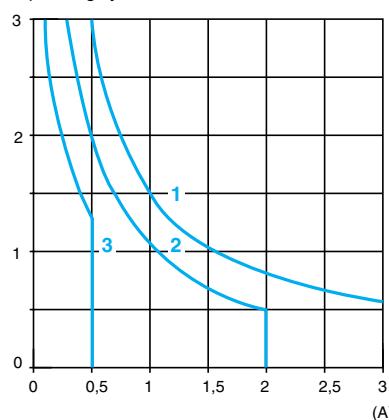


DC13 : control of electro-magnets
 $L/R \leq 2 \times (U_e \times I_e) \text{ in ms.}$
 U_e : rated operating voltage
 I_e : rated operating current
(with a load protection diode)

Interfaces


For discrete signals

Slim electromechanical interface modules


Control circuit: a.c. or d.c.




ABR2E112B



ABR2S112B



ABR2EB112B



ABFC08R...

Input modules (9.5 mm pitch)

Indication	Contact Configuration	Control circuit	Sold in lots of	Catalog number	Weight
With LED	1 N/O	V — 24 — 48 ~ 115...127 (50 Hz) ~ 120...127 (60 Hz) ~ 230...240 (50/60 Hz)	5 5 5 5 5	ABR2E112B ABR2E112E ABR2E115F ABR2E116F ABR2E111M	0.032 0.032 0.035 0.035 0.036

Output modules (12 mm pitch)

Indication	Contact Configuration	Control circuit	Sold in lots of	Catalog number	Weight
Without	1 N/O	V — 24	5	ABR2S102B	0.040
With LED	1 N/O	V — 24	5	ABR2S112B	0.041


Modules for very low level switching (17.5 mm pitch)

Indication	Contact Configuration	Control circuit	Catalog number	Weight
With LED	1 C/O (1)	V — 24	ABR2EB312B	0.048
With LED	1 C/O (1)	V — 24	ABR2SB312B	0.048
Flexible comb accessories				
Description	For common	Color	Distance between wire ends	Catalog number
Flexible comb modularity 8 x 1 mm ²	Coil	White	12	ABFC08R12W
			2	ABFC08R02W
		Red	12	ABFC08R12R
			2	ABFC08R02R
	—	Blue	12	ABFC08R12B
			2	ABFC08R02B


(1) Not for use with inductive loads.

Dimensions (mm):


ABR2E11••




ABR2S1•2B



ABR2EB312B

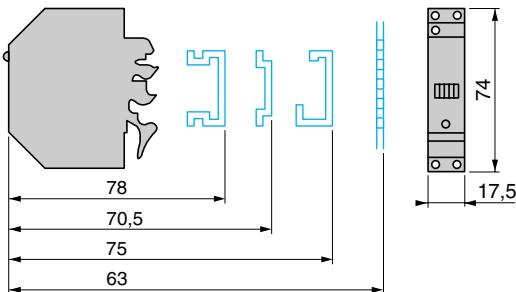


ABR2SB312B

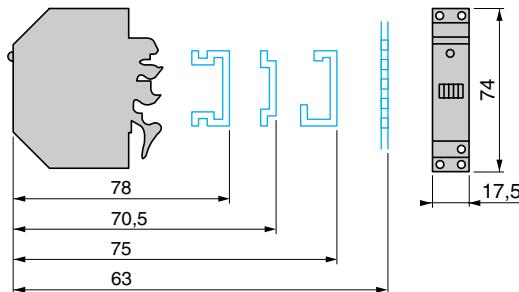


Circuit diagrams


ABR2E112B ($\perp\!\!\!/\!$ 24 V)




ABR2E112E ($\perp\!\!\!/\!$ 48 V)




ABR2E11•F/M (\sim 115...240 V)




ABR2S102B ($\perp\!\!\!/\!$ 24 V)



ABR2S112B ($\perp\!\!\!/\!$ 24 V)



ABR2•B312B ($\perp\!\!\!/\!$ 24 V)



The ABS-2 solid-state interface relays are supplied in the form of compact modules which appear identical to the ABR-2 electromechanical family.

They are designed for interfacing discrete digital control signals exchanged within an automated system between the processor (PLC, numerical controller, etc) and the other components (contactors, solenoid valves, indicator lamps, proximity sensors).

They are suitable for use in equipment which requires the benefits of electronic technology: a high operating rate, enhanced durability, silent operation.

These products are notable for their high performance and excellent adaptation to industrial environments. They also conform to the most recent IEC standards.

Composition




The ABS-2 range includes 2 families:

Input interfaces

The 9.5 mm wide input interfaces are designed for switching input signals to processors. They offer a wide choice of electrical isolation between signals due to the wide range of input voltages from ~ 5 V to ~ 230 V.

Output interfaces

Output interfaces are designed for the control of preactuators (contactors, solenoid valves, etc) for the signalling devices (indicator lamps, audible warnings, etc). Two widths are available, 9.5 and 17.5 mm, depending on the switched current.

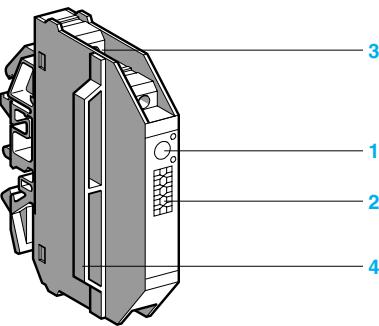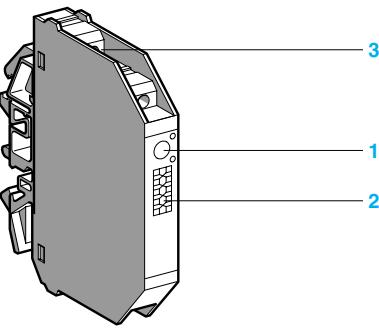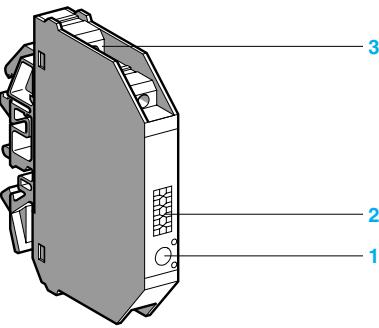

The 17.5 mm version includes a 9.5 mm interface and an integrated 8 mm spacer. This device can, with its increased ventilation, switch high levels of currents.

The front panel of the ABS-2 slim solid-state interface modules includes:

- 1 LED indicating the state of the control signal.
- 2 Channel identification : 5 individual characters for AB1-/G or one AB1-SA2 marker tag.
- 3 Connection by screw clamp terminal enabling easy attachment of 2 wires per terminal.

The layout of the connection terminals for both families (input and output) is designed for rational wiring and a clear separation between the incoming (processing) and outgoing (power and process control) circuits.

- 4 Integrated spacer.

Characteristics


Interfaces

For discrete signals


Slim solid-state interface modules

Examples of applications with PLCs

Interfacing PLC discrete inputs

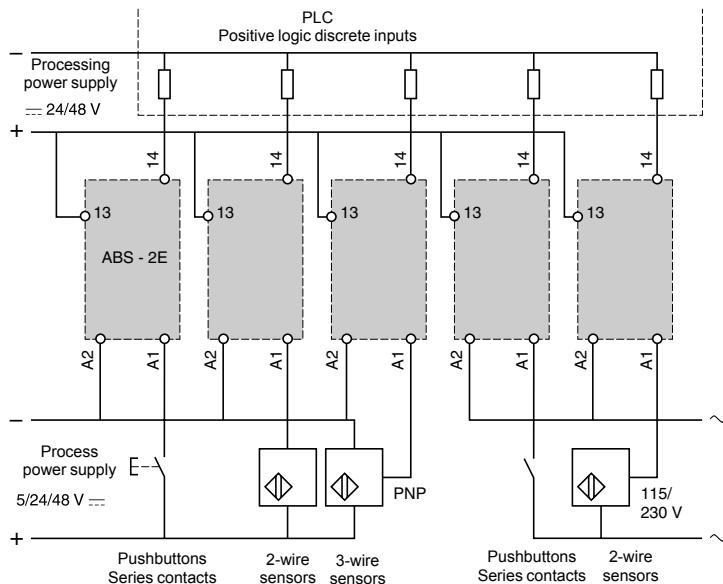

Interfacing PLC discrete outputs

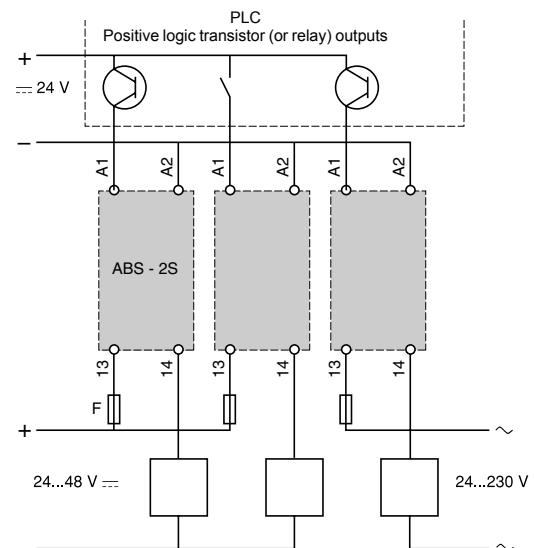

Environment

Conforming to standards	IEC 60947-1, UL 508, CSA C22.2 No. 14		
Product certifications	UL, CSA, BV, LROS, DNV		
Degree of protection	Conforming to IEC 529 (protection against direct contact)		
Protective treatment	“TC”		
Flame resistance	Conforming to IEC 695-2-1	Incandescent wire	°C 960
		Conforming to UL 94	V0
Shock resistance	Conforming to IEC 68-2-27	Semi-sinusoidal waves 11 ms	30 gn
Vibration resistance	Conforming to IEC 68-2-6	10...150 Hz	5 gn
Resistance to electrostatic discharges	Conforming to IEC 801-2	Level 3	kV 8
Resistance to electromagnetic fields	Conforming to IEC 801-3	Level 3 ; 27...1000 MHz	V/m 10
Resistance to rapid transients	Conforming to IEC 801-4 Level 3	On power supply	kV 2
		On I/O	kV 1
Resistance to shock waves	Conforming to IEC 947-1	Waveform 1.2/50 ms ; 0.5 J	kV 0.5 U < 50 V kV 1.5 U < 150 V kV 2.5 U < 300 V
Cross-sections which may be connected	Flexible wire with no cable end	1 or 2-wire	mm² 0.6...2.5
	Flexible wire with cable end	1 or 2-wire	mm² 0.34...2.5
	Rigid cable	1-wire	mm² 0.27...4
Operating position	Any		
Ambient air temperature around the device	Unrestricted operation	°C	- 5...+ 55
	Operation at Us	°C	- 25...+ 70
	Storage	°C	- 40...+ 80
Operating altitude	m ≤ 300		
Installation category	II		
Degree of pollution	2		
Mounting	Standard DIN rails		

Characteristics (continued)

Interfaces

For discrete signals

Slim solid-state interface modules

Control circuit characteristics (55°C ambient temperature)									
Type of interface			ABS 2EC01EA	ABS 2EC01EB	ABS 2EC01EE	ABS 2EA01EF	ABS 2EA02EF	ABS 2EA01EM	ABS 2EA02EM
Rated voltage Us	---	V	5	24	48	—	—	—	—
	~	V	—	—	—	115/127 50 Hz	120/127 60 Hz	230/240 50 Hz	230/240 60 Hz
Maximum voltage	---	V	Negative logic 6 (TTL)	28.8	57.6	—	—	—	—
	~	V	—	—	—	140	140	264	264
Maximum current at Us	---	mA	13.6	12	10.5	—	—	—	—
	~	mA	—	—	—	14	17	12.5	15
State 1	---	V	3.75	16.9	36	—	—	—	—
	---	mA	4.5	7.7	7.5	—	—	—	—
	~	V	—	—	—	86.3	90	173	173
	~	mA	—	—	—	8.4	9.7	7.9	9.3
State 0	---	V	2	5.6	10.8	—	—	—	—
	---	mA	0.09	2	2	—	—	—	—
	~	V	—	—	—	25.4	25.4	48	48
	~	mA	—	—	—	2.5	2.5	2.5	2.5
State 1 display			Yes	Yes	Yes	Yes	Yes	Yes	Yes
Internal protection reversed polarity			Yes	Yes	Yes	—	—	—	—
Output circuit characteristics									
Rated operating voltage Ue	---	V	5...48						
Min/max voltage	---	V	2/60						
Min/max current switched		mA	1/50						
Maximum residual current at state 0		mA	0.1						
Maximum volt drop at state 1		V	1						
Internal protection			Reversed polarity						
External protection			Against short-circuits for Ik ≤ 100 A (---) Quick-blow fuse, ref. : HA21 0.25 A or equivalent						
Other characteristics									
Type of interface			ABS 2EC01EA	ABS 2EC01EB	ABS 2EC01EE	ABS 2EA01EF	ABS 2EA02EF	ABS 2EA01EM	ABS 2EA02EM
Time delay characteristics	0 → 1	ms	0.05	0.05	0.05	10	10	10	10
	1 → 0	ms	0.4	0.4	0.4	20	20	20	20
Maximum switching rate		Hz	1000	1000	1000	25	25	25	25
	Duty cycle 50 % Ue ≤ 30 V le ≥ 5 mA		Conforming to IEC 947-1 : 300 V						
Rated insulation voltage			Conforming to VDE 0110 : 250 V group C						
	Insulation test voltage for 1 minute	I/O Wired interface/ground	kVrms	4					
			kVrms	2.5					

Characteristics (continued)

Interfaces

For discrete signals

Slim solid-state interface modules

Control circuit characteristics (55°C ambient temperature)					
Type of interface		ABS2SC01EB	ABS2SC02EB	ABS2SA01MB	ABS2SA02MB
Rated voltage Us	V	24		24	
Maximum voltage	V	28.8		28.8	
Maximum current at Us	mA	12		13.6	
State 1	V	16.9		16.9	
	mA	7.7		8.3	
State 0	V	5.6		5.3	
	mA	2		2	
State 1 display		Yes		Yes	
Internal protection reversed polarity		Yes		Yes	
Output circuit characteristics					
Rated operating voltage Ue	V	— 5...48	— 5...48	~ 24...240	~ 24...240
Maximum voltage	V	— 57.6	— 57.6	~ 264	~ 264
Maximum continuous current (Ith) (1)	A	2	3	2.3	3
at 40 °C					
Rated operating voltage (Ie)	A	DC12 1.5/0.9	2.5/2.2	AC12 1.9/0.5	2.1/1.5
Conforming to IEC 947-5-1	A	DC13 1.5/0.9	2.5/2.2	AC13 1.6/0.5	1.6/1.5
Single/touching product	A	DC14 0.6/0.6	0.6/0.6	AC14 1.6/0.5	1.6/1.5
at 55 °C vertical position	A	— — —	—	AC15 1/0.5	1/1
Minimum current	mA	1		10	
Maximum residual current	mA	1		2.5	
Maximum volt drop	V	1.5		3 (le ≥ 10 mA) 1.5 (le ≥ 100 mA)	
“0 crossing” voltage	V	—		50 peak	
Solid-state dV/dt	V/μs	—		500	
Internal protection			Reversed polarity		
External protection			Against short-circuits for Ik ≤ 1 kA (～) and ≤ 100 A (—) Quick-blow fuse with high breaking capacity: 3.15 A		
Other characteristics					
Maximum response time at le □ 10 mA	0 → 1 1 → 0	ms	0.05 0.6	10 (50 Hz); 8 (60Hz) 10 (50 Hz); 8 (60Hz)	
Maximum switching rate	At 55 °C ; at le: module alone duty cycle 40 %	Hz	DC13 6 6	AC13 0.6 0.7	
		Hz	DC14 1 3	AC14 0.6 0.7	
	On resistive load duty cycle 50 %	Hz	— — —	AC15 0.6 0.7	
Rated operating voltage		Hz	700	50	
Rated insulation voltage for 1 minute	I/O Wired interface/ground	kVrms	4 2.5	Conforming to IEC 947-1 : ≈ 300 V Conforming to VDE 0110 : 250 V group C	

(1) See temperature derating curves.

Solid-state input modules

Width mm	Input circuit		Output circuit		Sold in lots of	Catalog number	Weight kg
	Current	Nominal voltage	Current	Nominal voltage			
	V	V	A	V			
9.5	---	5	---	5...48	5	ABS2EC01EA	0.029
	24	---	---	5...48	5	ABS2EC01EB	0.029
	48	---	---	5...48	5	ABS2EC01EE	0.029
	~	115...127 (50 Hz)	---	5...48	5	ABS2EA01EF	0.032
		120...127 (60 Hz)	---	5...48	5	ABS2EA02EF	0.032
		230...240 (50 Hz)	---	5...48	5	ABS2EA01EM	0.033
		230...240 (60 Hz)	---	5...48	5	ABS2EA02EM	0.033

Solid-state output modules


Width mm	Input circuit		Output circuit		Sold in lots of	Catalog number	Weight kg
	Current	Nominal voltage	Current	Nominal voltage			
	V	A	V	V			
9.5	---	24	---	2	5	ABS2SC01EB	0.034
	~	2.3	---	24...48	5	ABS2SA01MB	0.034
			---	24...230	1	ABS2SC02EB	0.043
17.5	---	24	---	3	1	ABS2SA02MB	0.044
			~ 3	24...230			

Accessories


For connecting commons, use ABFC08●●● flexible combs (Please consult your Regional Sales Offices).

Temperature derating curve for solid-state output modules $U_c = U_s = \dots 24 V$


ABS2SC01EB d.c.




ABS2SC02EB d.c.




ABS2SA01MB a.c.



ABS2SA02MB a.c.




- 1 Vertical module alone or adjacent to modules with low heat dissipation.



- 3 Vertical module mounted with 2 modules with identical heat dissipation on both sides.


- 2 Horizontal module alone or adjacent to modules with low heat dissipation.




- 4 Horizontal module mounted with 2 modules with identical heat dissipation on both sides.

Dimensions (mm):

ABS2E/ABS 2S•01••

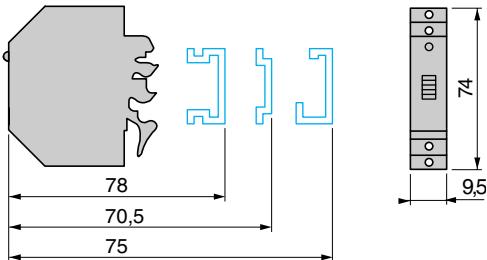


ABS2S•02••

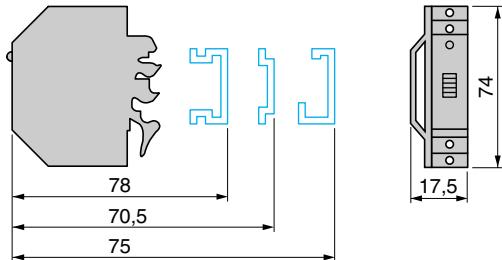


Circuit diagrams

Solid-state input modules


ABS2EC••••



ABS2EA•••••




ABS2E•••••

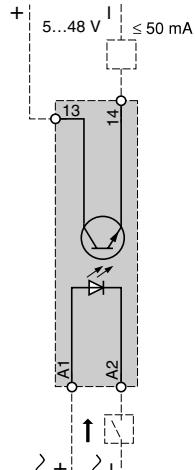


Solid-state output modules


ABS2SC0•EB




ABS2SA0•MB



ABS2SC0•EB

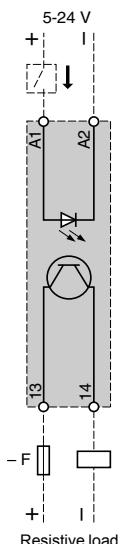

ABS2SA0•MB

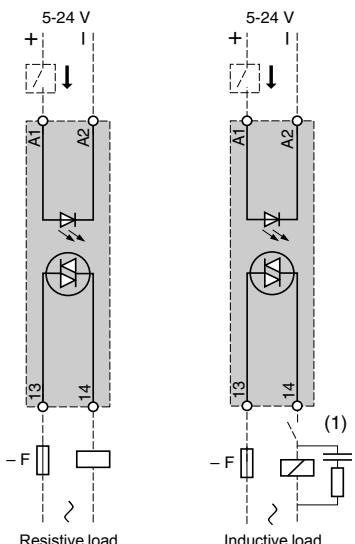

F: fuse DF1 SS133.2

(1) or peak limiter

Applications**Panel mounted****Contact type**

1 N/O SPST contact

Control voltage ranges \sim
—90...280 V
3...32 V, 3.5...32 V**Operating voltages** \sim
—24...280 V, 48...530 V, 48...660 V
0...100 V**Type of switching** \sim
—Zero voltage switching
DC switching**Current** \sim
—10, 25, 50, 75, 90, 125 A
12, 25, 40**Degree of protection**

IP20

LED indication

Yes

Cooling

Thermal protection or with heat sink accessory

Solid state relay type**SSRP****Page**

76

DIN rail mounted



1 N/O SPST contact

90...280 V	90...140 V
4...32 V	3...32 V

24...280 V

Zero voltage switching

10, 20, 30 A	45 A
--------------	------

IP20

Yes

Built-in heat sink

SSRD

Introduction

The SSR solid state relay range includes:

- relays for panel mounting: **SSRP**.
- relays for DIN rail mounting: **SSRD**.



Description

SSRP relays for panel mounting

- 1 2 x Ø 4.9 holes for mounting.
- 2 Connection terminals.
- 3 Connection terminal screws.
- 4 Input voltage indicator LED, green.
- 5 Thermal interface which must be via the back of the product.



SSRD relays for DIN rail mounting

- 1 Lugs for plate mounting.
- 2 Built-in heat sink.
- 3 Connection terminals.
- 4 Connection terminal screws.
- 5 Input voltage indicator LED, green.
- 6 Bracket for mounting on 35 mm DIN rail.

General characteristics

SSRP solid state relays, panel mounting

Product certifications	UR E258297, CSA LR 40787, IEC 60950-1, IEC 62314	
Product marking	CE	
Ambient air temperature around the device	Storage	°C -40...+ 80
	Operation	°C -40...+ 125
Encapsulation	Thermally conductive epoxy	
Degree of protection	IP20 (with cover), IP00 (without cover)	
Terminal screw torque	Nm	Inputs: 1.1 (screw: Ø 3.5 / length 6 mm) Outputs: 2.2 (screw: Ø 4 / length 7.4 mm)

SSRD solid state relay, DIN rail mounting

Product certifications	UR E258297, CSA LR 40787, IEC 60950-1, IEC 62314	
Product marking	CE	
Ambient air temperature around the device	Storage	°C -40...+ 80
	Operation	°C -40...+ 125
Encapsulation	Thermally conductive epoxy	
Degree of protection	IP20	
Terminal screw torque	10...30 A relays	Inputs: 0.6...0.7 / Outputs: 0.6...0.7
	45 A relays	Nm Inputs: 0.6...0.7 / Outputs: 1.1...1.7
Max. wire size	10...30 A relays	Inputs: 5.3 mm ² - AWG 10 / Outputs: 5.3 mm ² - AWG 10
	45 A relays	Inputs: 3.3 mm ² - AWG 12 / Outputs: 8.4 mm ² - AWG 8

Characteristics (continued)

Zelio® Solid State Relays

SSR solid state relays

Panel mounting

SSRP solid state relays, panel mounting

Relay type	SCR output, Zero voltage switching	SSRPCDS10A1	SSRPCDS25A1	SSRPCDS50A1
Input specification				
Control voltage range	---V	3...32	3...32	3...32
Maximum turn-on voltage	---V	3	3	3
Maximum turn-off voltage	---V	1.0	1.0	1.0
Maximum typical input current	mA	10 at --- 12 V	10 at --- 12 V	10 at --- 12 V
Output specification				
Operating voltage	~V	24...280	24...280	24...280
Load current range	A	0.15 ...10	0.15...25	0.15...50
Transient overvoltage	Vpk	600	600	600
Maximum surge current (16.6 ms)	Apk	120	250	625
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6
Thermal resistance junction to base plate	°C/W	1.48	1.02	0.63
Maximum I ² t for fusing (8.3 ms)	A ² sec	60	260	1620
Maximum off-state leakage current at rated voltage	mA	1.0	1.0	1.0
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	Cycle	1/2	1/2	1/2
Maximum turn-off time	Cycle	1/2	1/2	1/2
Relay type	SCR output, Zero voltage switching	SSRPCDS75A2	SSRPCDS90A3	SSRPCDS125A3
Input specification				
Control voltage range	---V	3...32	3...32	3...32
Maximum turn-on voltage	---V	3	3	3
Maximum turn-off voltage	---V	1.0	1.0	1.0
Typical input current	mA	10 at --- 12 V	10 at --- 12 V	10 at --- 12 V
Output specification				
Operating voltage	~V	48...530	48...660	48...660
Load current range	A	0.15...75	0.25...90	0.25...125
Transient overvoltage	Vpk	1200	1200	1200
Maximum surge current (16.6 ms)	Apk	1110	1350	2000
Maximum On-state voltage drop at rated current	Vrms	1.6	1.7	1.7
Thermal resistance junction to base plate	°C/W	0.31	0.28	0.22
Maximum I ² t for fusing (8.3 ms)	A ² sec	4150	6000	12 700
Maximum off-state leakage current at rated voltage	mA	1.0	1.0	1.0
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	Cycle	1/2	1/2	1/2
Maximum turn-off time	Cycle	1/2	1/2	1/2
Relay type	SCR output, Zero voltage switching	SSRPP8S10A1	SSRPP8S25A1	SSRPP8S50A1
Input specification				
Operating voltage	~V	90...280	90...280	90...280
Maximum turn-on voltage	Vrms	90	90	90
Maximum turn-off voltage	Vrms	10	10	10
Typical input current	mA	6 at 120 Vrms	6 at 120 Vrms	6 at 120 Vrms
Output specification				
Operating voltage	~V	24...280	24...280	24...280
Load current range	A	0.15...10	0.15...25	0.15...50
Transient overvoltage	Vpk	600	600	600
Maximum surge current (16.6 ms)	Apk	400	600	850
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6
Thermal resistance junction to base plate	°C/W	1.48	1.02	0.63
Maximum I ² t for fusing (8.3 ms)	A ² sec	60	260	1620
Maximum off-state leakage current at rated voltage	mA	10 max.	10 max	10 max
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	ms	10 max.	10 max.	10 max.
Maximum turn-off time	ms	40 max.	40 max.	40 max.
Relay type	Mosfet output	SSRPCDM12D5	SSRPCDM25D5	SSRPCDM40D5
Input specification				
Control voltage range (input voltage)	---V	3.5...32	3.5...32	3.5...32
Maximum turn-on voltage	---V	3.5	3.5	3.5
Maximum turn-off voltage	---V	1.0	1.0	1.0
Typical input current	mA	1.6 (--- 5 V), 28 (--- 32 V)	1.6 (--- 5 V), 28 (--- 32 V)	1.6 (--- 5 V), 28 (--- 32 V)
Output specification				
Control voltage range	---V	0...100	0...100	0...100
Load current range	A	12	25	40
Minimum load current	mA	0	0	0
Maximum surge current (16.6 ms)	Apk	28	51	106
Maximum On-state voltage drop at rated current	Vpk	1.6	2.1	2.1
Thermal resistance junction to base plate	°C/W	1.34	0.83	0.83
Maximum off-state leakage current at rated voltage	mA	0.2	0.3	0.3
On-state resistance	Ω	0.13	0.05	0.05
Maximum turn-on time	μsec	100	100	100
Maximum turn-off time	msec	1.0	1.0	1.0

Zelio® Solid State Relays

SSR solid state relays

Panel mounting (continued)

DIN rail mounting

SSRP solid state relays, panel mounting (continued)

Relay type	SCR output, Zero voltage switching	SSRPP8S75A2	SSRPP8S90A3	SSRPP8S125A3
Input specification				
Operating voltage	~ V	90...280	90...280	90...280
Maximum turn-on voltage	Vrms	90	90	90
Maximum turn-off voltage	Vrms	10	10	10
Typical input current	mA	6 at 120 Vrms	6 at 120 Vrms	6 at 120 Vrms
Output specification				
Operating voltage	~ V	48...530	48...660	48...660
Load current range	A	0.15...75	0.25...90	0.25...125
Transient overvoltage	Vpk	1200	1200	1200
Maximum surge current (16.6 ms)	Apk	1110	1350	2000
Maximum On-state voltage drop at rated current	Vrms	1.6	1.7	1.7
Thermal resistance junction to base plate	°C/W	0.31	0.28	0.22
Maximum I ² t for fusing (8.3 ms)	A ² sec	4150	6000	12 700
Maximum off-state leakage current at rated voltage	mA	10 max.	5 max.	5 max.
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500
Maximum turn-on time	ms	10 max.	10 max.	10 max.
Maximum turn-off time	ms	40 max.	40 max.	40 max.

SSRD solid state relay, DIN rail mounting

Relay type	SCR output, Zero voltage switching	SSRDP8S10A1	SSRDP8S20A1	SSRDP8S30A1	SSRDF8S45A1
Input specification					
Operating voltage	~ V	90...280	90...280	90...280	90...140
Maximum turn-on voltage	Vrms	90	90	90	90
Maximum turn-off voltage	Vrms	10	10	10	10
Typical input current	mA	2 (120 Vrms), 4 (240 Vrms)	2 (120 Vrms), 4 (240 Vrms)	2 (120 Vrms), 4 (240 Vrms)	15 (120 Vrms)
Output specification					
Operating voltage	~ V	24...280	24...280	24...280	24...280
Load current range	A	10	20	30	45
Transient overvoltage	Vpk	600	600	600	600
Maximum surge current (16.6 ms)	Apk	120	250	625	625
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6	1.6
Maximum I ² t for fusing (8.3 ms)	A ² sec	60	260	1620	1620
Maximum off-state leakage current at rated voltage	mA	10	10	10	10
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500	500
Maximum turn-on time	ms	10 max.	10 max.	10 max.	10 max.
Maximum turn-off time	ms	40 max.	40 max.	40 max.	40 max.
Relay type	SCR output, Zero voltage switching	SSRDCDS10A1	SSRDCDS20A1	SSRDCDS30A1	SSRDCDS45A1
Input specification					
Control voltage range	--- V	4...32	4...32	4...32	3...32
Maximum turn-on voltage	--- V	4.0	4.0	4.0	4.0
Maximum turn-off voltage	--- V	1.0	1.0	1.0	1.0
Typical input current	mA	8...12	8...12	8...12	17
Output specification					
Operating voltage	~ V	24...280	24...280	24...280	24...280
Load current range	A	10	20	30	45
Transient overvoltage	Vpk	600	600	600	600
Maximum surge current (16.6 ms)	Apk	120	250	625	625
Maximum On-state voltage drop at rated current	Vrms	1.6	1.6	1.6	1.6
Maximum I ² t for fusing (8.3 ms)	A ² sec	60	260	1620	1620
Maximum off-state leakage current at rated voltage	mA	10	10	10	10
Minimum off-state dv/dt at maximum rated voltage	V/μsec	500	500	500	500
Maximum turn-on time	Cycle	1/2	1/2	1/2	1/2
Maximum turn-off time	Cycle	1/2	1/2	1/2	1/2



SSR PCDS25A1



SSR DCDS10A1



SSR DCDS45A1



SSR AH1



SSR AT1

Solid state relays, 1 N/O SPST contact

■ Panel mounting

Switching	Voltage range Input	Voltage range Output	Load current range	Catalog numbers	Weight kg
	V	V	A		
SCR output					
Zero voltage switching	—3...32	~24...280	10	SSRPCDS10A1	0.113
			25	SSRPCDS25A1	0.113
			50	SSRPCDS50A1	0.113
		~48...530	75	SSRPCDS75A2	0.113
		~48...660	90	SSRPCDS90A3	0.113
			125	SSRPCDS125A3	0.113
	~90...280	~24...280	10	SSRPP8S10A1	0.113
			25	SSRPP8S25A1	0.113
			50	SSRPP8S10A1	0.113
	~48...530	75	90	SSRPP8S75A2	0.113
	~48...660	90	125	SSRPP8S90A3	0.113
				SSRPP8S125A3	0.113

Mosfet output

DC switching	—3.5...32	—0...100	12	SSRPCDM12D5	0.113
			25	SSRPCDM25D5	0.113
			40	SSRPCDM40D5	0.113

■ DIN rail mounting

SCR output					
Zero voltage switching	~90...280	~24...280	10	SSRDP8S10A1	0.272
			20	SSRDP8S20A1	0.272
			30	SSRDP8S30A1	0.272
	~90...140	~24...280	45	SSRDF8S45A1	0.482
	—4...32	~24...280	10	SSRDCDS10A1	0.272
			20	SSRDCDS20A1	0.272
			30	SSRDCDS30A1	0.272
	—3...32	~24...280	45	SSRDCDS45A1	0.482

Accessories for panel mounted relays

Description	For use with 10...50A relays (1)	Catalog numbers	Weight kg
Heat sink	SSR PP8S•••••, SSR PCDS•••••, SSR PCDM•••••	SSRAH1	0.487
Thermal interface Sold in lots of 10	SSR PP8S•••••, SSR PCDS•••••, SSR PCDM•••••	SSRAT1	0.011


(1) for load current range 75, 90 and 125 A relays, please contact your Customer Care Center.

Solid state relays, 1 N/O SPST contact

■ Panel mounting



Solid state relays SSRP

Thermal interface SSRAT1

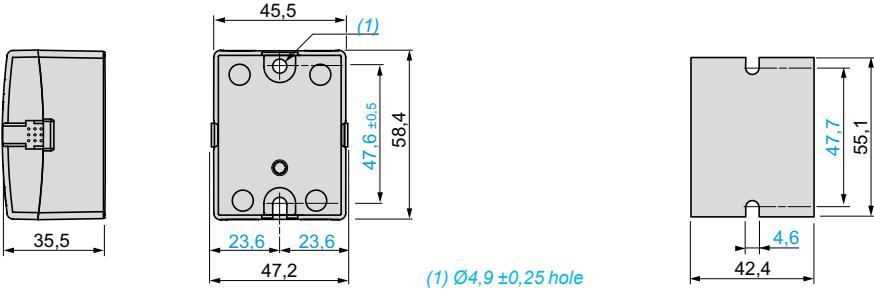

Heat sink SSRAH1


Heat sink dissipation curve

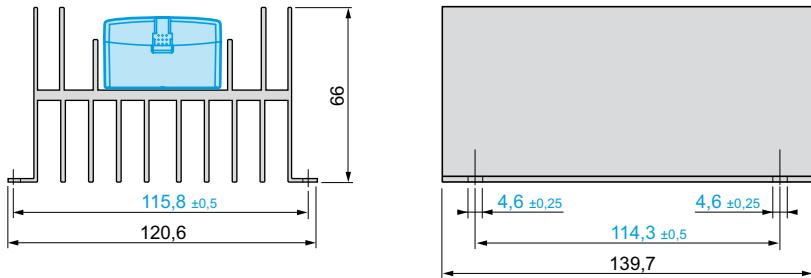

■ DIN rail mounting

10...30 A relays

45 A relays

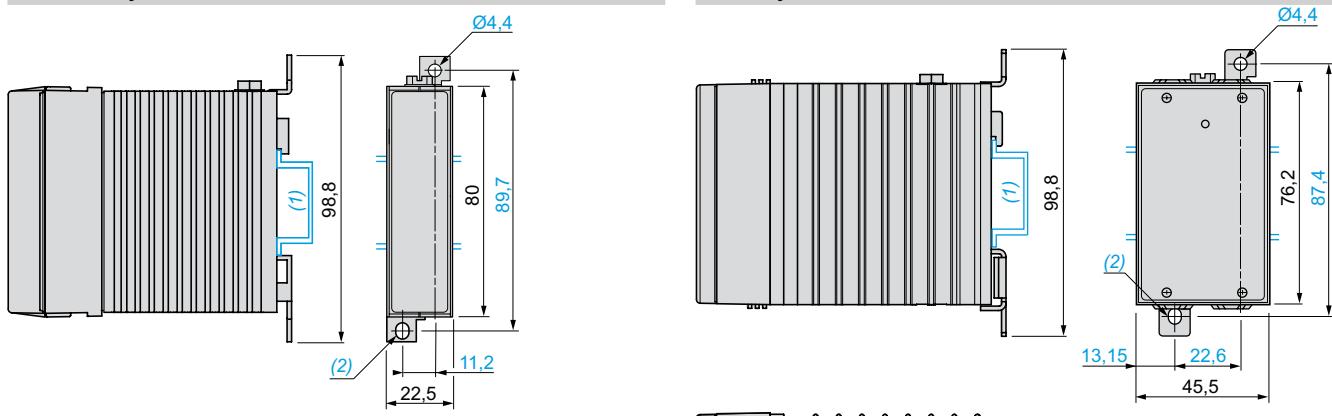

(1) 35 mm DIN rail. (2) Ø 4,4 x 5,5 elongated hole

(1) 35 mm DIN rail. (2) Ø 4,4 x 5,5 elongated hole

Introduction:
page 76

Characteristics:
pages 76 to 78

Product selector:
page 79

Dimensions:
page 80


Curves:
pages 80 and 81

Thermal derating curves

■ Panel mounting SSRP relays

□ SCR output


10 A relays

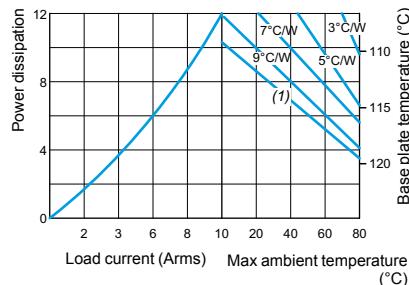

(1) No heat sink


25 A relays

25 A relays

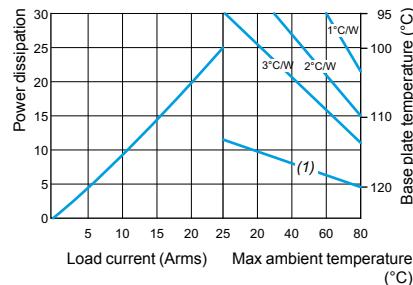


(1) No heat sink

50 A relays

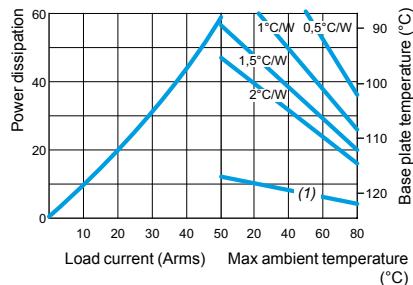


(1) No heat sink

75 A relays

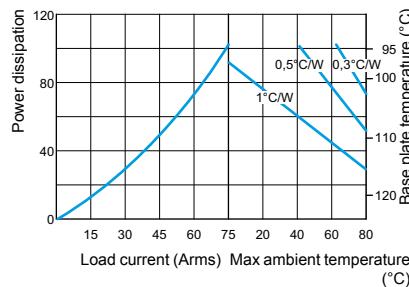


90 A relays

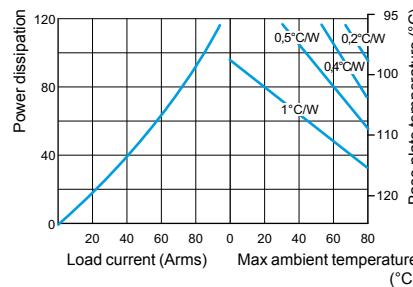


(1) No heat sink

125 A relays

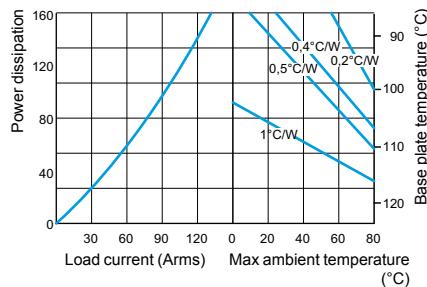


□ Mosfet output

12 A relays

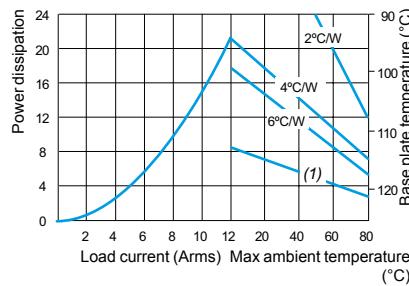

(1) No heat sink


25 and 40 A relays

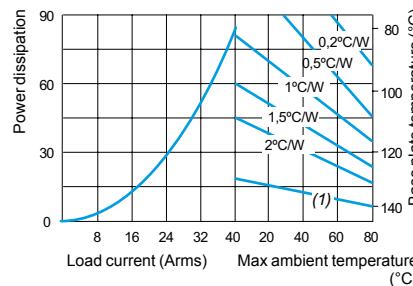

(1) No heat sink

■ ┴ Rail mounting SSRD relays

10...45 A relays

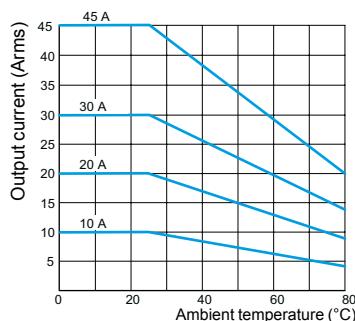

Schneider Electric USA Inc.

8001 Knightdale Blvd.
Knightdale, NC 27545
Tel: 919-266-3671

19 Waterman Avenue
Toronto, Ontario M4B 1Y2
Tel: 416-752-8020

<http://www.schneider-electric.us/>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Please note: not all parts listed in this catalog are available in all countries.

Design: Schneider Electric
Photos: Schneider Electric



2010

Electromechanical and solid-state Zelio[®] Relays

Schneider
Electric