




Rear Wheel Socket

8534M



- 4 points
- DIN 3121




KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
853417M	17	38.0	54	23.5	76	628	1	24
853419M	19	43.0	54	23.5	76	682	1	24
853421M	21	47.0	54	23.5	76	733	1	24

8545M


- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan



Use for

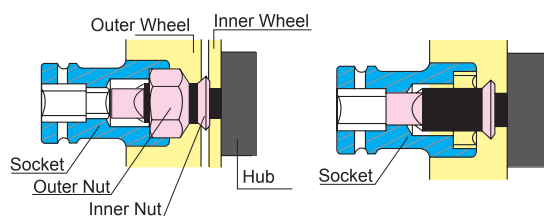

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	SQ	mm	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
85451735M	17 x 35	54	54	13	83	1042	1	24	
85451941M	19 x 41	55	54	14	87	985	1	24	
85452038M	20 x 38	58	54	14	83	1099	1	24	
85452041M	20 x 41	58	54	14	87	1086	1	24	
85452141M	21 x 41	58	54	14	87	1071	1	24	

Impact Bit Socket

8015M


- Hexagon head
- DIN 3121



KT NO.	mm	L mm	g	g	g
801519M	H19	75	860	1	24

1954

809622M



- Hex bit & bit holder
- DIN 3121



1954




809622M

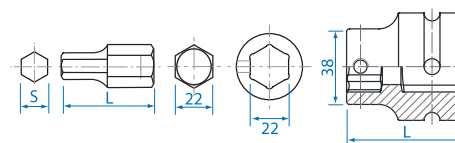

KT NO.	S mm	L mm	Max. torq Nm	g	g	g
195419H	H19	54.5	1577	140	12	120
195422H	H22	54.5	2436	162	12	120
195424H	H24	54.5	2436	176	10	100
195427H	H27	54.5	2436	200	10	100
195430H	H30	54.5	2436	232	6	60
195432H	H32	54.5	2436	243	6	60
809622M	22	58.0	-	756	1	24

809622MxxH


- Hexagon head
- DIN 3121



KT NO.	S mm	mm	L (mm)	Max. torq Nm	g	g	g
809622M19H	H19	22	93	1577	896	1	10
809622M22H	H22	22	93	2436	918	1	10
809622M24H	H24	22	93	2436	932	1	10
809622M27H	H27	22	93	2436	956	1	10
809622M30H	H30	22	93	2436	988	1	10
809622M32H	H32	22	93	2436	999	1	10