

DSMAX LASER DISPLACEMENT SENSOR


DSMax™ is the fastest and highest definition laser line 3D displacement sensor on the market for acquiring images and inspecting products in 3D. It is the only sensor that offers both high scan rates (up to 18 kHz) at full measurement range and maximum resolution images (2,000 profile points). The accurate, single shot high dynamic range (HDR) image is ideal for measuring and inspecting very small parts, such as electronic components, which can contain highly reflective or dark features.

DSMax includes telecentric optics for optimal image formation and shadow reduction. Combining speed and resolution makes DSMax a unique solution for obtaining fast, accurate 3D images of small, detailed parts.



Benefits at a glance


- Up to 18 kHz full field scan rate to maximize throughput
- 2,000 profile points within 31-mm FOV increases accuracy
- High speed and high sensitivity imager optimized to green laser shortens exposure for faster cycle times
- Telecentric optics accurately detects and locates small objects
- Cognex exclusive compressive sensing technology enables scans at maximum resolution and scan rate
- Factory calibrated to deliver results in real-world units of measurement

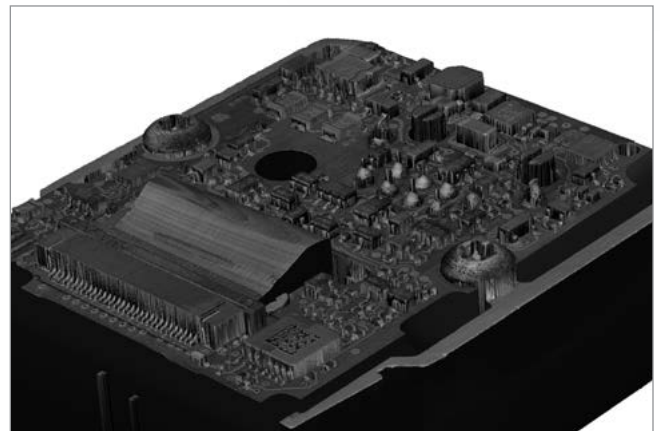

Accurate 3D inspections of small, detailed parts

DSMax concentrates 2,000 profile points within just a 31-mm field of view (FOV). The higher the number of profile points spread across a field of view reveals more details about the part and increases the precision of the 3D image allowing for more accurate 3D inspections.

Specifications	Values (mm)
Near Field of View (FOV)	30
Far Field of View (FOV)	31.5
Clearance Distance (CD)	51.4
Measurement Range (MR)	10.9

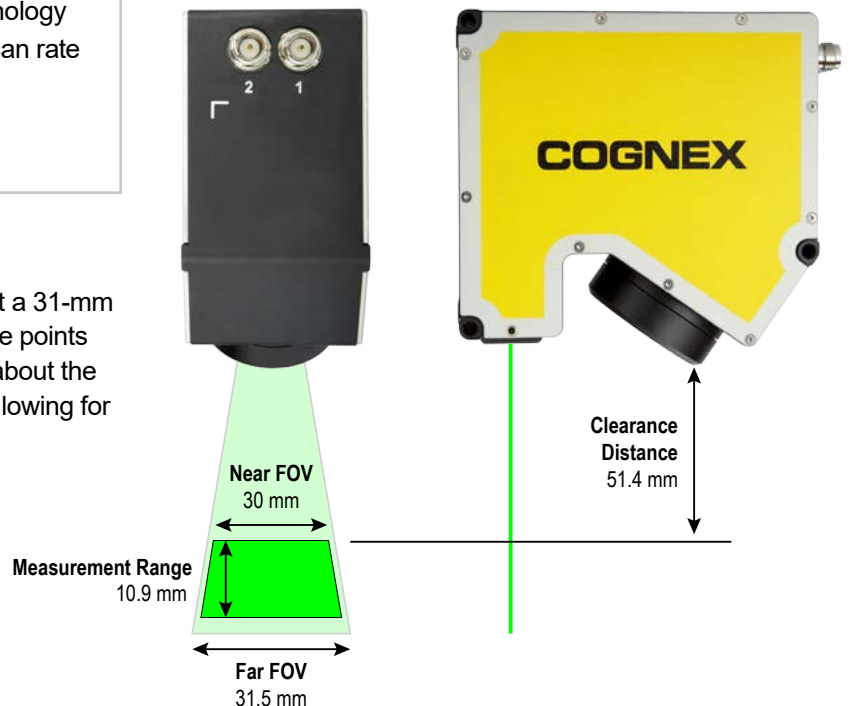


Short cycle times increase throughput

DSMax acquires high resolution 3D images 5X faster than other displacement sensors on the market. DSMax uses a high-speed imager, high-speed compressive sensing technology, and the CoaXPress® protocol to achieve up to 18 kHz (full field) scan rates at maximum resolution that reduce cycles times and maximize throughput.

Telecentric optics optimizes image formation

DSMax is equipped with a telecentric lens which reduces shadows and delivers high-contrast images. It achieves this by directing the laser line straight down on the object reducing the amount of light reflected away from the lens and increasing the light reflected back to the imager. Telecentric optics are ideal for precise measurements, where accuracy, repeatability, and throughput are necessary to solve the application.

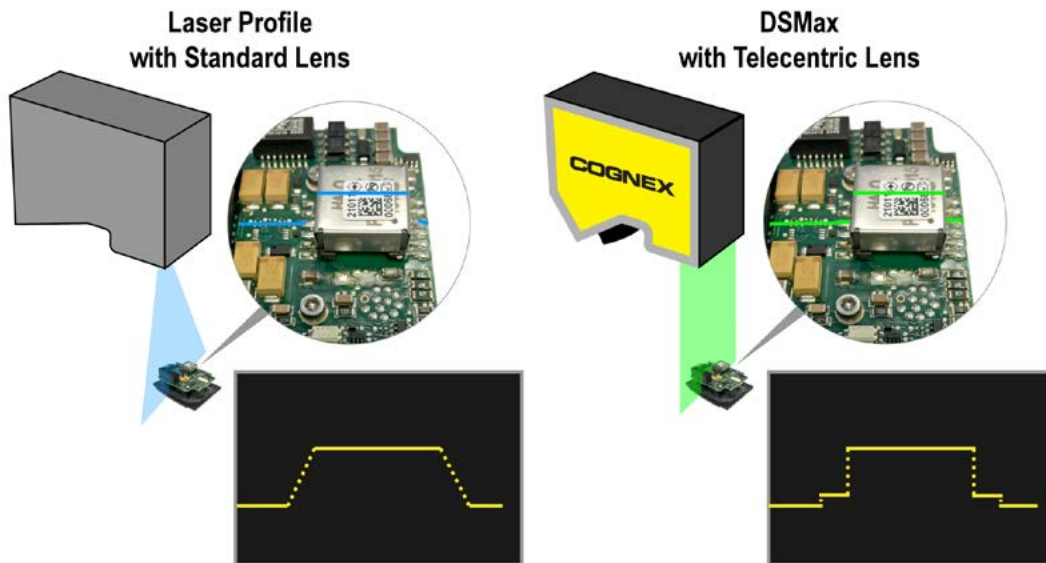

Fast High Dynamic Range (HDR)

DSMax acquires images with a single shot HDR reducing noise in the image and improving accuracy. HDR prevents DSMax from being affected by bright or highly reflective features on the part, delivering an optimized image for machine vision inspection.

DSMax with Telecentric Lens and HDR




Without HDR



Reliable vision tools for accurate inspections

DSMax comes equipped with Cognex well-known and respected VisionPro® 3D toolset for object location, measurement, and inspection. The Cognex Designer integrated development environment simplifies application set up and reduces deployment time.

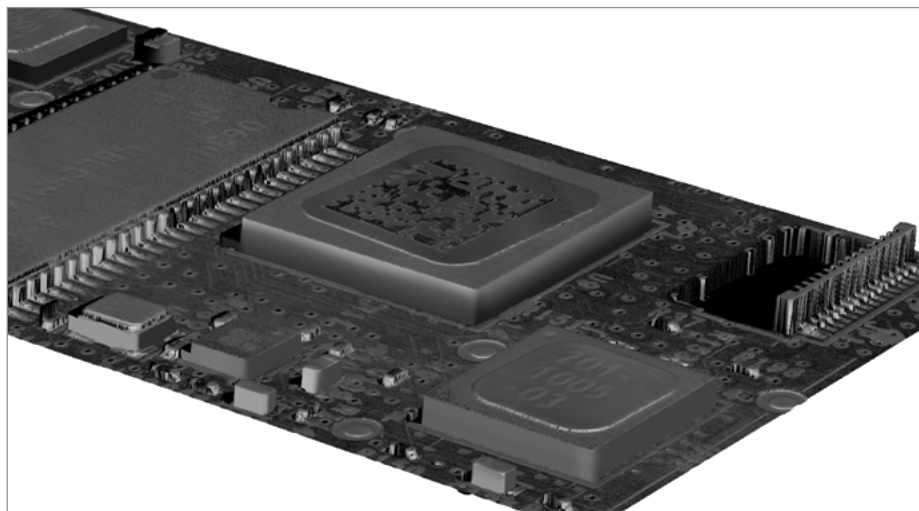

SPECIFICATIONS

Model	DSMax CX 31 mm Telecentric	Maximum humidity	85% (non-condensing)
Laser class	2M	Environmental	IP67
Laser wavelength	520 nm	Power supply requirements	Voltage: +24 VDC (11–30 VDC) Current: 300 mA max Power: 8 W
Laser output	35 mW max.	Working distance	51.4–62.3 mm
Laser maximum total power	< 40 mW	Network communications	Coaxial interface implementing the CoaXPress protocol.
Scan rate	Up to 18 kHz	Shock	Up to 50 G
Profile points	2,000	Vibration	Up to 2 G (10–500 Hz for 30 min.)
Linearity	±0.1% of F.S.	Certifications	CE, KCC, FDA (laser); CAN/CSA C22.2 No. 61010-1, UL 61010-1, EN 61010-1; EN 61326-1:2013
X resolution	Top: 0.0146 mm Bottom: 0.0154 mm	Frame grabber trigger	Input voltage limits: Trig+ - Trig - = ±24 VDC Input ON: > 6 VDC Input OFF: < 2.5 VDC
Y resolution*	0.015 mm	Frame grabber encoder input specifications	Differential: A+/B+: 5-24V (500 kHz max) A-/B-: Inverted (A+/B+) Single Ended: A+/B+: 5-24V (500 kHz max) A-/B-: VDC = ½ (A+/B+)
Z resolution**	Top: 0.0025 mm Bottom: 0.0028 mm		
Dimensions	142.7 (L) x 65 (w) x 133.4 (H) mm		
Weight	843 g		
Case temperature	0 °C to 50 °C		
Storage temperature	-10 °C to 60 °C		

* size of pixel in y

** size of subpixel in z

COGNEX

Companies around the world rely on Cognex vision and barcode reading solutions to optimize quality, drive down costs and control traceability.

Corporate Headquarters One Vision Drive Natick, MA 01760 USA

Regional Sales Offices

Americas

North America +1 844-999-2469
Brazil +55 (11) 2626 7301
Mexico +01 800 733 4116

Europe

Austria +49 721 958 8052
Belgium +32 289 370 75
France +33 1 7654 9318
Germany +49 721 958 8052

Hungary +36 800 80291
Ireland +44 121 29 65 163
Italy +39 02 3057 8196
Netherlands +31 207 941 398
Poland +48 717 121 086
Spain +34 93 299 28 14
Sweden +46 21 14 55 88
Switzerland +41 445 788 877
Turkey +90 216 900 1696
United Kingdom +44 121 29 65 163

Asia

China +86 21 6208 1133
India +9120 4014 7840
Japan +81 3 5977 5400
Korea +82 2 539 9980
Malaysia +6019 916 5532
Singapore +65 632 55 700
Taiwan +886 3 578 0060
Thailand +66 88 7978924
Vietnam +84 2444 583358

© Copyright 2019, Cognex Corporation. All information in this document is subject to change without notice. All Rights Reserved. Cognex and VisionPro are registered trademarks of Cognex Corporation. DSMax is a trademark of Cognex Corporation. All other trademarks are property of their respective owners. Lit. No. DS-MaxDSEN-11-2019

www.cognex.com