


# Calipers

An industry standard measuring tool

## ABSOLUTE Coolant Proof Carbon Fiber Caliper SERIES 552 - with Interchangeable Jaws

**MeasurLink<sup>1</sup> ENABLED**  
Data Management Software by Mitutoyo

- IP66 Absolute Digital Caliper (Refer to page D-6 for a description of Absolute measurement.)
- The range of applications can be expanded by using interchangeable jaws (optional).
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. (Refer to page A-3.)
- The PRESET function enables quick and easy scale resetting to match the jaws when they are changed.

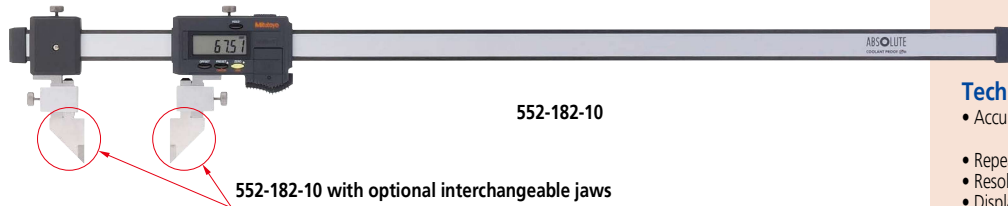

### SPECIFICATIONS

Metric			Inch / Metric		
Order No.	Range (mm)	Accuracy (mm)	Order No.	Range (in)	Accuracy (in)
552-181-10	0 - 450	±0.04	552-191-10	0 - 18	±0.002
552-182-10	0 - 600		552-192-10	0 - 24	
552-183-10	0 - 1000	±0.05	552-193-10	0 - 40	±0.004
552-184-10	0 - 1500	±0.09	552-194-10	0 - 60	
552-185-10	0 - 2000	±0.12	552-195-10	0 - 80	±0.005

Note: A constant-force mechanism is used in the finger rest; however, this is only an auxiliary mechanism to avoid measurement error caused by excessive measuring force. To measure with good accuracy, use the minimum necessary measuring force for the caliper measuring faces to make sufficient contact with the workpiece. Refer to page D-40 for details.

**MeasurLink<sup>1</sup> ENABLED**  
Data Management Software by Mitutoyo

Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink (refer to page A-5 for details).

**ABSOLUTE<sup>TM</sup>**

**IP66**



www.tuv.com  
ID: 000002252


### Technical Data

- Accuracy: Refer to the list of specifications. (excluding quantizing error)
- Repeatability: 0.01 mm
- Resolution: 0.01 mm or 0.0005 in / 0.01 mm
- Display: LCD
- Scale type: ABSOLUTE electromagnetic induction linear encoder
- Max. response speed: Unlimited
- Battery: SR44 (1 pc), **938882**, for initial operational checks (standard accessory)
- Battery life: Approx. 5,000 hours in continuous use
- Dust/Water protection level: IP66 (IEC 60529)\*
- Standard accessory: Jaw clamps (2 pcs.), 05GZA033
- \* Rustproofing shall be applied after use if caliper was in contact with coolant.

### Functions

- Zero-setting
- Data hold
- Offsetting
- Presetting
- Data output
- Low-power and low-voltage alert
- Counting value composition error
- Automatic power on/off, inch/mm reading (inch/mm models)

### Standard Accessories (2 pcs.)



Jaw clamps: 05GZA033

### Optional Accessories

For details, refer to page A-27.

- Connecting cables for **IT / DP / MUX**
- 05CZA624**: SPC cable with data button (1 m)
- 05CZA625**: SPC cable with data button (2 m)



- USB Input Tool Direct
- 06AFM380A**: SPC cable for **USB-ITN-A** (2 m)
- Connecting cables for **U-WAVE-T**
- 02AZD790A**: SPC cable with data button (160 mm)
- 02AZE140A**: SPC cable for foot switch

