





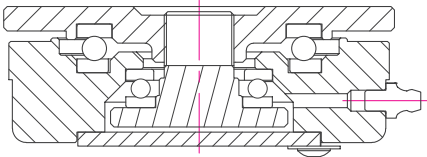
Guide for selection of wheels : AGV casters

Image	Series	Description	Wheel code	Wheel dia mm	Wheel width mm	Axle bore mm	Hub length mm	Load capacity Kg	Bearing type
	HUD	<ul style="list-style-type: none"> – Cast polyurethane (Shore A90) – Aluminum core – Two ball bearings 	HUD-75-30	75	30	8	30	100	608 ZZ
			HUD-75-23	75	23	15	23	100	6202 ZZ
	HUD	<ul style="list-style-type: none"> – Cast polyurethane (Shore A95) – Aluminum core – Two ball bearings 	HUD-75-48	75	48	15	51	200	6202 ZZ
			HUD-75-30	75	30	15	30	125	6202 ZZ
	HUD	<ul style="list-style-type: none"> – Cast polyurethane (Shore A95) – Steel core – Two ball bearings 	HUD-100-30	100	30	15	30	155	6202 ZZ
			HUD-125-35	125	35	15	35	220	6202 ZZ
			HUD-150-40	150	40	15	40	315	6202 ZZ
	NUD	<ul style="list-style-type: none"> – Cast polyurethane (Shore A95) – Steel core – Two ball bearings 	NUD-75-30	75	30	15	30	125	6202 ZZ
			NUD-100-30	100	30	15	30	155	6202 ZZ
			NUD-125-35	125	35	15	35	220	6202 ZZ
			NUD-150-40	150	40	15	40	315	6202 ZZ

AGV casters

GXTS series

kg 400kg **RoHS** **-10~90°C**



Brackets: Steel plate, double thrust bearing in the swivel head to optimize heavy load, grease nipple, strong welded frame, minute shock absorption function and constant contact function to the floor with special rubber, bolted wheel axle structure

Surface Treatment: Powder coating, zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Wheel type	mm	mm	Kg	mm	mm	mm	mm	mm
GXTS-100-ASF	HUQ	100	50	400	169-14	35~39	112x112	88x88	9

Options



Product movie

Code Suffix	HUQ								
Description	Cast PU(A95)								
Available for	100								