

# 2-Color Display Digital Pressure Switch

Series **ZSE80(F)/ISE80(H)**



ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
ZSE
ISE
ZSP
PS
ISA2
PSE
IS
ISG
ZSM1

## Stainless diaphragm

Oil-free (Single-layer diaphragm structure)

Sensor unit: **Stainless steel 630**

Fitting parts: **Stainless steel 304**

The sensor unit and fitting parts are also applicable to stainless steel 316L.

**IP65 compliant**




## 2-color display

See abnormal values at a glance.




## 3-step setting

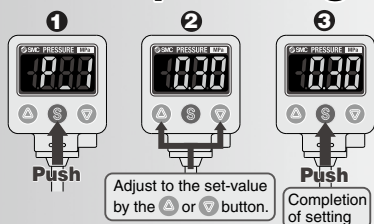


## Choice of 2 piping directions

Rear ported



Bottom ported



## Rated pressure range

0.0 to -101.0 kPa and -0.100 to 2.00 MPa  
available as standard

# Leakage


$1 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$

<VCR® and Swagelok®-fitting compliant>

$1 \times 10^{-5} \text{ Pa} \cdot \text{m}^3/\text{s}$

<Threaded type (R, Rc, NPT, G)>

- Sensor and fitting parts are electron-beam welded.
- Choice of VCR® or Swagelok® fitting is available.




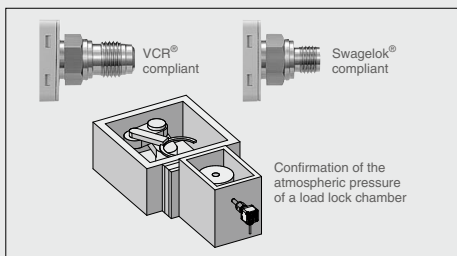


\* VCR® and Swagelok® are registered trademarks of Swagelok Company.

# Applicable Fluid Examples

- Water
- Hydraulic fluid (JIS-K2213)
- Silicon oil (JIS-K2213)
- Lubricant (JIS-K6301)
- Fluorocarbon
- Argon
- Carbon dioxide
- Air-containing drainage
- Nitrogen

## Applications



### Restrictor installed fitting type (-X510) **Made to Order**

A pressure switch that has a restrictor installed in the fitting is available to prevent the sensor from being damaged by water hammer or inertia of the fluid.

## Variations

Series	ZSE80	ZSE80F	ISE80	ISE80H
Rated pressure range	0.0 to -101.0 kPa	-100.0 to 100.0 kPa	-0.100 to 1.000 MPa	-0.100 to 2.00 MPa
Withstand pressure	500 kPa	500 kPa	2 MPa	4 MPa
Minimum unit setting	0.1 kPa	0.1 kPa	0.001 MPa	0.001 MPa
Repeatability	±0.2% F.S. ±1 digit			

## 2-color display (LCD)

Can select from 4 indicator patterns of color combinations.

	ON	OFF
①	Red	Green
②	Green	Red
③	Red	Red
④	Green	Green

## Output display

It lights when OUT1 or OUT2 outputs.

## Convex rubber button

Convex button is adopted and provides IP65 rating. Improved maneuverability and operability.

## Lead wire length

- 2 m (Standard)
- 3 m (Made to Order)

## Piping

Rc1/8 (female threaded) is newly added.

- R1/4 (M5 x 0.8 female threaded)
- NPT1/4 (M5 x 0.8 female threaded)
- G1/4 (M5 x 0.8 female threaded)

## Rc1/8

- URJ1/4 (VCR® fitting compliant)
- TSJ1/4 (Swagelok® fitting compliant)

## Output

Analog current output is newly added.

- Advantageous when it is wired for a long distance.
- It is resistant against noise.
- NPN open collector 1 output
- PNP open collector 1 output
- NPN open collector 2 outputs
- PNP open collector 2 outputs
- NPN open collector 2 outputs + Analog voltage output/Auto-shift switching
- PNP open collector 2 outputs + Analog voltage output/Auto-shift switching
- NPN open collector 2 outputs + Analog current output/Auto-shift switching
- PNP open collector 2 outputs + Analog current output/Auto-shift switching

## Secret code setting

This ensures that only authorized persons can operate the switch when the key is locked.



Input an arbitrary 3-digit value.

\* The set-value can be confirmed even when the key is locked.

## Resolution switching function

It prevents minor variation of the indicated value.



(Only the indicated value changes without changing precision.)

## Power-saving mode

Turning off the display can save power consumption. (Power consumption: reduced by up to 18%)



The numerical value disappears and the decimal points blink.


## MPa/kPa switching function

The indication unit for vacuum, compound pressure and positive pressure can be integrated into either MPa or kPa.




## Panel mount

Front protection cover

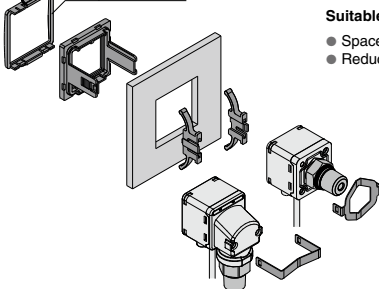


Suitable for side-by-side mounting

- Space-saving
- Reduced panel fitting labor



Only one opening

## Bracket mount



# 2-Color Display Digital Pressure Switch For General Fluids



RoHS


## Series ZSE80/ISE80

### How to Order



For positive pressure

For vacuum/  
compound pressure

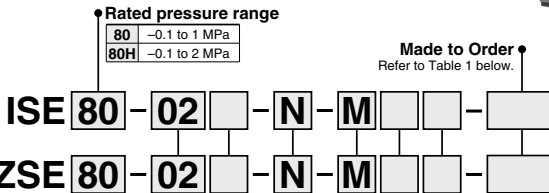

Rated pressure range

80	0 to -101 kPa
80F	-100 to 100 kPa


Piping specifications

02	R1/4 (M5 female threaded)
N02	NPT1/4 (M5 female threaded)
F02*	G1/4*1 (M5 female threaded)
C01	Rc1/8
A2	URJ1/4
B2	TSJ1/4

\* Not applicable to piping direction "L (Bottom ported)".

\* 1 According to ISO 228-1

Piping direction



\* Not applicable to piping specifications "F2(G1/4)".

Output specifications

N	NPN open collector 1 output
P	PNP open collector 1 output
A	NPN open collector 2 outputs
B	PNP open collector 2 outputs
R	NPN open collector 2 outputs + Analog voltage output/Auto-shift switching
T	PNP open collector 2 outputs + Analog voltage output/Auto-shift switching
S	NPN open collector 2 outputs + Analog current output/Auto-shift switching
V	PNP open collector 2 outputs + Analog current output/Auto-shift switching



Table 1  
Made to Order

Symbol	Specifications
-X500 (Note 1)	Wetted parts: Stainless steel 316L
-X501	Lead wire length 3 m
-X510	Restrictor installed fitting
-X531 (Note 2)	M12 4-pin pre-wired connector
-X555 (Note 3)	Rated pressure -100 to 300 kPa

Note 1) Not applicable to the rated pressure range 0 to 2 MPa specification.

Refer to page 836 for detail.

Note 2) Suitable for output specifications A, B only

Note 3) Suitable for output specifications R, T only

### Option

Option	Piping direction	Part no.
Bracket	Rear ported	ZS-24-A
	Rear ported	ZS-24-D
	Bottom ported	ZS-35-A
	Bottom ported	ZS-35-B
Panel mount adapter	Rear ported	ZS-35-C
	Bottom ported	ZS-35-B
Panel mount adapter + Front protection cover	Rear ported	ZS-35-F
	Bottom ported	ZS-35-E

Option 2

Symbol	Operation manual <sup>Note1</sup>	Calibration certificate <sup>Note2</sup>
Nil	●	—
Y	—	●
K	●	●
T	—	●

Note) All texts in both English and Japanese

Unit specifications

Nil	With unit display switching function <sup>Note1</sup>
M	Fixed SI unit <sup>Note2</sup>
P	With unit display switching function <sup>Note1</sup> (Initial value psi)

Note1) Under the New Measurement Law, sales of switches with the unit switching function are not allowed for use in Japan.

Note2) Unit ISE80H: MPa  
Others: MPa, kPa

Option 1

Nil	None
A	With bracket
	Rear ported ZS-24-A Bottom ported ZS-35-A
B	With bracket <sup>Note</sup>
	Rear ported ZS-24-D Bottom ported ZS-35-B
C	Panel mount adapter
	Rear ported ZS-35-C Bottom ported ZS-35-B
D	Panel mount adapter + Front protection cover
	Rear ported ZS-35-F Bottom ported ZS-35-E

Note) Rear ported only

# 2-Color Display Digital Pressure Switch

## For General Fluids *Series ZSE80/ISE80*

For details about the Pressure Switch Precautions, refer to pages 763 and 764. For details about the Specific Product Precautions, refer to the Operation Manual at SMC website.

### Specifications

Model		ZSE80 (Vacuum pressure)	ZSE80F (Compound pressure)	ISE80 (Positive pressure)	ISE80H (Positive pressure)	
Rated pressure range		0.0 to −101.0 kPa	−100.0 to 100.0 kPa	−0.100 to 1.000 MPa	−0.100 to 2.00 MPa	
Pressure display range/Set pressure range		10.0 to −111.1 kPa	−110.0 to 110.0 kPa	−0.105 to 1.100 MPa	−0.105 to 2.20 MPa	
Withstand pressure		500 kPa		2 MPa	4 MPa	
Wetted parts material		Pressure sensor: Stainless steel 630, Fitting: Stainless steel 304				
Applicable fluid		Fluids do not corrode stainless steel 630 and 304				
Port size		R1/4, NPT1/4, G1/4 <sup>(Note)</sup> , URJ1/4, TSJ1/4, Rc1/8 Piping direction: Rear/Bottom				
Power supply voltage		12 to 24 VDC ±10%, Ripple (p-p) 10% or less (with power supply polarity protection)				
Current consumption		45 mA or less				
Switch output	NPN 1 output, NPN 2 outputs, PNP 1 output, PNP 2 outputs					
	Maximum load current	80 mA				
	Maximum load voltage	28 V (at NPN output)				
	Residual voltage	1 V or less (with load current of 80 mA)				
	Response time	2.5 ms (with anti-chattering function: 20, 100, 500, 1000, 2000 ms)				
	Short circuit protection	Yes				
Repeatability		±0.2% F.S. ±1 digit				
Hysteresis	Hysteresis mode		Variable (0 or above)			
	Window comparator mode					
Analog output	Voltage output	Output voltage (Rated pressure range)	1 to 5 V ±2.5% F.S.		0.6 to 5 V ±2.5% F.S.	0.8 to 5 V ±2.5% F.S.
		Linearity	±1% F.S.			
		Output impedance	Approx. 1 kΩ			
	Current output	Output current (Rated pressure range)	4 to 20 mA ±2.5% F.S.		2.4 to 20 mA ±2.5% F.S.	3.2 to 20 mA ±2.5% F.S.
		Linearity	±1% F.S.			
		Load impedance	Maximum load impedance: 300 Ω (Power supply voltage 12 V) 600 Ω (Power supply voltage 24 V)			
			Minimum load impedance: 50 Ω			
Auto-shift input		Non-voltage input (Reed or Solid state), Low level: 0.4 V or less, 5 ms or longer input				
Display		3 1/2-digit, 7-segment, 2-color LCD (Red/Green)				
Display accuracy		±2% F.S. ±1 digit (Ambient temperature of 25 ±3°C)				
Indicator light		Lights up when output is turned ON. OUT1, OUT2: Orange				
Function		Anti-chattering, Zero-clear, Keylock function, Auto-preset, Auto-shift, Display unit switching, Power-saving mode				
Environment	Enclosure		IP65			
	Operating temperature range		Operating: 0 to 50°C, Stored: −10 to 60°C (No freezing or condensation)			
	Operating humidity range		Operating/Stored: 35 to 85% RH (No condensation)			
	Withstand voltage		250 VAC for 1 minute between terminals and housing			
	Insulation resistance		2 MΩ or more (50 VDC measured via megohmmeter) between terminals and housing			
Temperature characteristics		±3% F.S. (25°C reference, within operating temperature range)				
Lead wire		Oilproof heavy-duty vinyl cable, 3 cores (N.P) ø3.5, 2 m 4 cores (A.B) Conductor area: 0.15 mm² (AWG26) 5 cores (R.T.S.V) Insulator O.D.: 0.95 mm				
Standards		CE, UL/CSA (E216656), RoHS				

Note) G1/4 is available for rear ported only.

### Piping Specifications

Model	02	N02	F02	C01	A2	B2
Port size	R1/4	NPT1/4	G1/4	Rc1/8	URJ1/4	TSJ1/4
Weight (Bottom ported)	117 g	118 g	—	114 g	120 g	111 g
Weight (Rear ported)	89 g	90 g	86 g	86 g	92 g	83 g
Leakage	1 x 10 <sup>-5</sup> Pa·m³/s				1 x 10 <sup>-10</sup> Pa·m³/s	

**Set Pressure Range and Rated Pressure Range**

**Set the pressure within the rated pressure range.**


The set pressure range is the range of pressure that is possible in setting.  
The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) on the switch.  
Although it is possible to set a value outside the rated pressure range, the specifications will not be guaranteed even if the value stays within the set pressure range.

Switch		Pressure range			
		-100 kPa	0	100 kPa	1 MPa 2 MPa
For vacuum pressure	ZSE80	-101 kPa	0	10 kPa	
		-111.1 kPa			
For compound pressure	ZSE80F	-100 kPa		100 kPa	
		-110 kPa		110 kPa	
For positive pressure	ISE80	-0.1 MPa		1 MPa	
		-0.105 MPa		1.1 MPa	
	ISE80H	-0.1 MPa		2 MPa	
		-0.105 MPa		2.2 MPa	


Rated pressure range of switch  
Set pressure range of switch

**Analog Output**

**Voltage output**



**Current output**



Range	Rated pressure range	A	B	C
For vacuum pressure	0.0 to -101.0 kPa	10.1 kPa	0	-101.0 kPa
For compound pressure	-100.0 to 100.0 kPa	—	-100.0 kPa	100.0 kPa
For positive pressure	-0.100 to 1.000 MPa	-0.100 MPa	0	1.000 MPa
	-0.100 to 2.00 MPa	-0.100 MPa	0	2.00 MPa


Note) Analog output is 0.8 [V] or 3.2 [mA] at the pressure A.




# Series ZSE80/ISE80

## Internal Circuits and Wiring Examples


### -N NPN (1 output)

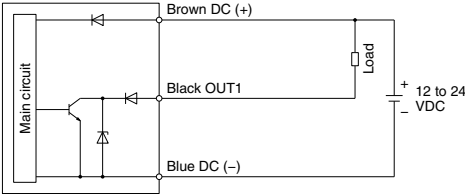


### -P PNP (1 output)

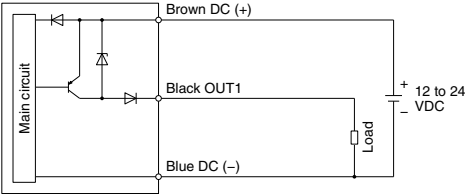


### -A NPN (2 outputs)

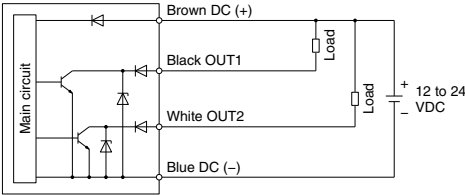


### -B PNP (2 outputs)

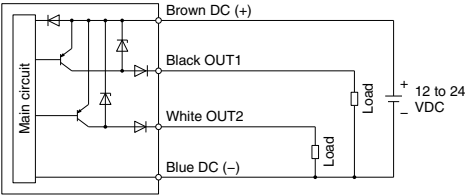


### -R/-S -R: NPN (2 outputs) + Analog voltage output -S: NPN (2 outputs) + Analog current output

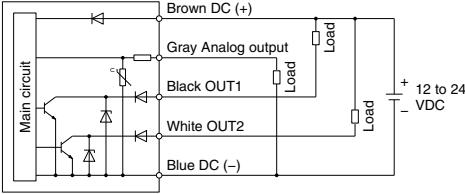


### -R/-S NPN (2 outputs) + Auto-shift input

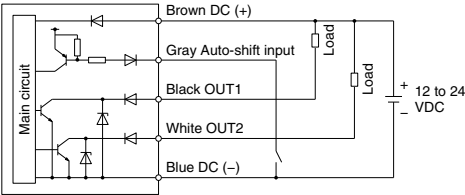

### -T/-V -T: PNP (2 outputs) + Analog voltage output -V: PNP (2 outputs) + Analog current output

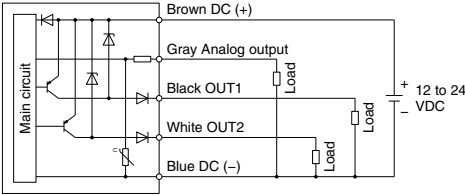

### -T/-V PNP (2 outputs) + Auto-shift input





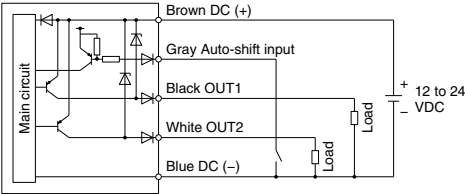




# 2-Color Display Digital Pressure Switch For General Fluids *Series ZSE80/ISE80*

## Dimensions (For details about lead wires, refer to the product specifications.)

ZSE/ISE80 □ □ □  
 02  
 N02  
 F02  
 C01  
 A2  
 B2

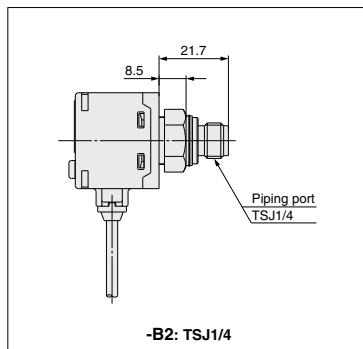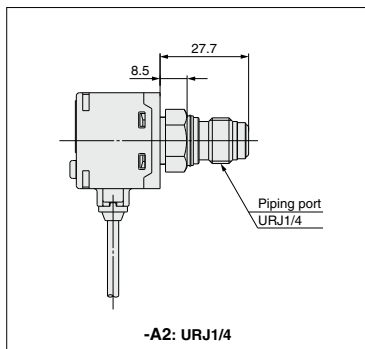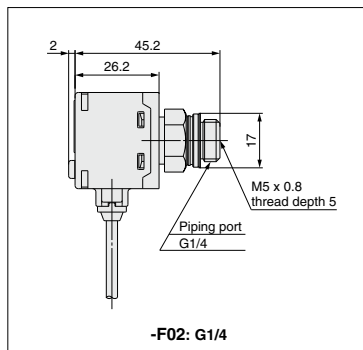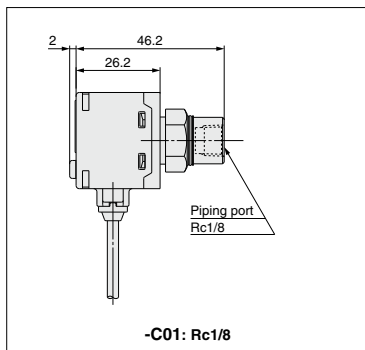
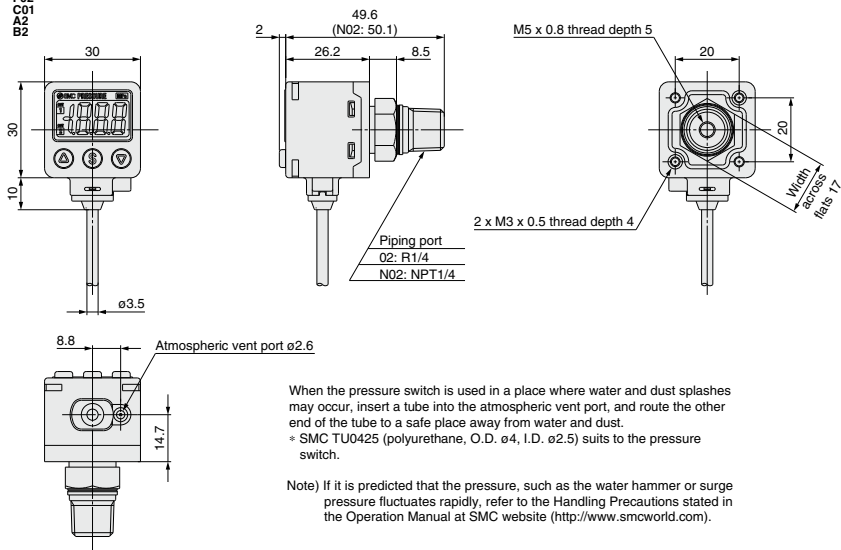


ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
ZSE □
ISE □
ZSP
PS
ISA2
PSE
IS
ISG
ZSM1

# Series ZSE80/ISE80




## Dimensions (For details about lead wires, refer to the product specifications.)

ZSE/ISE80 □ □ - 02L  
                          - N02L  
                          C01L  
                          A2L  
                          B2L

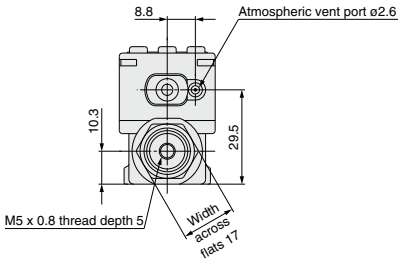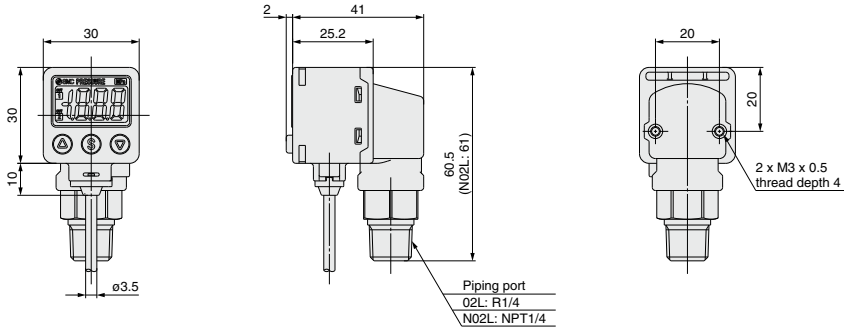

When the pressure switch is used in a place where water and dust splashes may occur, insert a tube into the atmospheric vent port, and route the other end of the tube to a safe place away from water and dust.  
\* SMC TU0425 (polyurethane, O.D.  $\phi 4$ , I.D.  $\phi 2.5$ ) suits to the pressure switch.


Note) If it is predicted that the pressure, such as the water hammer or surge pressure fluctuates rapidly, refer to the Handling Precautions stated in the Operation Manual at SMC website (<http://www.smcworld.com>).

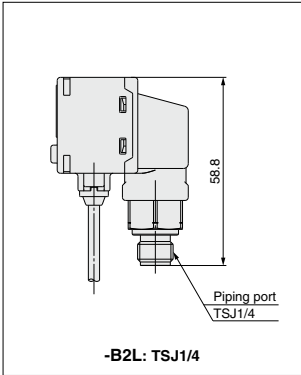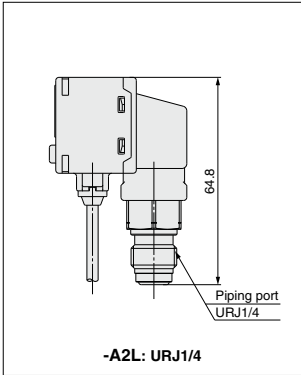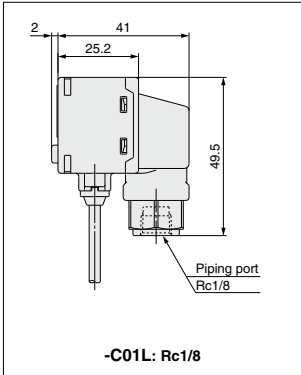

## Dimensions


With bracket (Rear ported)

• ZS-24-A

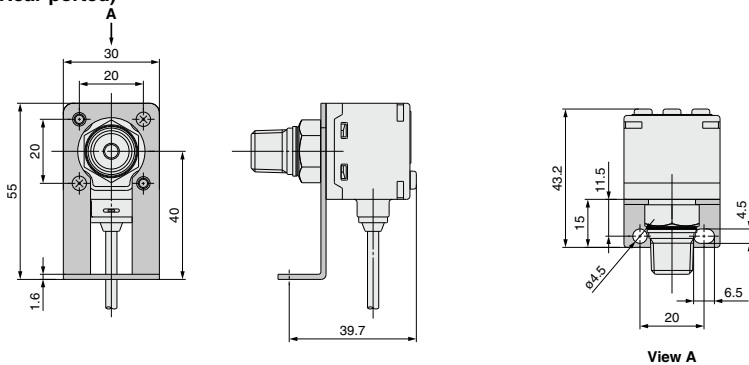


With bracket (Rear ported)

• ZS-24-D

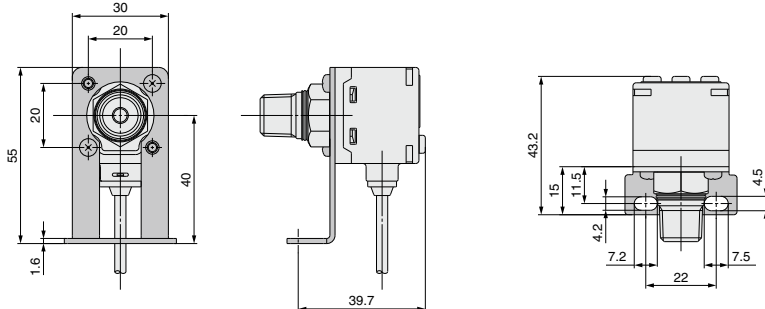

With bracket (Bottom ported)

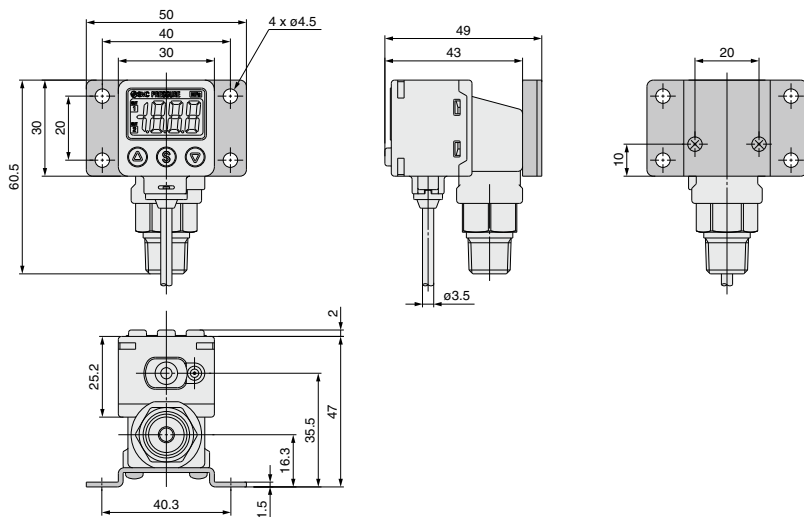


ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
ZSE
ISE
ZSP
PS
ISA2
PSE
IS
ISG
ZSM1


# Series ZSE80/ISE80

## Dimensions

### Panel mount adapter (Rear ported)

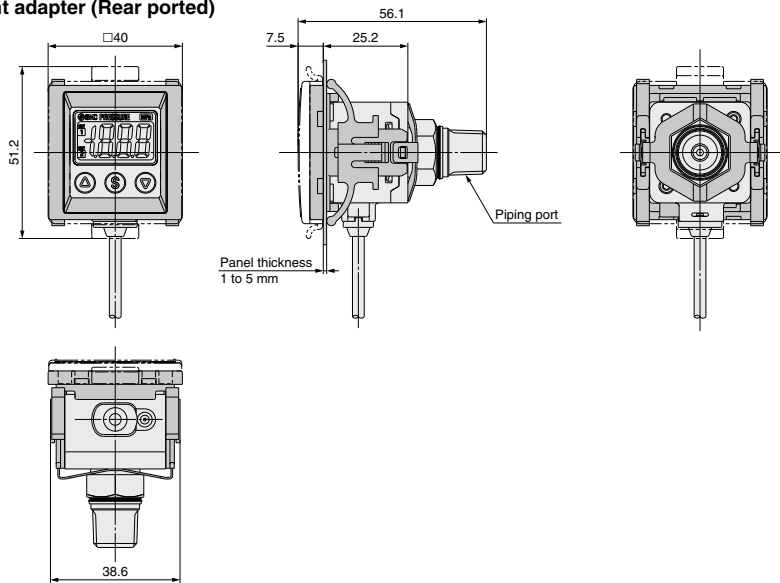


### Panel fitting dimensions

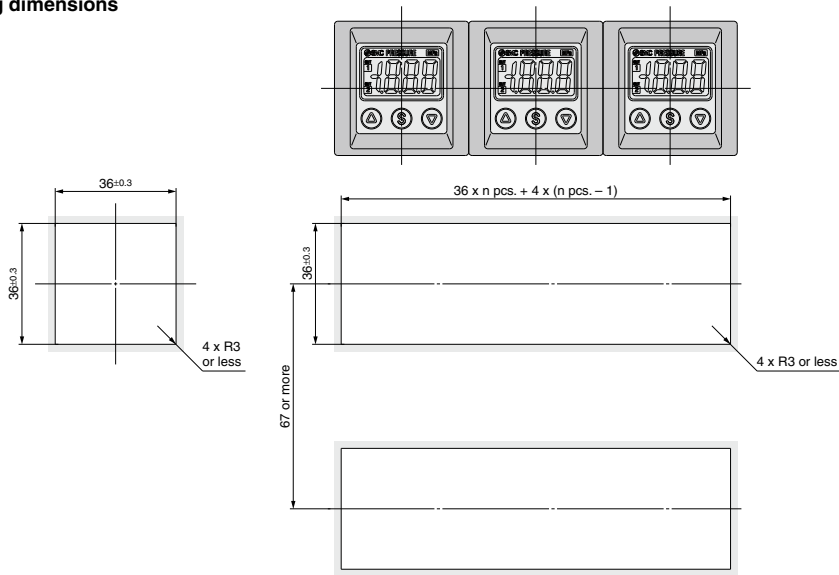


## Dimensions

### Panel mount adapter (Bottom ported)

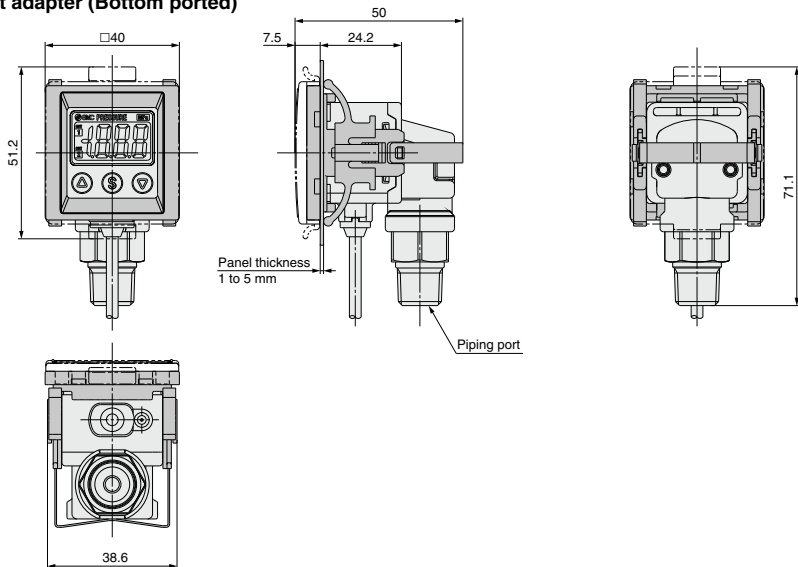

### Panel fitting dimensions

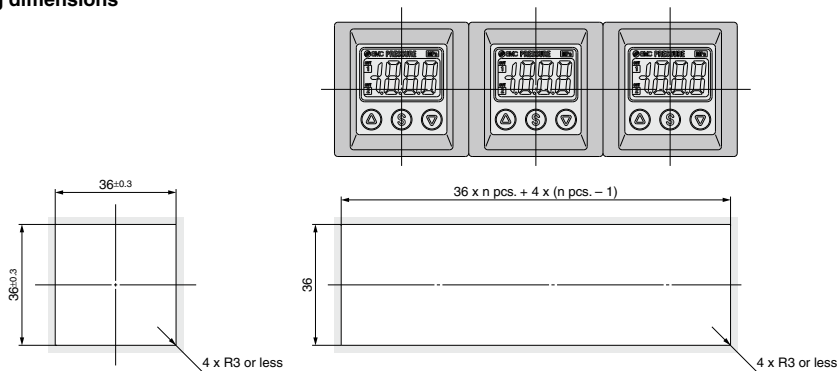

ZSE30
ISE30
ZSE40
ISE40
ZSE10
ISE10
ISE70
ZSE80
ISE80
ZSE
ISE
ZSP
PS
ISA2
PSE
IS
ISG
ZSM1


Function Details

The F ( ) shows the function code number. Refer to the Operation Manual for the details of operation procedures and function codes.

A Auto-shift function (F4)

When there are large fluctuations in the supply pressure, the switch may fail to operate correctly. The auto-shift function compensates such supply pressure fluctuations. It measures the pressure at the time of auto-shift signal input and uses it as the reference pressure to correct the set-value on the switch.

Set-value correction by auto-shift function

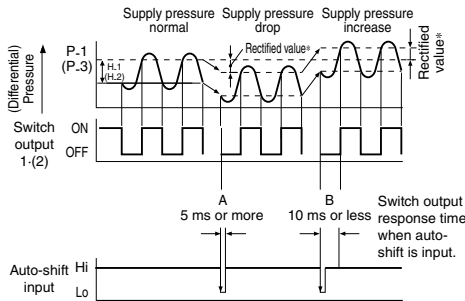

\* Rectified value  
When the auto-shift is selected, "ooo" will be displayed for approximately 1 second, and the pressure value at that point will be saved as a rectified value "C\_5". Based on the saved rectified values, the set-value (Note) of "P\_1", "H\_1", "P\_2", and "H\_2" will likewise be rectified.

Note) When an output is reversed, "n\_1", "H\_1", "n\_2", "H\_2" will be rectified.


Settable Range for Auto-Shift Input

	Set pressure range	Settable range
Compound pressure	-110.0 to 110.0 kPa	-220 to 220 kPa
Vacuum pressure	10.0 to -111.0 kPa	121.0 to -121.0 kPa
Positive pressure	-0.105 to 1.100 MPa	-1.205 to 1.205 MPa
	-0.105 to 2.20 MPa	-2.31 to 2.31 MPa


Auto-shift zero

The basic function of auto-shift zero is the same as the function for auto-shift. Also, it corrects values on the display, based on a pressure value of 0, when the auto-shift is selected.

Output specifications: -R/-S NPN (2 outputs) + Auto-shift input

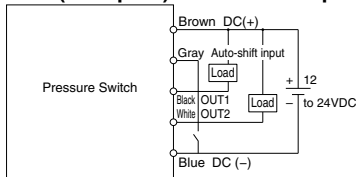


Output specifications: -T/-V PNP (2 outputs) + Auto-shift input

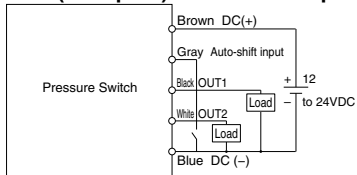

B Auto-preset function (F8)

Auto-preset function, when selected in the initial setting, calculates and stores the set-value from the measured pressure. The optimum set-value is determined automatically by repeating vacuum and break with the target workpiece several times.

Suction Verification

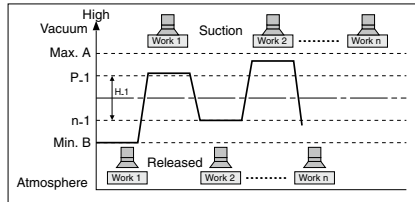


Formula for Obtaining the Set-Value

P_1 or P_2	H_1 or H_2
$P_1 (P_2) = A - (A-B)/4$	$H_1 (H_2) = (A-B)/2$
$n_1 (n_2) = B + (A-B)/4$	

C Display calibration function (F7)

Fine adjustment of the indicated value of the pressure sensor can be made within the range of  $\pm 5\%$  of the read value. (The scattering of the indicated value can be eliminated.)

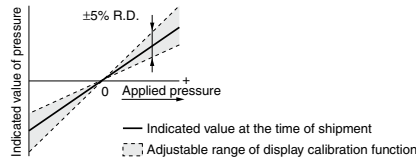

Note) When the display calibration function is used, the set pressure value may change  $\pm 1$  digit.

D Peak/Bottom value indication

This function constantly detects and updates the maximum (minimum) value and allows to hold the maximum (minimum) pressure value. When the (A) (B) buttons are simultaneously pressed for 1 second or longer, while "holding", the hold value will be reset.

E Keylock function

Prevents operation errors such as accidentally changing setting values.

F Zero-clear function

This function clears and resets the zero value on the display of measured pressure. For the pressure switch with analog output, the analog output shifts according to the indication. The indicated value can be adjusted within  $\pm 10\%$  F.S. of the pressure when ex-factory.

## Function Details

### G Error indication function

Error name	Error code	Description
Overcurrent error	$E_{r1}$	Load current of 80 mA or more is applied to the switch output (OUT1).
	$E_{r2}$	Load current of 80 mA or more is applied to the switch output (OUT2).
Residual pressure error	$E_{r3}$	It is still applied with pressure that is $\pm 10\%$ over the atmospheric pressure and the upper limit of the rated pressure range when it is cleared to zero. * After displaying the error code for 1 second, the switch automatically returns to the measuring mode. Due to individual product differences, the setting range varies $\pm 1$ digits.
Applied pressure error	HHH	Supply pressure exceeds the maximum set pressure.
	LLL	Supply pressure is below the minimum set pressure.
Auto-shift error	or	The value measured at the time of auto-shift input is outside the set pressure range. * After displaying the error code for one second, the switch returns to the measuring mode.
System error	$E_{r0}$	Internal data error
	$E_{r4}$	Internal data error
	$E_{r7}$	Internal data error


### H Anti-chattering function (F3)

A large bore cylinder or ejector consumes a large volume of air in operation and may experience a temporary drop in the supply pressure. This function prevents detection of such temporary drops in the supply pressure as an error.

Available response time settings
20 ms, 100 ms, 500 ms, 1000 ms, 2000 ms

#### <Principle>

This function averages pressure values measured during the response time set by the user and then compares the average pressure value with the pressure set point value to output the result on the switch.

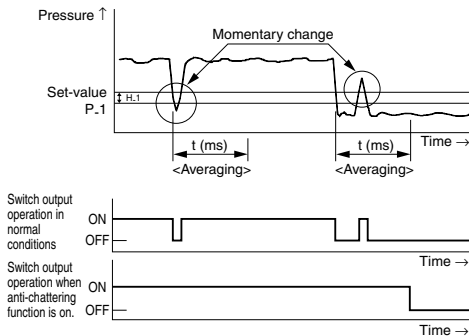

### I Display unit switching function (F0)

Display units can be switched with this function.

Pressure range		For compound pressure	For vacuum pressure	For positive pressure	
Model		ZSE80F	ZSE80	ISE80	ISE80H*
Pa	kPa	0.1	0.1	1	—
	MPa	0.001	0.001	0.001	0.001
GF	kgf/cm <sup>2</sup>	0.001	0.001	0.01	0.01
bAr	bar	0.001	0.001	0.01	0.01
PSI	psi	0.02	0.02	0.1	1
inHg	inHg	0.1	0.1	—	—
mmHg	mmHg	1	1	—	—

\* ISE80H: Does not indicate the last digit when the pressure is 2.000 MPa or higher.

### J Power-saving mode (F9)



The numerical value disappears and the decimal points blink.

Power-saving mode can be selected.

It shifts to the power-saving mode without button operation for 30 seconds. It is set to the normal mode (Power-saving mode is OFF.) when ex-factory. (Decimal points and operation indicator light (only when the switch output is turned ON.) blink in the power-saving mode.)

### K Setting of secret code (F10)



Input an arbitrary 3-digit value.

\* The set-value can be confirmed when the key is locked.

Users can select whether a secret code must be entered to release key lock. At the time of shipment from the factory, it is set such that the secret code is not required.

ZSE30  
ISE30  
ZSE40  
ISE40  
ZSE10  
ISE10  
ISE70  
ZSE80  
ISE80  
ZSE  
ISE  
ZSP  
PS  
ISA2  
PSE  
IS  
ISG  
ZSM1

# Series ZSE80/ISE80

## Made to Order 1

Please contact SMC for detailed dimensions, specifications, and lead times.



### 1 Wetted Parts: Stainless Steel 316L

This pressure switch has better corrosion resistance that uses stainless steel 316L for the wetted parts (pressure sensor and fitting).

#### How to Order

\* Refer to "How to Order" on page 826 for standard specifications.

ZSE80(F)/ISE80(H) — — — — X500

Piping specifications\*

Output specifications\*

Option\*

Note 1) Not applicable to the rated pressure -0.1 to 2 MPa specifications (ISE80H).

Note 2) A restrictor (equivalent to -X510) is installed inside the fitting. (Piping specifications A2(L) and B2(L) are excluded.)

#### Specifications

Model	ZSE80(F)	ISE80
Withstand pressure	500 kPa	1.5 MPa
Applicable fluid	Liquids and gases do not corrode stainless steel 316L	

Models other than above are the same specifications as standard.

### 3 Restrictor Installed Fitting

A restrictor is installed inside the fitting in order to improve endurance of water collision with inertia force in the piping when adsorption is broken.

#### How to Order


\* Refer to "How to Order" on page 826 for standard specifications.

ZSE80(F)/ISE80(H) — — — — X510


Piping specifications\*

Output specifications\*

Option\*



Made to Order "-X510"



Standard

Note 1) Not applicable for piping specifications A2(L) and B2(L).

Note 2) Sometimes does not work for suppression of water hammer effect even if this product is used. Take other measures in such a case.

### 2 Lead Wire Length 3 m

It has a lead wire extended to 3 meters.

#### How to Order

\* Refer to "How to Order" on page 826 for standard specifications.

ZSE80(F)/ISE80(H) — — — — X501

Piping specifications\*

Output specifications\*

Option\*

### 4 M12 4-pin Pre-wired Connector (Lead wire length 100 mm)

#### How to Order

\* Refer to "How to Order" on page 826 for standard specifications.

ZSE80(F)/ISE80(H) — — — — X531


Piping specifications\*

Output specifications\*


Option\*

A: NPN open collector 2 outputs

B: PNP open collector 2 outputs

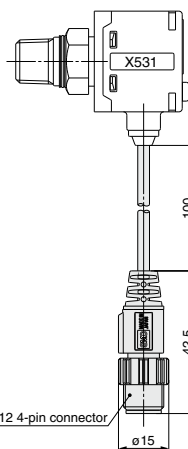

#### Connector pin numbers



Pin no.	Pin name
1	DC(+)
2	OUT(2)
3	DC(-)
4	OUT(1)



Please contact SMC for detailed dimensions, specifications, and lead times.




**5 Rated Pressure -100 to 300 kPa**

It has an extended pressure range of ZSE80F (compound pressure) to -100 to 300 kPa.

## How to Order

\* Refer to "How to Order" on page 826 for standard specifications.

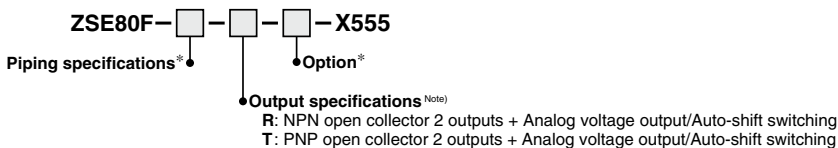

Note) The output is applicable to R, T only.

## Specifications

Model	<b>ZSE80F-□□-□□□-X555</b>
Rated pressure range	~100 to 300 kPa
Set pressure range	~110 to 330 kPa
Set display resolution	1 kPa
Analog output voltage	1 to 5 V ±3% F.S. Linearity: 1.5% F.S.
Display accuracy	± 3% F.S. ±1 digit (Ambient temperature of 25 ±3°C)

Models other than above are the same specifications as standard.

## Unit switching function

Pressure unit		Set display resolution	Rated pressure range	Set pressure range	Settable Range for Auto-Shift Input
PA	kPa	1	-100 to 300	-110 to 330	-440 to 440
	MPa	0.001	-0.100 to 0.300	-0.110 to 0.330	-0.440 to 0.440
GF	kgf/cm <sup>2</sup>	0.01	-1.02 to 3.06	-1.12 to 3.37	-4.49 to 4.49
bAr	bar	0.01	-1.00 to 3.00	-1.10 to 3.30	-4.40 to 4.40
PSi	psi	0.1	-14.5 to 43.5	-16.0 to 47.9	-63.9 to 63.9
inH	inHg	0.1	-29.5 to 88.5	-32.5 to 97.4	-129.9 to 129.9
mmH	mmHg	1	-750 to 2250	-825 to 999 <sup>a</sup>	-1999 to 1999 <sup>a</sup>

\* The setting or display over the range of  $\pm 1999$  is not available when mmHg is selected.

7SM1