

HY-F15 series

Fuse holder

- LED light flashed when fuse is disconnected
- Safety cover installation structure
- DIN rail and bolt fixing installation structure
- Individual products (1P, 2P, 3P) so simple installation
- Material for holder body is nylon glass fiber, excellent insulation and heat resistant



Control switch
Combination display light

Power switch
Main switch
Cam switch

Limit switch
Micro switch

Hoist switch
Foot switch
Mono lever switch

Sign tower
Signal light

Buzzer
Terminal block
Fuse holder


Control box
Cable connector

Discontinued Products

Specification

Model	Rated current	Reference
HY-F15-A	15 A 250 V a.c	a.c 110 - 220 V a.c
HY-F15-D	10 A 24 V d.c	d.c 12 - 24 V d.c

Internal circuit

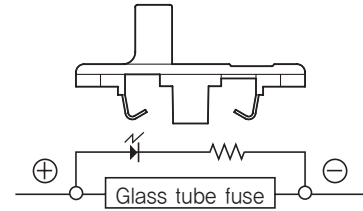

※ Fuse rating:
Ø6 x 30mm glass tube fuse

Dimension (unit : mm)

Model	Appearance	Dimension
HY-F15-1A HY-F15-1D		
HY-F15-2A HY-F15-2D		
HY-F15-3A HY-F15-3D		