


LONG FEELER GAGES

- Made of hardened alloy steel
- Meet DIN2275
- Accuracy: $\pm(3+T/80)$ μm ,
'T' is the thickness of leaves in μm



4605-20

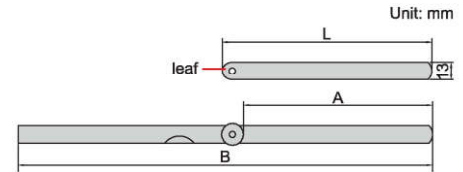

Code	Range	Thickness of leaves included (mm)	Quantity of leaves	L	A	B
4605-13	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.60, 0.70, 0.80, 0.90, 1.00	13	150mm	135mm	295mm
4605-131	0.05-1.00mm		13	200mm	185mm	395mm
4605-132	0.05-1.00mm		13	300mm	285mm	590mm
4605-20	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00	20	150mm	135mm	295mm
4605-201	0.05-1.00mm		20	200mm	185mm	395mm
4605-202	0.05-1.00mm		20	300mm	285mm	590mm

INCH FEELER GAGE

1




4608-31

- 0.010" is made of brass, others are made of hardened alloy steel
- Each blade is marked with inch/metric size

Code	Range	Quantity of Leaves
4608-31	0.0015"~0.035"	32

Thickness of leaves included	Accuracy
0.010" (brass)	$\pm 0.00039"$
0.0015", 0.002"	$\pm 0.0002"$
0.0025", 0.003", 0.004", 0.005", 0.006", 0.007"	$\pm 0.00028"$
0.008", 0.009"	$\pm 0.00035"$
0.010", 0.011"	$\pm 0.00039"$
0.012", 0.013"	$\pm 0.00047"$
0.014", 0.015"	$\pm 0.00051"$

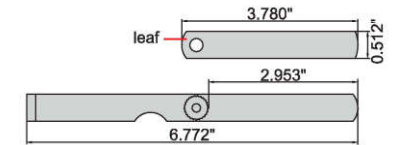


Thickness of leaves included	Accuracy
0.016", 0.017"	$\pm 0.00055"$
0.018", 0.019"	$\pm 0.00059"$
0.020", 0.021"	$\pm 0.00067"$
0.022", 0.023"	$\pm 0.00071"$
0.024", 0.025", 0.026"	$\pm 0.00075"$
0.028"	$\pm 0.00091"$
0.030"	$\pm 0.00094"$
0.032", 0.035"	$\pm 0.00102"$

FEELER GAGE STOCKS

- Used as shims to accurately set spacing
- Made of hardened alloy steel
- Length 300mm
- Width 13mm
- 10 pcs per package



4622-10



Code	Thickness (T)	Accuracy	Code	Thickness (T)	Accuracy	Code	Thickness (T)	Accuracy
4622-02	0.02mm	$\pm 3\mu\text{m}$	4622-15	0.15mm	$\pm 5\mu\text{m}$	4622-60	0.60mm	$\pm 9\mu\text{m}$
4622-03	0.03mm	$\pm 3\mu\text{m}$	4622-18	0.18mm	$\pm 6\mu\text{m}$	4622-65	0.65mm	$\pm 9\mu\text{m}$
4622-04	0.04mm	$\pm 3\mu\text{m}$	4622-20	0.20mm	$\pm 6\mu\text{m}$	4622-70	0.70mm	$\pm 12\mu\text{m}$
4622-05	0.05mm	$\pm 3\mu\text{m}$	4622-25	0.25mm	$\pm 6\mu\text{m}$	4622-75	0.75mm	$\pm 12\mu\text{m}$
4622-06	0.06mm	$\pm 3\mu\text{m}$	4622-30	0.30mm	$\pm 7\mu\text{m}$	4622-80	0.80mm	$\pm 13\mu\text{m}$
4622-07	0.07mm	$\pm 4\mu\text{m}$	4622-35	0.35mm	$\pm 7\mu\text{m}$	4622-85	0.85mm	$\pm 13\mu\text{m}$
4622-08	0.08mm	$\pm 4\mu\text{m}$	4622-40	0.40mm	$\pm 8\mu\text{m}$	4622-90	0.90mm	$\pm 14\mu\text{m}$
4622-09	0.09mm	$\pm 4\mu\text{m}$	4622-45	0.45mm	$\pm 8\mu\text{m}$	4622-95	0.95mm	$\pm 14\mu\text{m}$
4622-10	0.10mm	$\pm 4\mu\text{m}$	4622-50	0.50mm	$\pm 9\mu\text{m}$	4622-100	1.00mm	$\pm 16\mu\text{m}$
4622-12	0.12mm	$\pm 5\mu\text{m}$	4622-55	0.55mm	$\pm 9\mu\text{m}$			