



Satisfy Professional's Needs

**Drill**  
**6411/ 6412/ 6413 10mm (3/8")**

# Overwhelming Performance

## 6412

- Keyed chuck
- Variable speed
- Reversing

## 6413

- Keyless chuck
- Variable speed
- Reversing

## 6411

- Keyed chuck
- Single speed

\*Tool does not come with bit.



# Compact and lightweight, yet with enough power

## Drill

6411 / 6412 / 6413 10mm (3/8")

Powerful motor  
**450w**

Lightweight  
**1.2kg(2.6lbs)**

Compact: 228mm (9") (6411, 6412)


**No load speed 3,000rpm**  
Optimum for light-duty jobs such as small hole drilling in wood

**Chuck capacity:**  
1.5-10mm (1/16"-3/8")

Keyed chuck: 6411, 6412  
Keyless chuck: 6413

**Ergonomically designed rubberized grip**

Provides more comfort and control while minimizing hand fatigue and pain.

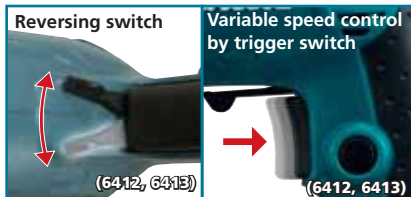

**Lock-on button** for long continuous operation

**In-line design**

Brings drilling pressure in line with center of drill bit axis.




**All ball bearing construction**



## Comparison of Drilling Efficiency

**Note:** 1. It may differ under some conditions.  
2. Numbers in the charts below are relative values when the capacity of competitor B model is indexed at 100.

**Test conditions:** Drilled holes through 60mm thick lauan plywood with 18mm diameter auger bit.

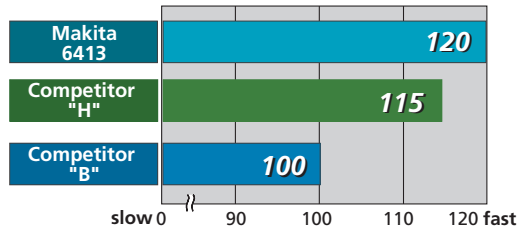

## Drill

6411 / 6412 / 6413 10mm (3/8")

64

- Double Insulation
- Variable Speed (6412, 6413 only)
- Reversing (6412, 6413 only)
- Keyless Chuck (6413 only)

|                                | 6411                                       | 6412                                       | 6413   |
|--------------------------------|--|--|--|
| <b>Continuous rating Input</b> | 450W                                       | 450W                                       | 450W   |
| <b>Capacity</b>                | Steel : 10mm (3/8")<br>Wood : 25mm (1")    | Steel : 10mm (3/8")<br>Wood : 25mm (1")    | Steel : 10mm (3/8")<br>Wood : 25mm (1")        |
| <b>No load speed</b>           | 3,000rpm                                   | 0-3,000rpm                                 | 0-3,000rpm                                     |
| <b>Dimensions (L x W x H)</b>  | 228 x 64 x 183mm<br>(9" x 2-1/2" x 7-1/4") | 228 x 64 x 183mm<br>(9" x 2-1/2" x 7-1/4") | 234 x 64 x 183mm<br>(9-1/4" x 2-1/2" x 7-1/4") |
| <b>Net weight</b>              | 1.2kg (2.6lbs)                             | 1.2kg (2.6lbs)                             | 1.2kg (2.6lbs)                                 |
| <b>Power supply cord</b>       | 2.0m (6.6ft)                               | 2.0m (6.6ft)                               | 2.0m (6.6ft)                                   |

**Standard Equipment**  
Chuck key (6411, 6412)

Items of standard equipment and specifications may differ by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23318-2 2007-04