


FOOT MASTER®

Heavy duty casters GXTT series





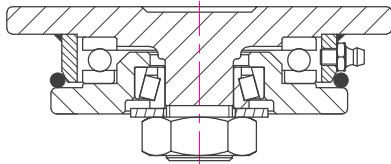



 800~2,300kg  RoHS  -10~90°C





Brackets: Forged steel plate, thrust bearing and taper roller bearing in the swivel head to optimize heavy load, grease nipple, strong welded steel frame, hand-operated wheel brake system, bolted wheel axle structure

Surface Treatment: Powder coating, zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Swivel with brake	Rigid with brake	Wheel type	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
GXTT-75-ASF	GXTT-75-ARF	GXTT-75-BSF	GXTT-75-BRF	HUD	75	40x2	800	125	45	[SF] 140x110	105x80	13
GXTT-100-ASF	GXTT-100-ARF	GXTT-100-BSF	GXTT-100-BRF		100	40x2	1,100	150	50	[RF] 140x117		
GXTT-125-ASF	GXTT-125-ARF	GXTT-125-BSF	GXTT-125-BRF		125	40x2	1,400	175	55	140x117		
GXTT-75-ASF	GXTT-75-ARF	GXTT-75-BSF	GXTT-75-BRF	MCD	75	40x2	1,700	125	45	[SF] 140x110	105x80	13
GXTT-100-ASF	GXTT-100-ARF	GXTT-100-BSF	GXTT-100-BRF		100	40x2	2,000	150	50	[RF] 140x117		
GXTT-125-ASF	GXTT-125-ARF	GXTT-125-BSF	GXTT-125-BRF		125	40x2	2,300	175	55	140x117		

Options

						
Code Suffix	HUD	MCD				
Description	Cast PU(D70)	MC nylon(D80)				
Available for	75 ~ 125	75 ~ 125				