


# NP Series



## Easy Setup with the Low-cost, Compact NP Series

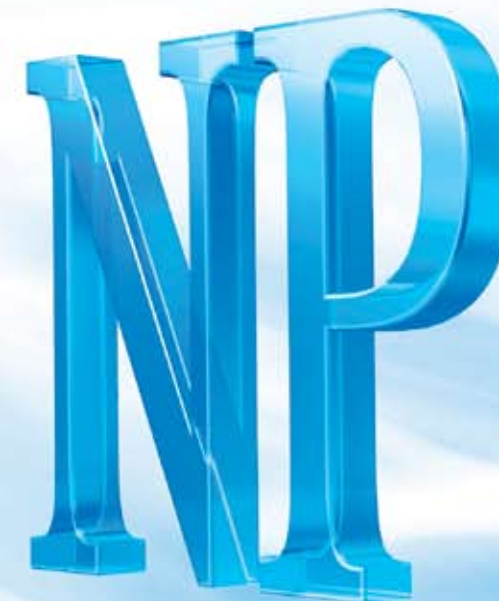

**Singapore Office:**  
**OMRON ELECTRONICS PTE. LTD.**  
 438A Alexandra Road, #05-05/08  
 (Lobby 2) Alexandra Technopark  
 Singapore 119967  
 Tel: (65) 6547 6789  
 Fax: (65) 6547 6769  
 E-mail: mktg\_sg@ap.omron.com

**Malaysia Office:**  
**OMRON ELECTRONICS SDN. BHD.**  
 1101 Level 11 Uptown 1  
 1 Jalan SS21/58 Damansara Uptown  
 47400 Petaling Jaya, Selangor  
 Malaysia  
 Tel: (60-3) 7688 2888  
 Fax: (60-3) 7688 2833  
 E-mail: my\_enquiry@ap.omron.com

**Thailand Office:**  
**OMRON ELECTRONICS CO. LTD.**  
 Rasa Tower 20th Floor  
 555 Phaholyothin Road  
 Chatuchak, Bangkok  
 10900, Thailand  
 Tel: (66-2) 937 0500  
 Fax: (66-2) 937 0501  
 CRM Call Centre: (66-2) 942 6700  
 E-mail: th\_enquiry@ap.omron.com

**Indonesia Office:**  
**PT. OMRON ELECTRONICS**  
 Graha Pratama Building, 3A Floor  
 Jl. M.T. Haryono Kav 15  
 Jakarta Selatan 12810  
 Indonesia  
 Tel: (62-21) 8370 9555  
 Fax: (62-21) 8370 9550  
 E-mail: id\_enquiry@ap.omron.com

**Philippines Office:**  
**OMRON ASIA PACIFIC PTE. LTD.**  
**MANILA REPRESENTATIVE OFFICE**  
 2nd Floor, Kings Court II Building  
 2129 Do Chino Roces Avenue  
 Corner Dela Rosa Street  
 1231 Makati City, Metro Manila  
 Philippines  
 Tel: (63-2) 811 2831  
 Fax: (63-2) 811 2583  
 E-mail: ph\_enquiry@ap.omron.com

**Australia Offices:**  
**Sydney Office:**  
**OMRON ELECTRONICS PTY. LTD.**  
 Omron House  
 71 Epping Road, North Ryde  
 Sydney, New South Wales 2113  
 Australia  
 Tel: (61-2) 9878 6377  
 Fax: (61-2) 9878 6981  
 Toll Free: 1800 678838  
 E-mail: au\_enquiry@ap.omron.com

**Melbourne Office:**  
**OMRON ELECTRONICS PTY. LTD.**  
 Axxess Corporate Park  
 Unit 98, 45 Gilby Road  
 Mt Waverley Victoria 3149  
 Australia  
 Tel: (61-3) 8588 2600  
 Fax: (61-3) 8588 2690  
 E-mail: au\_enquiry@ap.omron.com

**Brisbane Office:**  
**OMRON ELECTRONICS PTY. LTD.**  
 Unit 14, 1378 Lytton Road  
 Hemmant 4174  
 Brisbane Australia  
 Tel: (61-7) 3859 3900  
 Fax: (61-7) 3348 8701  
 E-mail: au\_enquiry@ap.omron.com

**Adelaide Office:**  
**OMRON ELECTRONICS PTY. LTD.**  
 Level 1, Suite 27  
 213 Greenhill Road  
 Eastwood, SA 5063  
 Australia  
 Tel: (61-8) 8274 3727  
 Fax: (61-8) 8357 9634  
 E-mail: au\_enquiry@ap.omron.com

**New Zealand Office:**  
**OMRON ELECTRONICS LTD.**  
 65 Boston Road, Mt Eden  
 Private Bag 92620  
 Symonds Street, Auckland  
 New Zealand  
 Tel: (64-9) 358 4400  
 Fax: (64-9) 358 4411  
 E-mail: nz\_enquiry@ap.omron.com

**India Offices:**  
**Bangalore Office:**  
**OMRON AUTOMATION PVT. LTD.**  
 No. 43, G.N. Complex  
 St. Johns Road  
 Bangalore - 560 042  
 India  
 Tel: (91-80) 4146 6400 / 4146 6401  
 Fax: (91-80) 4146 6403  
 E-mail: bangalore\_enquiry@ap.omron.com

**New Delhi Office:**  
**OMRON AUTOMATION PVT. LTD.**  
 B-1/A-15 (First Floor)  
 Mohan Co-operative Industrial Estate  
 Mathura Road  
 New Delhi - 110 044  
 India  
 Tel: (91-11) 3088 8215 / 3088 8216  
 Fax: (91-11) 4163 8218  
 E-mail: newdelhi\_enquiry@ap.omron.com

**Mumbai Office:**  
**OMRON AUTOMATION PVT. LTD.**  
 102 & 103, Meadows, Sahar Plaza,  
 Andheri-Kurla Road, Andheri East  
 Mumbai - 400 059  
 India  
 Tel: (91-22) 6679 2767  
 Fax: (91-22) 6679 2768  
 E-mail: mumbai\_enquiry@ap.omron.com

**Vietnam Offices:**  
**OMRON ASIA PACIFIC PTE. LTD.**  
**HANOI REPRESENTATIVE OFFICE**  
 6th Floor, 92 Hoang Ngan Street  
 Trung Hoa, Cau Giay  
 Hanoi, SR Vietnam  
 Tel: (84-4) 556 3444  
 Fax: (84-4) 556 3443  
 E-mail: hn\_enquiry@ap.omron.com

**HO CHI MINH REPRESENTATIVE OFFICE**  
 99 Nguyen Thi Minh Khai Street  
 District 1, Ho Chi Minh City  
 SR Vietnam  
 Tel: (84-8) 839 6666  
 Fax: (84-8) 830 1279  
 E-mail: hcm\_enquiry@ap.omron.com


Asia Pacific Head Office:

### OMRON ASIA PACIFIC PTE. LTD.

438A Alexandra Road  
 #05-05/08  
 (Lobby 2) Alexandra Technopark  
 Singapore 119967  
 Tel: (65) 6835 3011 Fax: (65) 6835 2711  
 E-mail: ask@ap.omron.com

Website: [www.omron-ap.com](http://www.omron-ap.com)

Authorized Distributor

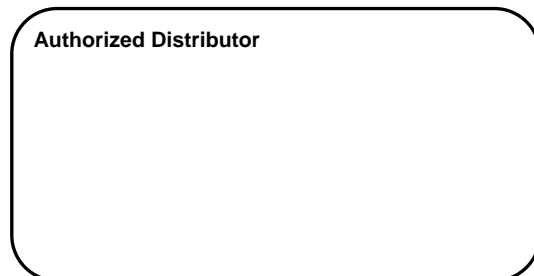

# Simpler and More Versatile. OMRON's Compact NP Series Connect!

Easier connection to OMRON PLCs and Temperature Controllers, plus high-speed transfer of image data via USB.



## Improved Efficiency and Speed from Set Up to Operation!

What do you need in a NP Series? Display visibility, information capacity, low costs? OMRON provides all of these and goes further to reduce the TCO, including operating efficiency, by enabling connection of various control devices, easy design work, and the smoothest possible connections.

Note : The above illustration is a conceptual diagram only. For information on connecting the PT, refer to the user manuals.




## Easy Assembly

### Compact Operating Section

Compact design reduces the mounting work.

At 130.1x104.8mm (NP3:WxH), this NP Series is small enough to be mounted in the same space as a handful of switches, and it requires only one mounting hole in the control panel. You get less work and a less crowded operating section.

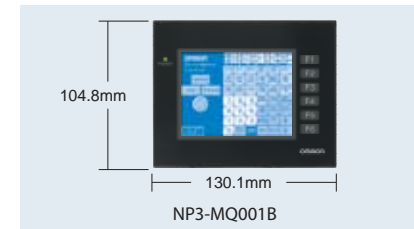

### Install in Most Environments

IP65 water resistance.

The front of the panel has IP65 water resistance, allowing the NP Series to be used in environments where mist or splashing cooling water is present.

Note : The unit may not be able to be used in locations with long-term exposure to oil and water. For details on the installation environment, refer to the user manual.




## Hardware

### Compact, Yet Plenty of Information

The NP3 can display the same amount of information as a 5-inch NP Series.

Using a 3.8-inch QVGA LCD, this NP3 is able to clearly display 8 grayscale levels in monochrome. The advanced display capabilities equivalent to those of a 5-inch NP Series improve the efficiency of onsite operations.

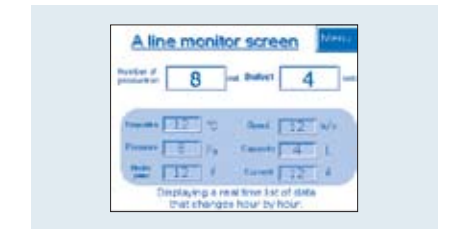


## Easy Connection, Easy Wiring



### Reduce Connection Design and Onsite Work

Excellent matching with OMRON control devices.

The NP Series provides an OMRON CP1L/CP1H PLC Programming Console function, and connects to OMRON EJ1 Temperature Controllers. The NP Series can be operated immediately using the sample screens included with the NP-Designer (Support Software).

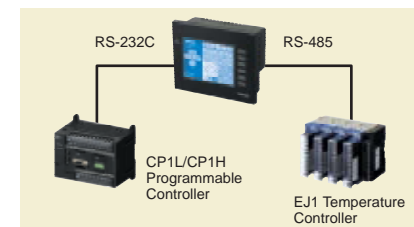

### Use PLCs from Other Companies

Multivendor support is provided for major global manufacturers.

Including OMRON and Mitsubishi, support is provided for PLCs from major global manufacturers. The NP Series can be used with your current PLC without redesigning the system. It doesn't matter if you use a different PLC manufacturer for each project.




## Connectability

### Reduced Wiring Work

Wiring with a single cable.

The NP Series is equipped with both a RS-232 port and a switchable RS-422A/485 port so you can connect to a PLC or Temperature Controller with a single cable. You get reduced wiring work and easier maintenance.

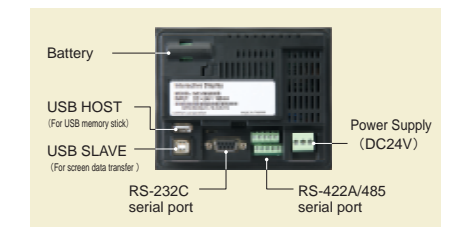

\* NP3-MQ000B, NP3-MQ000, NP3-MQ001B, NP3-MQ001

# Compact design and easy setup! Compatible with your current PLC.


## Easy to Use



### Use a Computer USB Port

Transfer screens at high speed.


The USB interface lets you take full advantage of the computer software environment. Transfer screens created on the computer to the NP Series at high speeds. Or use a USB memory stick to transfer screen data without bringing a computer on-site.

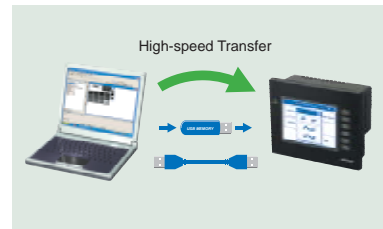

### Easier On-site Operation

Models are available with either of two function key layouts.

Models with two different function key layouts are available to meet the needs of your application design. The NP Series case is also available in two different colors: black or silver.

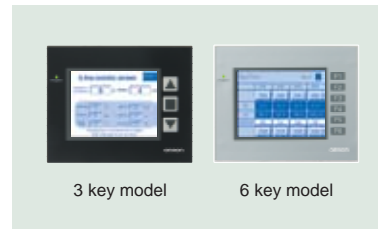


## Operation

### Use the Same Equipment Worldwide

Multi-language Support.

The NP Series, screens, and Support Software are supported in English, Chinese, many European languages, and Japanese. Also, the NP Series meets international standards so it can be exported or imported across country borders easily.

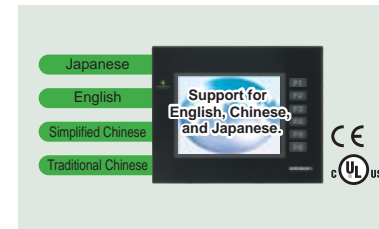

## NP Series Line Up

	3Key Type		6Key Type	
3.8 inches Monochrome STN QVGA 320x240 pixels	NP3-MQ000B	NP3-MQ000	NP3-MQ001B	NP3-MQ001
5.7 inches Monochrome STN QVGA 320x240 pixels	NP5-MQ000B	NP5-MQ000	NP5-MQ001B	NP5-MQ001
5.7 inches Color STN QVGA 320x240 pixels	NP5-SQ000B	NP5-SQ000	NP5-SQ001B	NP5-SQ001

## Example of Applications That Provide Added Value to Equipment

### Packing Machines

Simplified design and processing.  
Operated by touching the screen.



**Design** Easy screen design by using NP-Designer.

**Assembly** No panel processing and wiring for lamp switches needed.

**Operation** Operation and monitoring status can now be achieved with one NP Series. No need for additional processing for additions or modifications.

### Food Processing Equipment

Direct connection to Temperature Controllers.  
Operate the NP Series even with wet hands.



**Design** Enhanced design with silver case that matches stainless-steel equipment.

**Assembly** Connect directly to EJ1 to reduce wiring.

**Operation** IP65 protection allows application in wet environments.

## Ordering Information

Model name	Specifications				Model number
	Effective display area	Number of pixels	Number of function keys	Case color	
NP3	3.8-inch STN monochrome	320x240	3	Black	NP3-MQ000B
				Silver	NP3-MQ000
			6	Black	NP3-MQ001B
				Silver	NP3-MQ001
NP5	5.7-inch STN monochrome	320x240	3	Black	NP5-MQ000B
				Silver	NP5-MQ000
			6	Black	NP5-MQ001B
				Silver	NP5-MQ001
	5.7-inch STN color	320x240	3	Black	NP5-SQ000B
				Silver	NP5-SQ000
			6	Black	NP5-SQ001B
				Silver	NP5-SQ001

# Performance / Specifications


Series	NP3				NP5							
Type	3.8 STN LCD				5.7 STN LCD							
Model number	NP3-MQ000	NP3-MQ001	NP3-MQ000B	NP3-MQ001B	NP5-MQ000	NP5-MQ001	NP5-MQ000B	NP5-MQ001B	NP5-SQ000	NP5-SQ001	NP5-SQ000B	NP5-SQ001B
Display device	Monochrome LCD				Monochrome LCD				Color LCD			
Effective display area	Width 78.8mm x height 59.6 mm (3.8 inches)				Width 121.4mm x height 92.6 mm (5.7 inches)							
Case color	Silver		Black		Silver		Black		Silver		Black	
Number of function keys	3	6	3	6	3	6	3	6	3	6	3	6
Display color	Monochrome/8 grayscale levels								256 colors			
Number of pixels	320 pixel horizontal x 240 pixel vertical											
View angle	Left / right ±30°, Top 10°, Bottom 30°											
Screen data capacity	3MB											
Image data (BMP or JPG images)	8 grayscale levels						256 colors					
Memory Card	Supported (Use USB memory stick (FAT32) )											
Touch panel	Method		Resistive membrane analog type									
	Input		Pressure-sensitive									
	Service life		1,000,000 touch operations min.									
Serial Communications	COM1	Connector	Conforms to EIA RS-232C D-Sub female 9-pin connector 5 VDC output (250 mA max.) through pin 6									
	COM2	Connector	Conforms to RS-422A / 485 10-pin terminal block									
USB SLAVE Specifications	USB rating		USB1.1									
	Connector		TYPE-B (Slave)									
USB HOST Specifications	USB rating		USB1.1									
	Connector		TYPE-A (Host)									

# General Specifications

Item	Specifications
Rated power supply voltage	24 VDC
Allowable voltage range	21.6 to 27.6 VDC (24 VDC -10% to +15%)
Allowable input power interruption time	No restriction
Power consumption	12W max
Ambient operating temperature	0 to 50°C (See notes 1 and 2)
Storage temperature	-20 to + 60°C
Ambient operating humidity	35 to 85%RH with no condensation (0 to 40°C) (See notes 2.) 35 to 50%RH with no condensation (40 to 50°C) (See notes 2.)
Operating environment	No corrosive gases
Noise immunity	Conforms to IEC61000-4-4, 2 KV (power lines)
Vibration resistance (during operation)	5 to 9 Hz with 3.1 mm amplitude and 9 to 150 Hz with 9.8 m/s <sup>2</sup> acceleration for 30 min in each of X, Y, and Z directions
Shock resistance (during operation)	147 m/s <sup>2</sup> 3 times in each of X, Y, and Z directions
Weight	NP5 : 900 g max NP3 : 500g max
Enclosure rating	Front panel: IP65F oil proof (See note 3)
Battery life	5 years (at 25°C)
International standards	EC Directives, cULus (UL508)

(Note 1) When a STN LCD display device is used, the display quality will decline (e.g., the contrast ratio will be reduced) if the temperature exceeds 40°C. Also, when the temperature drops, the response speed is lowered due to characteristics of liquid crystals.

(Note 2) Operate the PT within the temperature and humidity ranges shown in the following diagram

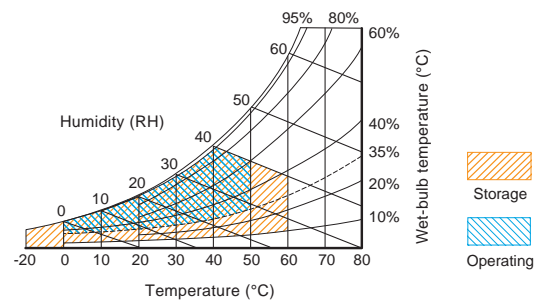


(Note 3) May not be applicable in locations with long-term exposure to water or oil.

# Multivendor List

Brands	Host
OMRON	Host link: C/CPM/CQM PLC
	Host link: CS/CJ/CP1/CV/CVM PLC
	NT link (1:N) (*)
	NT link (1:1)
	EJ1
Allen Bradley	MicroLogix
	SLC5
LG (LS)	Master-K120S/200S
	Glofa GM6 CNET
	Master-K CNET
Matsushita	XGT CNET
	FP Series
Modbus	984 RTU / ASCII (Master)
	RTU / ASCII Hex Address (Master)
	RTU / ASCII nW, RTU 2W (Master)
	RTU / ASCII (Slave)
Brands	Host
Mitsubishi	FX / FX2N CPU port
	FX3U CPU port
	FX Series Computer Link
	A Series Computer Link
	A2A/A2AS/A2USH A1SH/A3N/A2ASH CPU Port
	Q Series CPU Port
Modicon	Q Series Computer Link
	TSX Micro (Uni-Telway) (*)
	NEZA (Uni-Telway) (*)
Siemens	TWIDO
	S7 200
GE Fanuc	S7-300 (with PC Adaptor)
	S7-300 (without PC Adaptor) (*)
Keyence	90 Series SNP
NULL	KV/KZ Series
NULL	Null driver

\* Please refer to NP Host Connection Manual for details.

# Dimensions

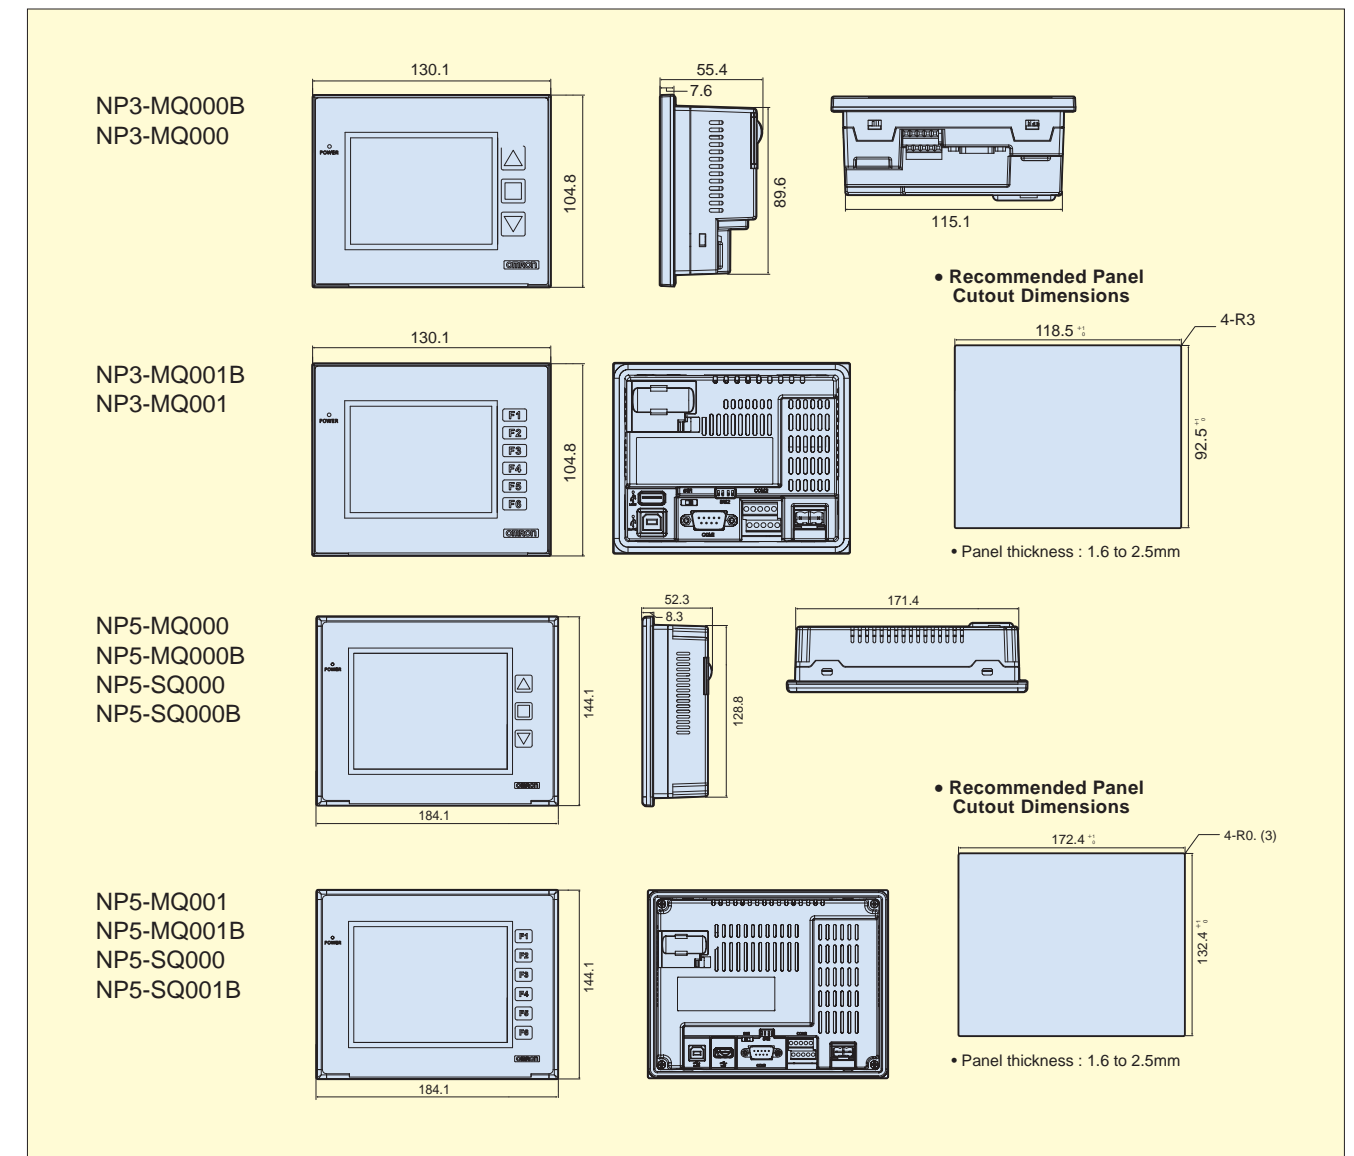

(Units : mm)