


25A 系列 中重型(中空铆接款) Med-heavy Duty (Kingpinless)

安装尺寸 Installation Drawing

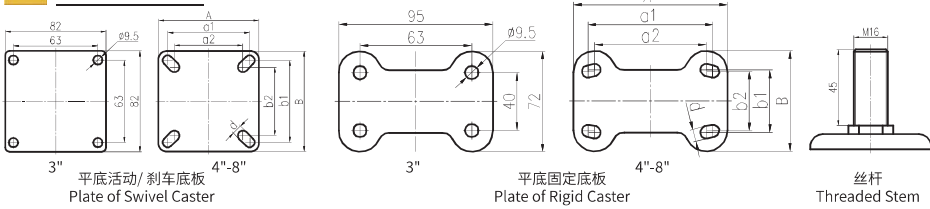

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a1×b1	孔距 a2×b2	孔径 Φd
4"	100	97×97	74×74	67×67	11
5"	130	110×110	90×90	75×75	11
6"	150	120×120	90×90	75×75	11
8"	200	140×140	115×115	100×100	12

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a1×b1	孔距 a2×b2	孔径 Φd
4"	100	120×82	90×50	80×45	11
5"	130	138×90	112×56	100×53	11
6"	150	138×90	112×56	100×53	11
8"	200	152×103	119×63	112×56	12



3-8" 80-550 Kg


产品图片 Product image	性能参数 Performance parameters	轮面材质 Wheel Material	轮片轴承 Bearing	轮片直径 (inch) Wheel Diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs /CTN	平底固定刹车 Rigid with brake	装箱数 PCs /CTN	平底活动 Swivel	装箱数 PCs /CTN	平底刹车 Swivel with brake	装箱数 PCs /CTN	平底边刹 Swivel with brake	装箱数 PCs /CTN	丝杆活动 Threaded stem swivel	装箱数 PCs /CTN	丝杆刹车 Threaded stem swivel with brake	装箱数 PCs /CTN	
RBSF 	轮面硬度 Tire Hardness: 软 Very Soft 耐磨程度 Wearable Level: 适中 Medium 静音效果 Silent running: 顶级 Excellent 地面保护 Floor-protection: 顶级 Excellent	75±3A	钢芯橡胶 Rubber on steel plate structure	法兰轴承 Flanged ball bearing	3"	32	80	25A03-1062	40	25A04-1062	40	25A01-1062	40	25A02-1062	40	-	-	-	-	-	
					4"	38	130	25A12-1063	20	25A13-1063	18	25A10-1063	20	25A11-1063	18	25A72-1063	20	25A14-1063	20	25A15-1063	18
					5"	40	200	25A21-1064	12	25A22-1064	10	25A19-1064	12	25A20-1064	10	25A73-1064	12	25A23-1064	12	25A24-1064	10
					6"	43	250	25A30-1065	8	25A31-1065	8	25A28-1065	8	25A29-1065	8	25A74-1065	8	25A32-1065	8	25A33-1065	8
					8"	45	320	25A39-1066	5	25A40-1066	4	25A37-1066	5	25A38-1066	4	25A75-1066	5	-	-	-	-
PUSF 	轮面硬度 Tire Hardness: 适中 Medium 耐磨程度 Wearable Level: 优秀 Very Good 静音效果 Silent running: 优秀 Very Good 地面保护 Floor-protection: 顶级 Excellent	95±3A*	钢芯聚氨酯 Polyurethane on steel plate structure	法兰轴承 Flanged ball bearing	3"	32	120	25A03-1052	40	25A04-1052	40	25A01-1052	40	25A02-1052	40	-	-	-	-	-	
					4"	32	230	25A12-1651	20	25A13-1651	18	25A10-1651	20	25A11-1651	18	25A72-1651	20	25A14-1651	20	25A15-1651	18
					5"	35	280	25A21-1652	12	25A22-1652	10	25A19-1652	12	25A20-1652	10	25A73-1652	12	25A23-1652	12	25A24-1652	10
					6"	38	330*	25A30-1653	8	25A31-1653	8	25A28-1653	8	25A29-1653	8	25A74-1653	8	25A32-1653	8	25A33-1653	8
					8"	42	400*	25A39-1654	5	25A40-1654	4	25A37-1654	5	25A38-1654	4	25A75-1654	5	-	-	-	-
NLSF 	轮面硬度 Tire Hardness: 硬 Very Hard 耐磨程度 Wearable Level: 顶级 Excellent 静音效果 Silent running: 一般 Medium 地面保护 Floor-protection: 优秀 Very Good	75D±3	钢芯尼龙 Nylon on steel plate structure	法兰轴承 Flanged ball bearing	3"	32	150	25A03-1057	40	25A04-1057	40	25A01-1057	40	25A02-1057	40	-	-	-	-	-	
					4"	32	280	25A12-1676	20	25A13-1676	18	25A10-1676	20	25A11-1676	18	25A72-1676	20	25A14-1676	20	25A15-1676	18
					5"	35	350	25A21-1677	12	25A22-1677	10	25A19-1677	12	25A20-1677	10	25A73-1677	12	25A23-1677	12	25A24-1677	10
					6"	38	450	25A30-1678	8	25A31-1678	8	25A28-1678	8	25A29-1678	8	25A74-1678	8	25A32-1678	8	25A33-1678	8
					8"	42	550	25A39-1679	5	25A40-1679	4	25A37-1679	5	25A38-1679	4	25A75-1679	5	-	-	-	-

*V3.1版本后,因更高要求的企业标准实施,部分标识载重略有调整。

*V3.1版本起钢芯尼龙、聚氨酯轮毂变更。Change of steel core nylon and polyurethane hub from V3.1.

外形尺寸 Overall Dimensions

尺寸 D	轮径 D	平底全高 H	丝杆全高 H	偏心距 F	旋转半径 r
3"	75	100	-	23.5	61
4"	100	144	144	35	85
5"	130	172	172	38	103
6"	150	197	197	40	115
8"	200	250	-	58	158

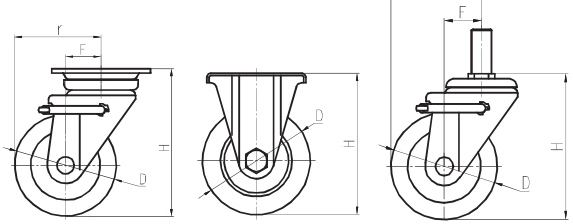

产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 中空式设计 hollow bracket design
- 抗冲击 Shock proof
- 转动轻便 Easy to twirl
- 日式JIS标准 JIS standard

尺寸 Wheel Size	底板厚度 Thickness of top plate	支架厚度 Thickness of bracket
3"	2.5mm	2.5mm
4"-6"	4mm	3mm
8"	4mm	4mm

选配轮片 Optional Wheels

