



# Screwdriver Set

## 31416MR

- Standard screwdriver set

KT NO.	Contents	Each Q'ty
31416MR	 1421 PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	6
	 1422 3.0 x 75, 4.0 x 100, 5.5 x 75, 5.5 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8.0 x 150	






96  
PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31416MR-D	6.20	0.71

## 31516MR

- Standard & go thru screwdriver set

KT NO.	Contents	Each Q'ty
31516MR	 1427 T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	6
	 1461 PH1 x 75, PH2 x 100, PH3 x 150	
	 1462 5.5 x 100, 6.5 x 100, 6.5 x 150, 8.0 x 175	





96  
PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31516MR-D	10.10	0.71

## 31519MR

- Standard Screwdriver set

KT NO.	Contents	Each Q'ty
31519MR	 1411 PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 100E*, PH2 x 150, PH2 x 150E*, PH2 x 38, PH3 x 150, PH3 x 200	6
	 1412 3.0 x 75, 4.0 x 100, 5.5 x 100, 6.5 x 100, 6.5 x 150, 6.5 x 100E*, 6.5 x 38, 8 x 150, 8 x 200, 6.5 x 150E*	

\* Enlarged handle











114  
PC.

Screwdriver shelf size (mm) : 650 x 250 x 210

KT NO.	Kg	CUFT
87111	3.50	1.97
31519MR-D	10.34	0.71

## 31512MR

- Standard & go thru screwdriver set

KT NO.	Contents	Each Q'ty
31512MR	 1481 PH2 x 125  1482 6.5 x 150	6
	 PH2 x 100 24110204  PH2 x 38 24110214	
31512MR01	 1481 PH2 x 125E*  1482 6.5 x 125E*	6
	 1481 PH2 x 100, PH1 x 75, PH2 x 100E*, PH3 x 150  1482 5.5 x 75, 6.5 x 100, 6.5 x 100E*, 8 x 150	



72  
PC.

Screwdriver shelf size (mm) : 420 x 250 x 210

KT NO.	Kg	CUFT
87110	2.47	0.78
31512MR-D	8.23	0.71
87110	3.50	1.50
31512MR01-D	7.86	0.38



# Screwdriver

KT No. & D1



- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

## 1423



- For torx head screw, round shank

14232010, 14232510, 14233010 at the dashboard, car body, engine compartment as well as in industry.



KT NO.	Size	mm		mm	g	kg	mm
		mm	inch				
14230602	T6	48	2	3.2	35	12 / 144	
14230702	T7	48	2	3.2	35	12 / 144	
14230803	T8	75	3	3.2	37	12 / 144	
14230903	T9	75	3	3.2	37	12 / 144	
14231003	T10	75	3	3.2	37	12 / 144	
14231503	T15	75	3	4.0	54	12 / 144	
14231510	T15	250	10	5.0	86	12 / 96	
14232004	T20	100	4	5.0	63	12 / 144	
14232010	T20	250	10	5.0	87	12 / 96	
14232504	T25	100	4	6.0	84	12 / 144	
14232510	T25	250	10	6.0	118	12 / 96	
14232704	T27	100	4	6.0	84	12 / 144	
14233005	T30	125	5	6.0	91	12 / 144	
14233010	T30	250	10	6.0	119	12 / 96	
14234006	T40	150	6	8.0	143	12 / 144	

## 1424



- Square head



KT NO.	Size	mm		mm	g	kg	mm
		mm	inch				
14240105	RB1	125	5	5.0	67	20 / 240	
14240204	RB2	100	4	6.0	83	12 / 144	
14240206	RB2	150	6	6.0	94	12 / 144	

## 1427



- For torx head screw, round shank
- Tamper-resistant type



KT NO.	Size	mm		mm	g	kg	mm
		mm	inch				
14270803	T8H	75	3	3.2	36	12 / 144	
14270903	T9H	75	3	3.2	36	12 / 144	
14271003	T10H	75	3	3.2	36	12 / 144	
14271503	T15H	75	3	4.0	54	12 / 144	
14272004	T20H	100	4	5.0	63	12 / 144	
14272504	T25H	100	4	6.0	84	12 / 144	
14272704	T27H	100	4	6.0	84	12 / 144	
14273005	T30H	125	5	6.0	89	12 / 144	
14274006	T40H	150	6	8.0	142	12 / 144	


## 1428



- Pozidriv head, round shank
- DIN ISO 8764




KT NO.	No.	mm		mm	g	kg	mm
		mm	inch				
14280023	PZ0	60	2-3/8	3.2	37	12 / 96	
14280132	PZ1	80	3-1/8	4.5	57	12 / 96	
14280104	PZ1	100	4	4.5	59	12 / 96	
14280204	PZ2	100	4	6.0	83	12 / 96	
14280306	PZ3	150	6	8.0	142	12 / 144	

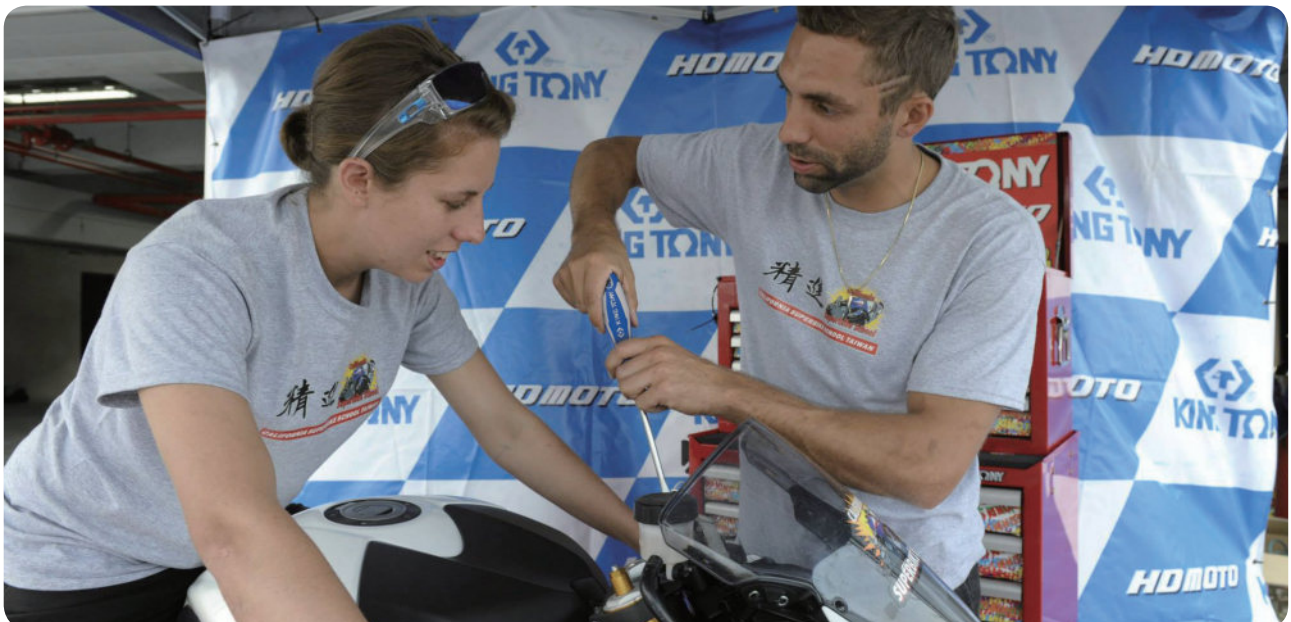

- Magnet
- Chrome plated with black tip

- Color rubber handle
- Grip material - PP + TPR

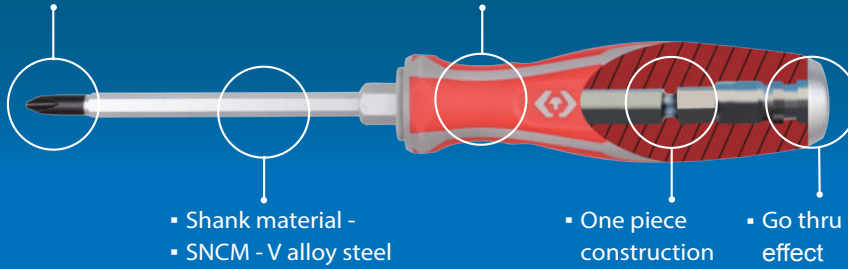

- Shank material - SNCM - V alloy steel

- One piece construction

- Go thru and cushioning effect

## Go Thru Screwdriver & Set

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tips

### 1461

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm		mm	mm	g	kg	No. / Box
		mm	inch					
14610103	PH1	75	3	5.0	10	121	12 / 96	
14610204	PH2	100	4	6.0	10	135	12 / 96	
14610206	PH2	150	6	6.0	10	148	12 / 144	
14610306	PH3	150	6	8.0	13	219	12 / 96	



### 1462

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm		mm	mm		mm	mm	g	kg	No. / Box
	mm	inch		mm	inch					
14625504	5.5	7/32	1.0	100	4	5.0	10	125	12 / 96	
14626504	6.5	1/4	1.2	100	4	6.0	10	134	12 / 96	
14626506	6.5	1/4	1.2	150	6	6.0	10	147	12 / 144	
14620806	8.0	5/16	1.2	150	6	8.0	13	217	12 / 144	
14620807	8.0	5/16	1.2	175	7	8.0	13	228	12 / 144	
14621008	10.0	3/8	1.6	200	8	10.0	16	310	12 / 72	
14621012	10.0	3/8	1.6	300	12	10.0	16	377	10 / 60	
14621210	12.0	15/32	2.0	250	10	10.0	16	347	10 / 40	



### 30206MR

Contents

1.20 kg 1 / 20

⊕ 1461 PH1 x 75, PH2 x 100, PH3 x 150

⊖ 1462 5.5 x 100, 6.5 x 150, 8.0 x 175



6 PC.

### 35208MR

Blow case size (mm) :  
430 x 300 x 50 (1.29 cuft)

Contents

2.16 kg 1 / 4

⊕ 1461 PH1 x 75, PH2 x 100, PH3 x 150

⊖ 1462 6.5 x 100, 8.0 x 175, 10 x 300

⊕ 1421 PH2 x 38

⊖ 1422 6.5 x 38



8 PC.

