

ADJUSTABLE WRENCH


FLA-28-F, FLA-32-F
FLA-43-F, FLA-53-F



The teeth have a special design so as to not damage nuts and bolts. Its design is light and thin, however it's powerful enough to have cleared the Strength Class of the Japanese Industrial Standards.




Convenient multipurpose head



Has a distinctive design to prevent damaging nuts and bolts. It has few protrusions making it easy to use in narrow spaces.

No.	SIZE mm	MAXIMUM OPENING mm	WEIGHT g/w	Quantity	JAN CODE
FLA-28-F	155	0~28	114	6	852002
FLA-32-F	205	0~32	191	6	852019
FLA-43-F	256	0~43	277	6	852026
FLA-53-F	306	0~53	490	6	852033

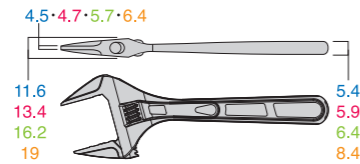


ADJUSTABLE WRENCH

FLA-32G-F, FLA-43G-F



Comes with a specially dipped grip that makes it harder to lose one's grip.

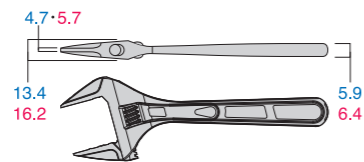


No.	SIZE mm	MAXIMUM OPENING mm	WEIGHT g/w	Quantity	JAN CODE
FLA-32G-F	205	0~32	191	6	852095
FLA-43G-F	256	0~43	277	6	852101

ADJUSTABLE WRENCH SHORT TYPE

FLS-28G-F, FLS-32G-F, FLS-43G-F, FLS-53G-F



A short grip type that's perfectly portable and storable.




No.	SIZE mm	MAXIMUM OPENING mm	WEIGHT g/w	Quantity	JAN CODE
FLS-28G-F	118	0~28	103	6	852040
FLS-32G-F	139	0~32	154	6	852057
FLS-43G-F	156	0~43	235	6	852064
FLS-53G-F	185	0~53	398	6	852071

ADJUSTABLE WRENCH <STANDARD TYPE>

FAW-100-17, 150-24, 200-28, 250-32, 300-38, 375-50, 450-60, 600-70





15 degree-type for easily working in narrow spaces

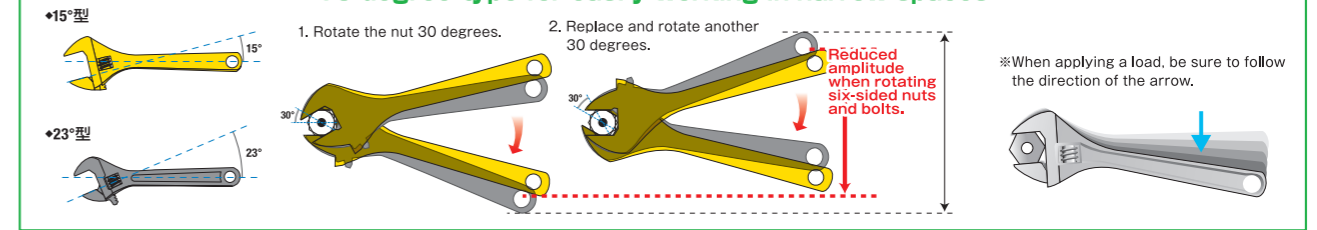


Opens 10% wider than a standard JIS approved model, meaning that this can handle even larger bolts and nuts.

No.	SIZE mm	WEIGHT g/w	MAXIMUM OPENING mm	SIZE mm			Quantity	JAN CODE
				A	B	L		
FAW-100-17	100	55	0~17	6.4	9.5	109	68	852125
FAW-150-24	150	141	0~24	7.1	11.6	159	12	852132
FAW-200-28	200	258	0~28	8.7	14.6	206	12	852149
FAW-250-32	250	468	0~32	11.1	16.9	257	12	852156
FAW-300-38	300	700	0~38	13.5	20.4	308	6	852163
FAW-375-50	375	1250	0~50	15.8	25.4	386	4	852170
FAW-450-60	450	1920	0~60	18.2	30.9	463	1	852187
FAW-600-70	600	3020	0~70	23	36.5	615	1	852194

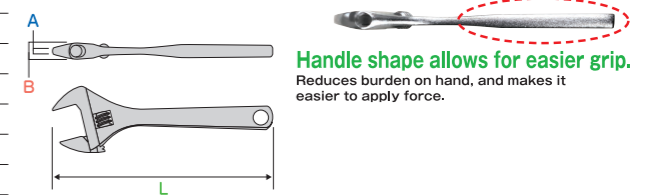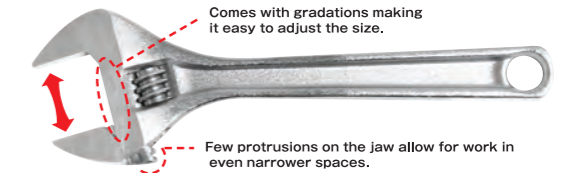

SNAP RING PLIERS EXTERNAL OPEN (STRAIGHT)


FOS-185



Useable size of ring. 10~40mm




No.	SIZE mm	WEIGHT g/w	DIAMETER OF THE TIP mm	RING SIZE mm	PACKAGE SIZE HxWxDmm	Quantity	JAN CODE
FOS-185	185	175	2.0	10~40	223x73x20	6	040027



SNAP RING PLIERS INTERNAL CLOSE (STRAIGHT)


FCS-185



Useable size of ring. 12~65mm




No.	SIZE mm	WEIGHT g/w	DIAMETER OF THE TIP mm	RING SIZE mm	PACKAGE SIZE HxWxDmm	Quantity	JAN CODE
FCS-185	185	175	2.0	12~65	223x73x20	6	040034




SNAP RING PLIERS Detachable claw

No.	PACKAGE SIZE HxWxDmm	Quantity	JAN CODE
FB-1	97x40x5	-	040119
FS-1	97x40x5	-	040126
FS-L1	97x40x5	-	040133
FS-L2	97x40x5	-	040140


FB-1 Bent type



FS-1 Straight type



FS-L1 Straight type



FS-L2 Straight type <standard type>



*The last six digits of JAN (Japanese Article Numbering) Code are displayed with the manufacturer code [4952520] omitted.

*The last six digits of JAN (Japanese Article Numbering) Code are displayed with the manufacturer code [4952520] omitted.