
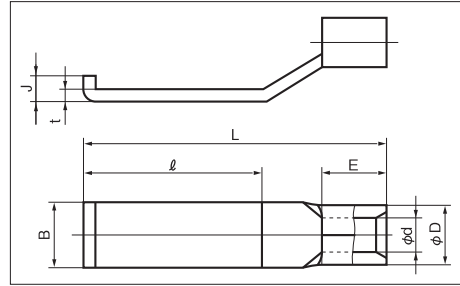


BLADE TERMINALS (BT TYPE)

■ LIPPED BLADE

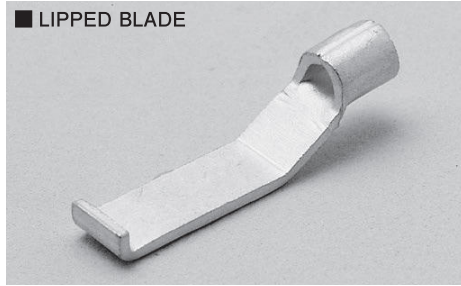

RoHS 10
See page 2



PART NUMBER	DIMENSIONS mm								WIRE RANGE			TOOL No.		STD QTY/BOX
	B	t	ℓ	L	J	E	ϕD	ϕd	SOLID mm	STRANDED mm²	AWG	HAND TOOL No.		
												TOOL BODY No.	DIES No.	
BT 1.25-17	3.0	0.75	12.7	21.5	2.25	4.5	3.4	1.7	0.57 S 1.44	0.25 S 1.65	22-16	NH 1 NH 61A • NH 69 NA 10 NA 3 N10 01 N3 7		1,000 (100×10)
BT 2-17	3.0	0.85	12.7	21.5	2.30	4.5	4.2	2.3	1.14 S 1.82	1.04 S 2.63	16-14	NH 1 • NH 9 NH 61A • NH 69 NA 10 NA 3 N10 02 N3 7		1,000 (100×10)
BT 5.5-17-1	4.6	0.95	12.7	23.5	2.45	6.5	5.6	3.4	1.82 S 2.89	2.63 S 6.64	12-10	NH 1 NH 9 NA 10 NA 3 N10 03 N3 7		1,000 (100×10)

NOTE

- : UL, CSA
- Refer to page 14 for UL/CSA and proper strip length of wire.

BLADE TERMINALS (BTC TYPE)

■ BTC TYPE

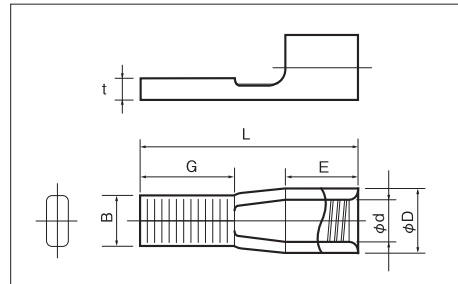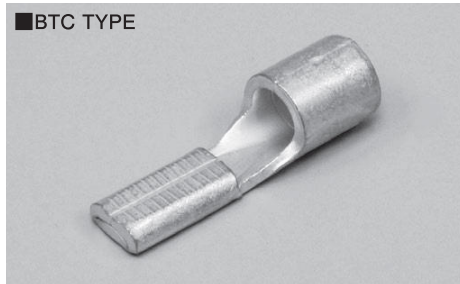

RoHS 10
See page 2

PART NUMBER	DIMENSIONS mm							WIRE RANGE		TOOL No.		Dies Selection	Mating TIC CAP	STD QTY/BOX
	B	t	L	G	E	φD	φd	STRANDED mm ²	AWG	HAND TOOL No.				
										TOOL BODY No.	DIES No.			
BTC 10	7.0	(2.3)	26.4	11.0	8.4	7.1	4.5	6.64 10.52	8	NH 1,NH 9 NOP 60,NOM 60 NA 20 N20 8		8mm ²	TIC 8	100
BTC 16		(3.0)	30.0	13.0	10.0	9.0	5.8	10.52 16.78	6	NH 9,NOP 60,NOM 60 NOP 150HA,NOM 150 NA 20 N20 14		14mm ²	TIC 14	
BTC 25		(3.5)	36.0	17.0	12.0	11.6	7.7	16.78 26.66	4	NOP 60,NOM 60 NOP 150HA,NOM 150 NA 20 N20 22		22mm ²	TIC 22	50

Rating BTC 10 : 61A / BTC 16 : 88A / BTC 25 : 115A