
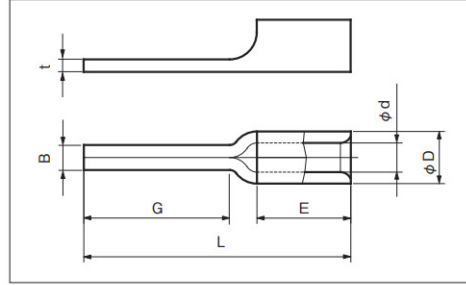


# BLADE TERMINALS (BT TYPE)

A

■ MINIATURE BLADE

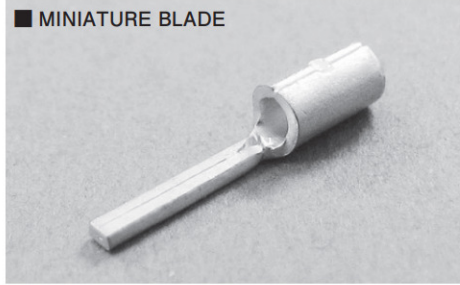

TERMINAL **RoHS 10**  
CAP **RoHS 10**  
See page 2



PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		STD QTY/BOX	
	B	t	L	G	E	φD	φd	STRANDED mm <sup>2</sup>	AWG	HAND TOOL No.		TOOL BODY No.
<b>BT 0.3-9</b>	1.2	0.7	14.7	9.0	4.5	2.2	1.0	0.2~0.5	24-20	NH 69		100×10 (1,000)
<b>BT 0.3-11</b>			16.7	11.0						NA 10 NA 3	N10 04 N3 69	
<b>BT 0.75-7</b> △	1.2	0.7	12.8	7.0	4.5	2.5	1.4	0.3~0.75	22-18	NH 69		100×10 (1,000)
<b>BT 0.75-11</b> △			16.8	11.0						NA 10 NA 3	N10 05 N3 69	

PART NUMBER	CONTENT
<b>BT 0.3-9-C</b>	BT 0.3-9 (50pcs) + VC 0.75 (50pcs)
<b>BT 0.3-11-C</b>	BT 0.3-11 (50pcs) + VC 0.75 (50pcs)

Blade terminal with cap



■ BLADE

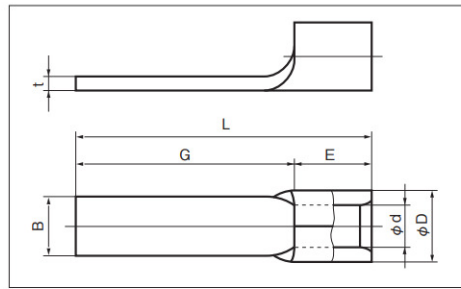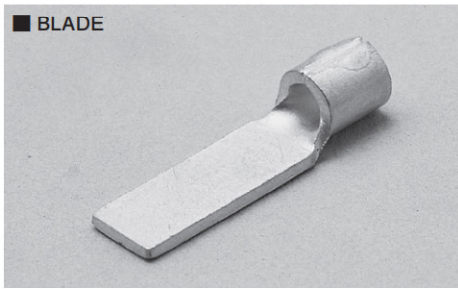

**RoHS 10**  
See page 2

PART NUMBER	DIMENSIONS mm						WIRE RANGE			TOOL No.		STD QTY/BOX																													
	B	t	L	G	E	φD	φd	SOLID mm	STRANDED mm <sup>2</sup>	AWG	HAND TOOL No.		TOOL BODY No.	DIES No.																											
<b>BT 1.25-7.5</b>	1.0	0.75	15.5	11.0	4.5	3.4	1.7	0.57 1.44	0.25 1.65	22-16	NH 1 NH 69		1,000 (100×10)																												
<b>BT 1.25-9-1</b> ○	2.2		13.5	9.0							NA 10 NA 3	N10 01 N3 7																													
<b>BT 1.25-9</b> ○	2.8		13.6	9.1							4.5	4.2		2.3	1.14 1.82	1.04 2.63	16-14	NH 1 NH 9 NH 69		1,000 (100×10)																					
<b>BT 1.25-10-1</b> ○	2.2		15.0	10.5														NA 10 NA 3	N10 02 N3 7																						
<b>BT 1.25-10</b> ○	3.4		14.8	10.3														6.5	5.6		3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9		1,000 (100×10)														
<b>BT 1.25-11</b> ○	3.0		15.7	11.2																					NA 10 NA 3	N10 03 N3 7															
<b>BT 1.25-13</b> ○	3.4		17.5	13.0																					6.5	5.6		3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9		1,000 (100×10)							
<b>BT 1.25-13-1</b> ○	2.2		17.5	13.0																												NA 10 NA 3	N10 03 N3 7								
<b>BT 1.25-14</b> ○	3.0		19.1	14.6																												6.5	5.6		3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9		1,000 (100×10)
<b>BT 1.25-18</b> ○	2.2		23.0	18.5																																			NA 10 NA 3	N10 03 N3 7	
<b>BT 2-9-1</b> ○	2.2	13.5	9.0	6.5	5.6	3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9			1,000 (100×10)																												
<b>BT 2-9</b> ○	2.8	13.6	9.1							NA 10 NA 3																													N10 03 N3 7		
<b>BT 2-13</b> ○	4.6	17.5	13.0							6.5	5.6	3.4		1.82 2.89	2.63 6.64	12-10	NH 1 NH 9			1,000 (100×10)																					
<b>BT 2-13-1</b> ○	2.2	17.5	13.0														NA 10 NA 3																						N10 03 N3 7		
<b>BT 2-18</b> ○	2.2	23.0	18.5														6.5	5.6	3.4		1.82 2.89	2.63 6.64	12-10	NH 1 NH 9			1,000 (100×10)														
<b>BT 5.5-10</b> ○	2.8	16.5	10.0																					NA 10 NA 3															N10 03 N3 7		
<b>BT 5.5-13</b> ○	4.5	19.5	13.0																					6.5	5.6	3.4		1.82 2.89	2.63 6.64	12-10	NH 1 NH 9			1,000 (100×10)							
<b>BT 5.5-13-1</b> ○	2.8	19.5	13.0																												NA 10 NA 3								N10 03 N3 7		
<b>BT 5.5-18</b> ○	4.5	24.5	18.0																												6.5	5.6	3.4		1.82 2.89	2.63 6.64	12-10	NH 1 NH 9		1,000 (100×10)	

NOTE

- : UL, CSA    △ : UL
- Refer to page 14 for UL/CSA and proper strip length of wire.
- BT 1.25-7.5 : Due to narrow blade width, specifications differ from other blade terminals.