


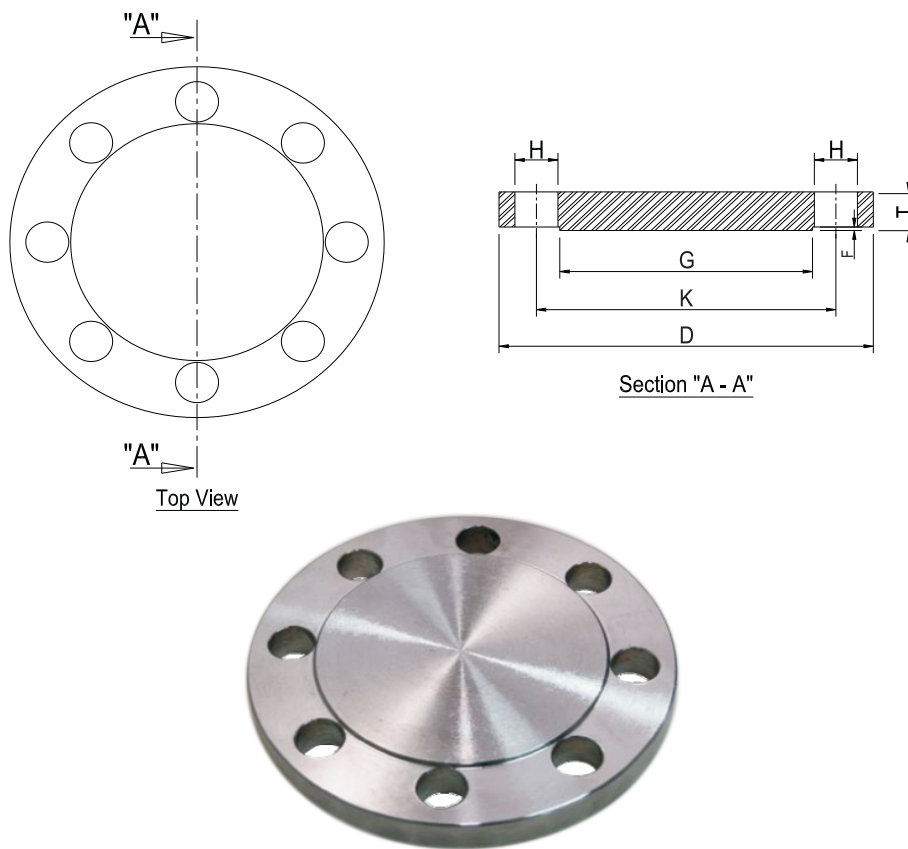

DIN 2527 PN 10 RF BLIND

Size		Flange			Raised Face		Drilling		Weight
mm	inch	D	T	K	G	F	Bolt no.	H	Kg / Pc
DN 15	½"	95	14	65	45	2	4	14	0.64
DN 20	¾"	105	16	75	58	2	4	14	0.93
DN 25	1"	115	16	85	68	2	4	14	1.14
DN 32	1¼"	140	16	100	78	2	4	18	1.66
DN 40	1½"	150	16	110	88	3	4	18	1.85
DN 50	2"	165	18	125	102	3	4	18	2.60
DN 65	2½"	185	18	145	122	3	4	18	3.34
DN 80	3"	200	20	160	138	3	8	18	4.30
DN 100	4"	220	20	180	158	3	8	18	5.29
DN 125	5"	250	22	210	188	3	8	18	7.71
DN 150	6"	285	22	240	212	3	8	22	9.95
DN 200	8"	340	24	295	268	3	8	22	15.88
DN 250	10"	395	26	350	320	3	12	22	23.33
DN 300	12"	445	26	400	370	4	12	22	29.61
DN 350	14"	505	26	460	430	4	16	22	38.31
DN 400	16"	565	26	515	482	4	16	26	47.83
DN 450	18"	615	28	565	532	4	20	26	61.29
DN 500	20"	670	28	620	585	4	20	26	73.27
DN 600	24"	780	28	725	685	5	20	30	98.18