



ANSI B16.5 CLASS 150 FLANGES

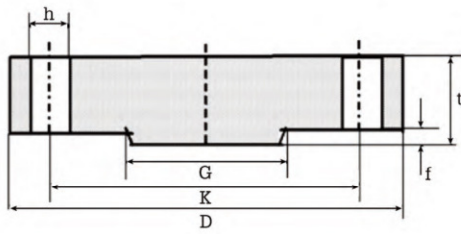

Blind RF

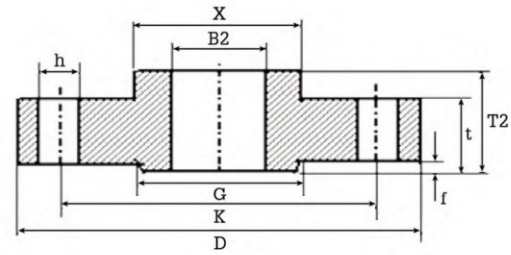

Slip On

BLIND RF DIMENSIONS (mm)

Size		Outside Diameter	Thickness	Holes			Raised Face		Net Weight
				Diameter	Number	P.C.D	Outside Diameter	Thickness	
mm	inch	D	t	h	n	K	G	f	kg
15	½	88.90	11.18	15.75	4	60.45	35.05	1.60	0.42
20	¾	98.55	12.70	15.75	4	69.85	42.93	1.60	0.62
25	1	107.95	14.22	15.75	4	79.25	50.80	1.60	0.86
32	1¼	117.35	15.75	15.75	4	88.90	63.50	1.60	1.16
40	1½	127.00	17.53	15.75	4	98.55	73.15	1.60	1.54
50	2	152.40	19.05	19.05	4	120.65	91.95	1.60	2.43
65	2½	177.80	22.35	19.05	4	139.70	104.65	1.60	3.98
80	3	190.50	23.88	19.05	4	152.40	127.00	1.60	4.95
90	3½	215.90	23.88	19.05	8	177.80	139.70	1.60	6.21
100	4	228.60	23.88	19.05	8	190.50	157.23	1.60	7.04
125	5	254.00	23.88	22.35	8	215.90	185.67	1.60	8.67
150	6	279.40	25.40	22.35	8	241.30	215.90	1.60	11.34
200	8	342.90	28.45	22.35	8	298.45	269.75	1.60	19.54
250	10	406.40	30.23	25.40	12	361.95	323.85	1.60	28.85
300	12	482.60	31.75	25.40	12	431.80	381.00	1.60	43.33
350	14	533.40	35.05	28.45	12	476.25	412.75	1.60	58.41
400	16	596.90	36.58	28.45	16	539.75	469.90	1.60	76.28
450	18	635.00	39.62	31.75	16	577.85	533.40	1.60	93.60
500	20	698.50	42.93	31.75	20	635.00	584.20	1.60	122.62
600	24	812.80	47.75	35.05	20	749.30	692.15	1.60	185.79