

51 TPS Series Gardening Pumps

TPS GARDENING PUMPS



- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/10~1/4HP / 80~200W
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP68
- Maximum depth : 8M

Features

1. Power cable export insulation treatment. No leaking issue.
2. All material is engineering plastic. No rusty issue.

Applications


1. Aquaculture for 24 hours operation
2. Garden landscaping for 24 hours operation
3. Wastewater discharge for 24 hours operation

Specification


Model No.	Output		Outlet		Pass solid (mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension		Weight
	HP	W	mm	inch			1M	2M	3M	4M	5M		L x W x H(mm)	Kg	
TPS-50	1/10	80	20	3/4"	5	40	38	33	20	-	-	4	114 x 114 x 265	2.5	
TPS-200	1/4	200	32	1-1/4"	5	140	135	120	100	80	55	7	168 x 146 x 288	3.6	

Remarks: Model with "A" is equipped with wide angle float switch
Remarks: Model with "S" is for sea water.

Curve



Sectional View

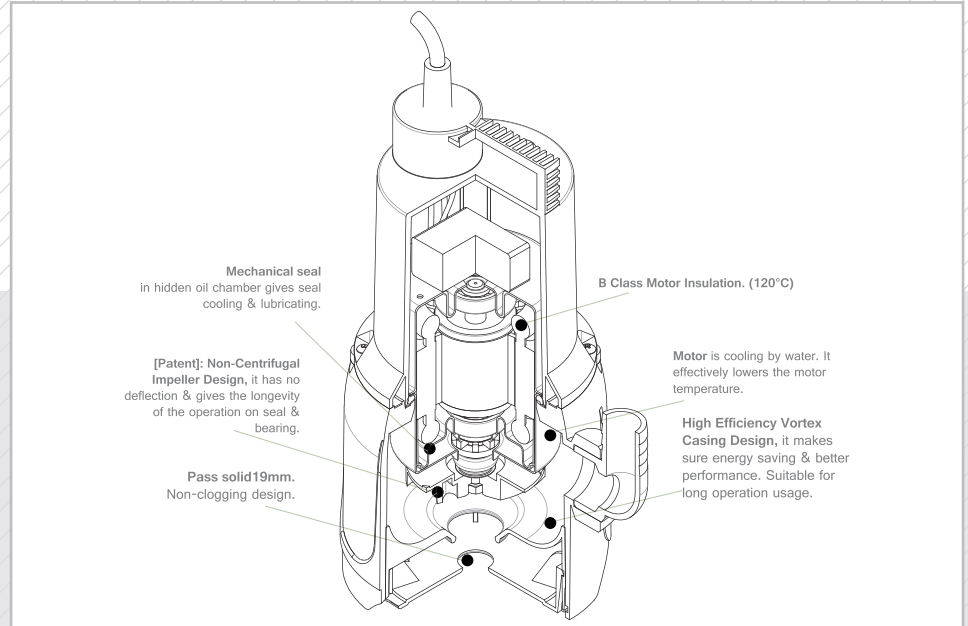

Standard Accessories

Model No.	Accessories
TPS-50	Hose connection
TPS-200	L-shaped hose connection



Dimension

Model	Dimension					
	L	W	H	H1	H2	G
TPS-50	113	114	253	145	13	3/4
TPS/V-200	168	147	340	194	37	1-1/4
TPS/V-600	171	155	402	251	43	1-1/4

