



Cordless Power Cutter CE001G 355 mm (14")



40V^{Li-ion}max + **40V^{Li-ion}max**



Efficiency of concrete cutting
about **25% UP**
Comparison with Engine tool

[Cutting depth: 50mm]

Low vibration
Front handle Rear handle
2.0/1.2
m/s

[Concrete cutting]

Max. cutting capacity
127 mm

Cutting work amount Battery: BL4050F x 2
Work volume on a single full battery charge
Cut concrete continuously:
50mm x 300mm
Diamond wheel: 355mm
18cuts




40V^{Li-ion} max + 40V^{Li-ion} max

XGT X2
80V max

High Power
Durability
Digital
Communication



XGT 40V^{Li-ion} max **XGT X2** 80V max

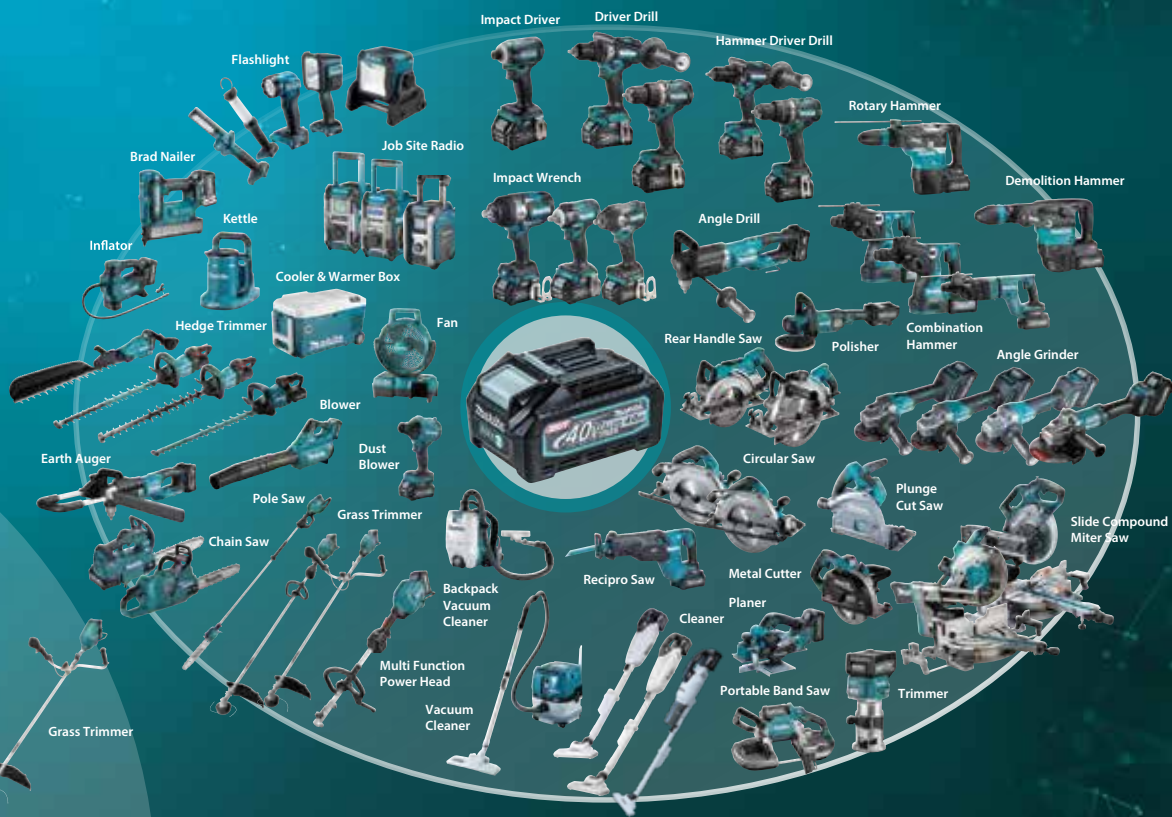

Accessories

Diamond wheel for concrete
Segmented type
355 x 2.8 x 25.4
Part No. E-12996 (EN)



Abrasive cut-off wheel for Metal
355 x 4.3 x 25.4 A24T
5per set
Part No. E-12790-5



Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Power Cutter

CE001G 355 mm (14")

- Brake
- Built-in Job Light

Wheel diameter	355 mm (14")
Wheel hole diameter	25.4 mm (1")
Max wheel thickness	5.0 mm (3/16")
Min. wheel thickness	2.0 mm (5/64")
Max cutting capacity	127 mm (5")
No load speed (RPM)	5,300
Vibration level	Concrete cutting, Front/ Rear: 2.5 / 2.5 m/s ² or less
Sound pressure level	109 dB(A)
Sound power level	120 dB(A)
Dimensions (L x W x H)	w/ BL4040, BL4050F: 786 x 272 x 433 mm (31 x 10-3/4 x 17")
	w/ BL4080F: 786 x 283 x 433 mm (31 x 11-1/8 x 17")
Net weight	12.3 - 14.1kg (27.1 - 31.1 lbs.)

Standard Equipment : Box wrench 13-19 (782037-6), coupling sleeve (123121-2), ring set (191W53-9), wheel cover 355 (312C31-8), laser diamond wheel segmented (D-56998)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202

than engine tools and Low vibration



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration

Front handle Rear handle

2.0/1.2
m/s

[Concrete cutting]

Anti-vibration spring

Anti-vibration housing

Drive unit



Electric brake

XPT

eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

WG / IPX4
WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.



LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Lock-off button

Water supply kit can be connected.

Overload indicator lamp



Optional accessory

40V^{max} Li-ion + 40V^{max} Li-ion **XGT X2** 80V^{max}

More powerful than engine tools and Low vibration



BL
MOTOR



Concrete cutting speed

CE001G 125
Predecessor engine model 100

slow speed fast

CE001G
Battery: BL4050F x 2 (on a single full battery charge)
Cut concrete continuously: 50mm x 300mm
Diamond wheel: 355mm



Max. cutting capacity
127mm

Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration
Front handle Rear handle
2.0/1.2
m/s

[Concrete cutting]



(BRAKE) Electric brake

XPT eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather


WG / IPX4
WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.



AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

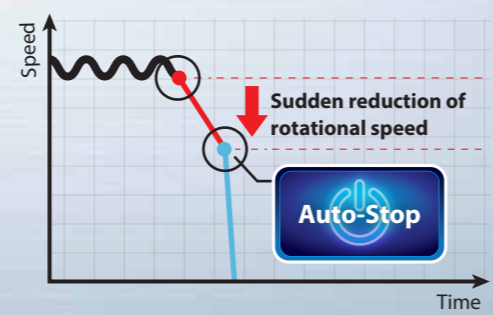

LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Lock-off button
Water supply kit can be connected.

Overload indicator lamp





High Power
Durability
Digital Communication



Cordless Power Cutter
CE002G 355 mm Dry
CE001G 355 mm Dry & Wet



CE002G
355 mm Dry



CE001G
355 mm Dry & Wet



Accessories Standard Equipment ● CE001G ● CE002G

Diamond wheel for concrete
Segmented typ
355 x 25.4
Part No. D-56998



Abrasive cut-off wheel for Metal CE001G only
355 x 4.3 x 25.4 A24T
5per set
Part No. E-12790-5



Vacuum brazed diamond wheel for rescue 350mm
Part No. B-55348



Wireless unit set/WUT01
CE002G only
Part No. 199393-1



Charging Time

40V Li-ion max	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
BL4040 4.0Ah	45 min	67 min	210 min	
*1 BL4040F 4.0Ah	45 min	67 min	210 min	
*1 BL4050F 5.0Ah	50 min	85 min	260 min	
*1 BL4080F 8.0Ah	76 min	170 min	420 min	

*1 Recommended battery

Cordless Power Cutter

	CE002GZ/ CE001GZ01 355 mm
Brake	CE002G: 355 mm CE001G: 355 mm
Dust Collection (CE002G only)	CE002G: 25.4 mm CE001G: 25.4 mm
Built-in Job Light	CE002G: 4.0 mm CE001G: 5.0 mm
Standard Equipment:	CE002G: 2.0 mm CE001G: 2.0 mm
CE002G:	CE002G: 127 mm CE001G: 127 mm
Ring set (191W53-9), hose clamp 40 (413N26-1), hose clamp 46 (413P08-5), box wrench 13-19 (782037-6), laser diamond wheel segmented (D-56998)	CE002G: 4,200 CE001G: 5,300
CE001GZ01:	CE002G: 2.5 / 2.5 m/s ² or less CE001G: 2.5 / 2.5 m/s ² or less
Coupling sleeve (123121-2), ring set (191W53-9), box wrench 13-19 (782037-6), laser diamond wheel segmented (D-56998)	CE002G: 106 dB(A) CE001G: 109 dB(A)
	CE002G: 117 dB(A) CE001G: 120 dB(A)
	CE002G: 825 x 272 x 487 mm w/ BL4040/F, BL4050F CE001G: 786 x 283 x 433 mm w/ BL4080F
	CE002G: 13.1kg (BL4040Fx2) CE001G: 12.3kg (BL4040Fx2)
	CE002G: 15.1kg (BL4080Fx2) CE001G: 14.1kg (BL4080Fx2)
	CE002GZ/CE001GZ01: No battery, charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

A3-062023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-5-6, Block 16, 16L1-2 Đường số 3, KCN VSPP P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Kho 5, Số 1, Đường Số 6 KCN - DT - DV VSP Bắc Ninh, X. Phú Châu, TX. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Trờn Nà Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
369 Vù Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT
68 Lê Đức Thọ, P. Thới Kh, TP. Bùn Ma Thuột, T. Đắk Lắk.
ĐT: 0262 255 4556 Fax: 0262 255 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lô D4-01, Dự án Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG
Lô 36-38 Đường B8, Khu đô thị Vĩnh Diễm Trung, Xã Vĩnh Ngọc, TP. Nhà Trng, T. Khánh Hòa.
ĐT: 0238 220 0939

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191

Max. cutting capacity
127 mm



CE002G only CE001G only



More powerful than engine tools



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.


Low vibration
Front handle Rear handle
2.0/1.2
m/s
Concrete cutting



BL MOTOR High power Brushless motor



AFT Active Feedback sensing Technology

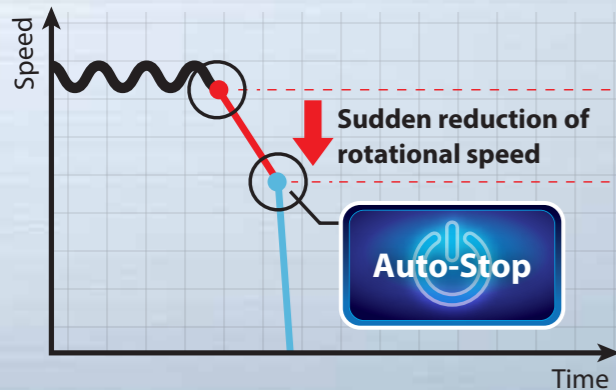

Can be used with Vacuum cleaner. CE002G only

Dust collection rate during operation is 90% or more in cutting concrete with vacuum cleaner*1 connected.

- Designed specially for cutting with diamond wheel
 - Our recommended vacuum cleaners*1 are those with air flow of 1.8m³/min or more.
- *1 VC4210M, VC002G series, etc

AWS Auto-start Wireless System

(CE002G only)

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



CE002G 355 mm (14") Dry



CE001G 355 mm Dry & Wet



(BRAKE) XPT eXtreme Protection Technology

(CE001G only)

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather




LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Overload indicator lamp

