

**LED job light (DJR360, DJR187)**



**Retractable rafter hook (DJR360, DJR187)**



**BL MOTOR**  
Brushless DC motor  
(DJR360, DJR187)

**Electronic 2-speed**  
(DJR360, DJR187)

**Two-finger switch trigger**

**Soft grip**  
provides more comfort and control.

**Electric brake**


**18V LITHIUM-ION**

**Toolless blade change**  
Redesign of Blade clamp makes it easier to remove a blade.

Photo : DJR187

**Toolless shoe adjustment (DJR360, DJR187)**

Lever system is employed instead of button system. It prevents the blade lock from unintentional releasing.



**DJR360 :** Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.

**Power by 18V Li-ion battery**

with Battery fuel gauge

- BL1860B : 6.0Ah
- BL1850B : 5.0Ah
- BL1840B : 4.0Ah
- BL1830B : 3.0Ah



BL1850B

- BL1820B : 2.0Ah
- \*BL1815N : 1.5Ah



BL1815N

**Fast Charger**  
DC18RC



**Charger**  
Two Port Multi Fast Charger  
DC18RD




**Charger**  
DC18SD



**Efficiency of Metal Cutting**

Note: 1. Numbers in the charts below are relative values when the capacities of Competitor "M" at 100.  
2. The test results depend to a great extent on the hardness of materials, etc.

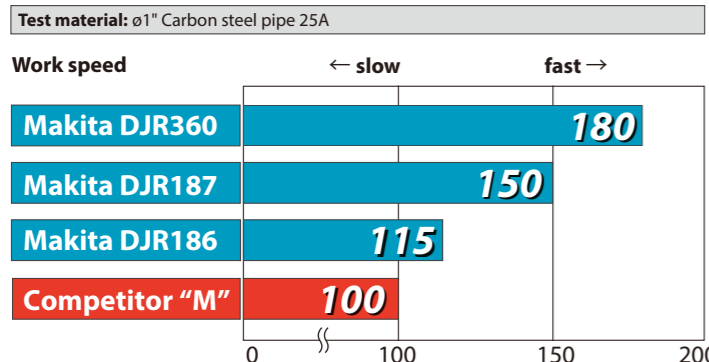

**Cordless Recipro Saw**

**DJR360RT2/DJR360RT2 / DJR187RTE/DJR187RTE/DJR186Z**

	DJR360
Variable Speed	
Electronic 2-speed (DJR360, DJR187)	
Brake	
Built-in Job Light (DJR360, DJR187)	
Carrying Case	
<b>Capacity</b>	Pipe : 130mm Wood: 255 mm
<b>Length of Stroke</b>	32 mm
<b>Strokes Per Minute (SPM)</b>	High: 0-3,000 Low: 0-2,300
<b>Dimensions (L x W x H)</b>	449x116x243mm
<b>Net weight</b>	BL1815N : 4.0kg BL1850B : 4.6kg

DJR360RT2: 2 battery BL1850B set, DC18RC fast charger  
DJR360Z: No battery, charger

	DJR187	DJR186
<b>Capacity</b>	Pipe : 130mm Wood: 255 mm	Pipe : 130mm Wood: 255 mm
<b>Length of Stroke</b>	32 mm	32 mm
<b>Strokes Per Minute (SPM)</b>	High: 0-3,000 Low: 0-2,300	0-2,800
<b>Dimensions (L x W x H)</b>	439x83x231mm	486x81x223mm
<b>Net weight</b>	BL1815N : 3.4kg BL1850B : 3.7kg	BL1815N : 3.5kg BL1850B : 3.8kg

DJR187RTE: 2 battery BL1850B set, DC18RC fast charger  
DJR187Z: No battery, charger  
DJR186Z: No battery, charger

Phụ kiện kèm theo: DJR360/DJR187/DJR186: reciprosawblade for metal (B-05169), reciprosawblade for wood (B-05175).

weight according to EPTA-Procedure 01/Ver.2.1

Items of standard equipment and specifications may vary by country or area.



**Cordless Recipro Saw**  
DJR186/DJR187/DJR360



**High power and High durability**



**Vertical crank mechanism**

**DJR360**



**DJR187**



**DJR186**



**CÔNG TY TNHH MAKITA VIỆT NAM**

Kho 456, Block 16, 18L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương  
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

**CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC**  
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSPP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh  
ĐT: 0222 376 5942 Fax: 0222 376 5941

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI**  
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội  
ĐT: 0243 202 2585

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG**  
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng  
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ**  
366 Võ Văn Kiệt, Khu Vực 3, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ  
ĐT: 0292 389 4358 Fax: 0292 389 4359

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUƠN MA THUỘT**  
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buôn Ma Thuột, T. Đắk Lắk  
ĐT: 0262 355 4556 Fax: 0262 355 4557

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG**  
Số 01 Lê Đức Thọ, P. Hoàng Mai, TP. Hải Phòng  
ĐT: 0225 863 1529

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG**  
Lô 56-58 Đường B6, Khu đô thị Vĩnh Diễm Trung, Xã Vĩnh Ngọc, TP. Nhà Trng, T. Khánh Hòa  
ĐT: 0258 220 0039

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH**  
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh  
ĐT: 0283 821 5151



Photo: DJR187

# Newly designed vertical crank mechanism


And featuring high output Brushless DC motor, enabling outstanding performance in cutting work.

(DJR360, DJR187)




Photo: DJR360

## Smooth cutting with new crank system

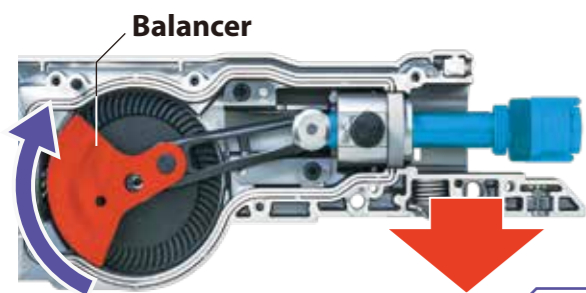

The rolling of Balancer decreases and materials are pushed stronger

## Backward stroke is faster

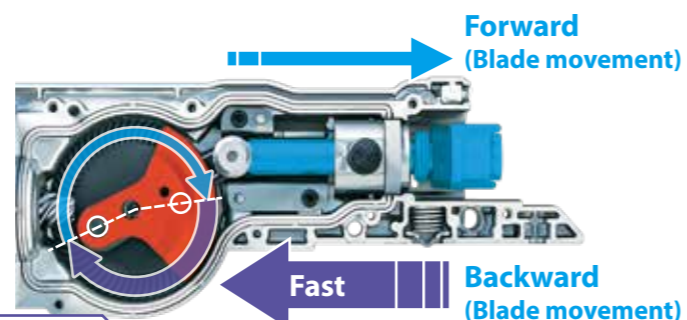

Backward rotating angle is less.

**Cutting speed**  
approx **TWICE**  
as fast as the 18Vx1 predecessor model when cutting a 25A(ø1") pipe with DJR360.

**Long Stroke**

**32mm**

**High Speed**  
Strokes per minute

**3,000** min<sup>-1</sup>

(DJR360, DJR187)

## High durability

**More durable mechanism to hold slider**

A roller on the rear end of slider reciprocates on the rail of metal plate, providing higher durability than the current mechanism using plane bearing as the rear slider holder.

**More rigid shoe**

- Shoe has been reinforced.
- Fixed type shoe is used for added durability.

**Mechanical durability**  
more than **twice**



**XPT**  
EXTREME PROTECTION TECHNOLOGY

