

Incremental rotary encoder TH140N


- Compact design
- Up to 1024 ppr
- 4.75 V ... 30 V with short-circuit proof push-pull output
- RS 422 functionality at 5 V operation



Function

The TH140 continues the new economical target line of Pepperl+Fuchs. With a small outside diameter of 40 mm, the unit is ideal for use in industrial areas where very little space is available. The technology of the rotary encoder is adapted to the new requirements of the rotary encoder market. Innovative fast technology with Opto-ASIC forms the central basis of the device. The rotary encoder is available with a pulse count of up to 1024 pulses per revolution.

Dimensions

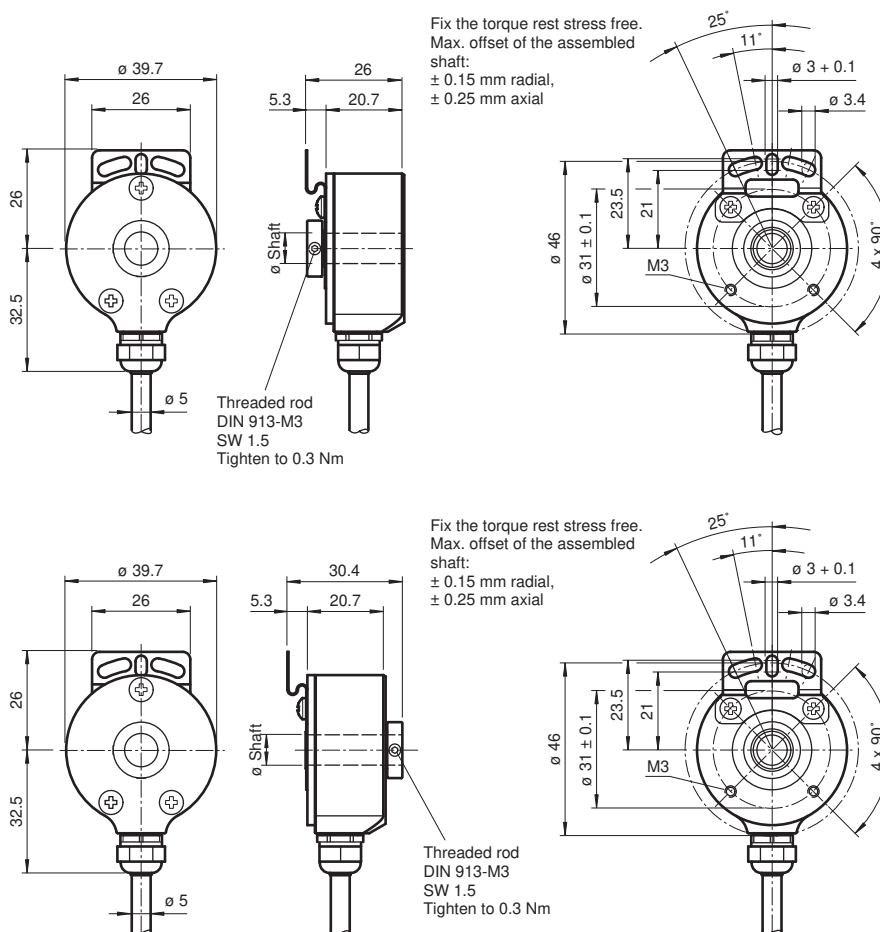

Release date: 2024-10-24 Date of issue: 2024-10-24 Filename: t36797_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


General specifications		
Detection type		photoelectric sampling
Pulse count		max. 1024
Electrical specifications		
Operating voltage	U_B	4.75 ... 30 V DC 5 V DC for RS-422
No-load supply current	I_0	max. 55 mA
Output		
Output type		push-pull, incremental or RS-422, incremental
Voltage drop	U_d	≤ 2.5 V (< 2.5 V)
Load current		max. per channel 30 mA , short-circuit protected (max. per channel 20 mA, conditionally short-circuit proof)
Output frequency		max. 100 kHz (max. 100 kHz)
Rise time		980 ns (225 ns)
De-energized delay	t_{off}	980 ns (225 ns)
Connection		
Cable		Ø5 mm, 8 x 0.08 mm ² , 2 m
Standard conformity		
Degree of protection		DIN EN 60529, IP54
Climatic testing		DIN EN 60068-2-3, no moisture condensation
Emitted interference		EN IEC 61000-6-4:2019
Noise immunity		EN IEC 61000-6-2:2019
Shock resistance		DIN EN 60068-2-27, 100 g, 6 ms
Vibration resistance		DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz
Approvals and certificates		
UL approval		cULus Listed, General Purpose, Class 2 Power Source
Maximum permissible ambient temperature		max. 60 °C (max. 140 °F)
Ambient conditions		
Operating temperature		-10 ... 70 °C (14 ... 158 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Material		
Housing		Aluminum
Flange		Aluminum
Shaft		Stainless steel
Mass		approx. 160 g
Rotational speed		max. 6000 min ⁻¹
Moment of inertia		≤ 5 gcm ²
Starting torque		≤ 1 Ncm
Dimensions		
Length		20.7 mm
Diameter		40 mm

Connection

Signal	Cable, 8-core
GND	White
+U _b	Brown
A	Green
B	Grey
$\bar{A}$	Yellow
$\bar{B}$	Pink
0	Blue
$\bar{0}$	Red
Screen	-

Operation

Signal outputs

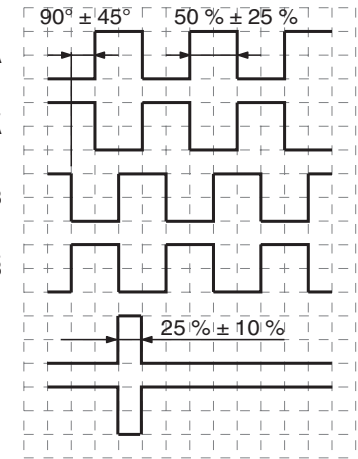

↻ cw - with view onto the shaft

Type Code

T	H	I	4	0	N	-				A	K	2	R	6	T	N	-						
---	---	---	---	---	---	---	--	--	--	---	---	---	---	---	---	---	---	--	--	--	--	--	--

Pulse count 25, 50, 60, 100, 150, 180, 200, 250, 360, 400, 500, 600, 1000, 1024

Temperature range
N normal

Output switching
T 4,75 V ... 30 V, push-pull

Signal output
6 A + B + 0 and $\bar{A}$ + $\bar{B}$ + $\bar{0}$


Exit position
R radial

Connection type
K2 cable Ø5 mm, 8 x 0.08 mm², 2 m

Flange type
A Hollow shaft

Shaft dimensions
0S Hollow shaft Ø6 mm, clamping ring at flange side

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

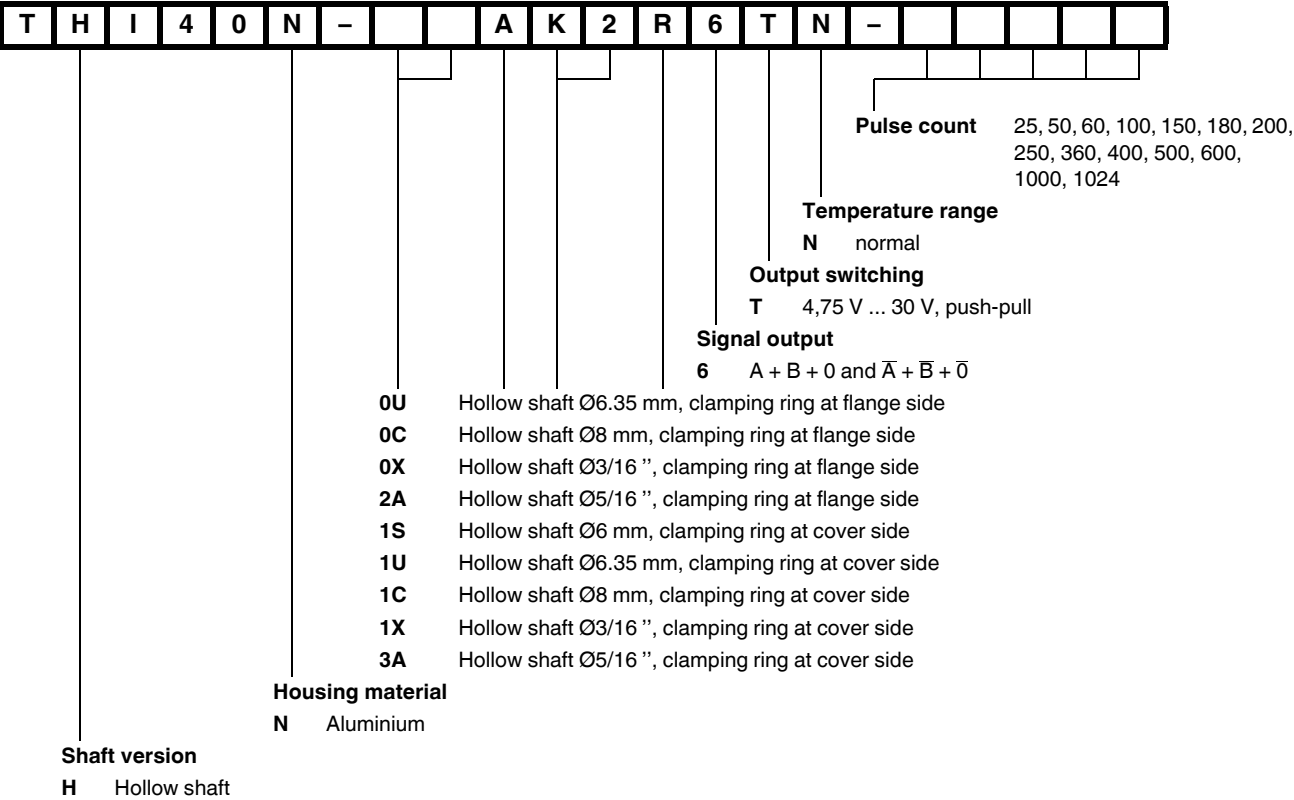

Release date: 2024-10-24 Date of issue: 2024-10-24 Filename: t36797_eng.pdf