

**THREADED STEM FITTING**

**220 BIA**

Light Duty Institutional Castor **SERIES**  
35 - 90 KGS




**Castor**

**220**  
Bracket made of pressed steel. Double ballrace swivel head  
Metal parts: Zinc plated

**Wheel**

**BIA** Blue/Grey Rubber  
Non marking, plain bearing with steel threadguards  
Hardness: 75+ Shore A  
Temperature range: 20°C + 60°C

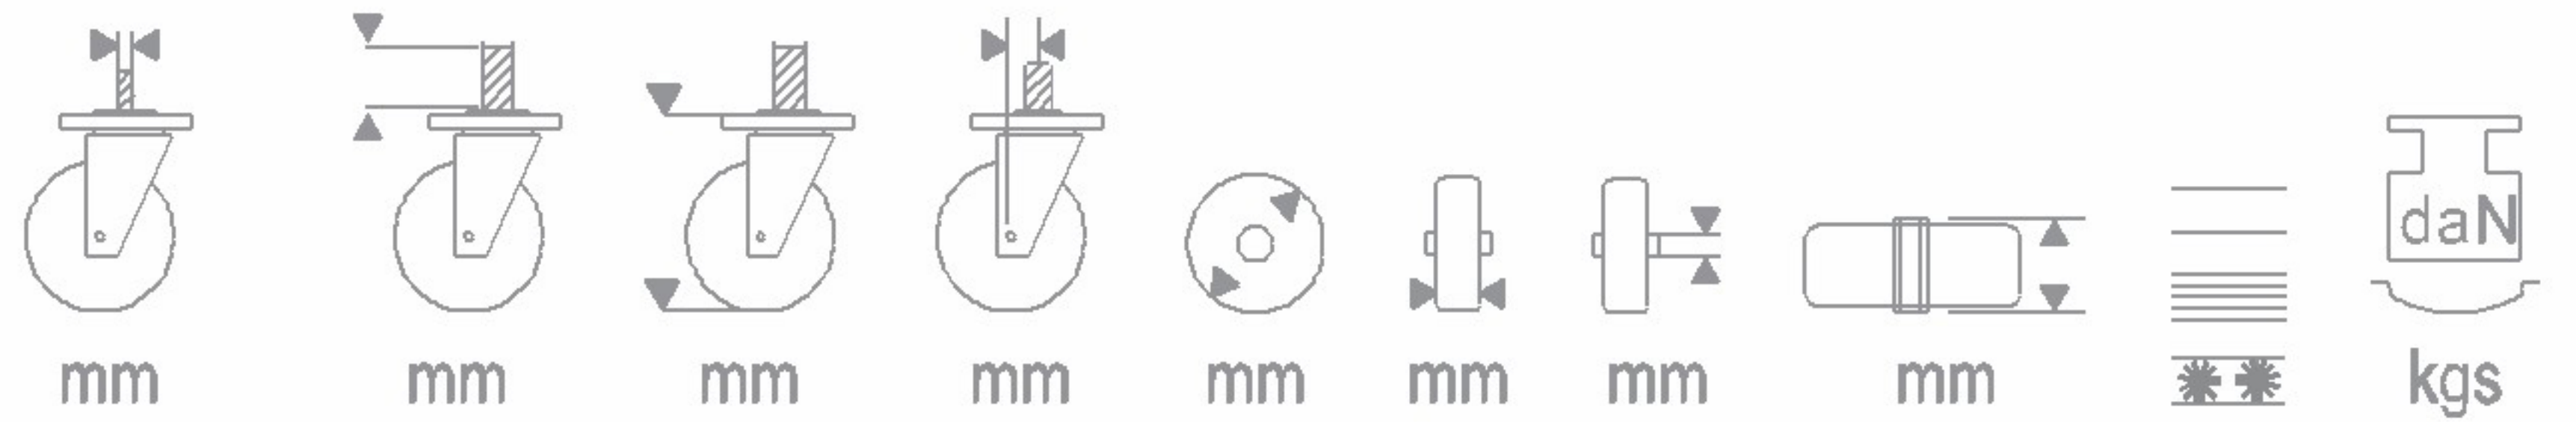

	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	daN	kgs
<b>221 BIA 050 T09</b>	1/2"-20UNF	14	72.5	23	50	16	8.2	22.3	---	---	---	---	35
<b>221 BIA 075 T10</b>	1/2"-20UNF	25	101	30	75	20	10.2	25	---	---	---	---	50
<b>221 BIA 100 T10</b>	1/2"-20UNF	25	134	38	100	25	12.2	30.4	---	---	---	---	70
<b>221 BIA 125 T10</b>	1/2"-20UNF	25	161	42	125	27	12.2	30.4	---	---	---	---	90



<b>223 BIA 050 T09</b>	1/2"-20UNF	14	72.5	23	50	16	8.2	22.3	---	---	---	---	35
<b>223 BIA 075 T10</b>	1/2"-20UNF	25	101	30	75	20	10.2	25	---	---	---	---	50
<b>223 BIA 100 T10</b>	1/2"-20UNF	25	134	38	100	25	12.2	30.4	---	---	---	---	70
<b>223 BIA 125 T10</b>	1/2"-20UNF	25	161	42	125	27	12.2	30.4	---	---	---	---	90



Table: Various threaded stem fittings available on request

T01	M10	x 15mm
T02	3/8 - 16 UNC	x 15mm
T03	M10	x 25mm P = 1.5
T04	M12	x 25mm P = 1.75
T05	M16	x 25mm P = 2.0
T06	5/8-11 UNC	x 30mm
T07	1/2-12 BSW	x 30mm
T08	1/2-12 UNC	x 1"
T09	1/2-20 UNF	x 14mm
T10	1/2-20 UNF	x 25mm

T11	M10	x 30mm P = 1.50
T12	M12	x 30mm P = 1.75
T16	M16	x 30mm P = 2.0
T17	M16	x 40mm
T21	3/8 - 16 UNC	x 1"
T22	1/2-13 UNC	x 1"
T24	M12	x 40mm
T25	M12	x 50mm
T26	M12	x 60mm
T83	M8	x 15mm
T93	1/2" - 20 UNF	x 15mm