
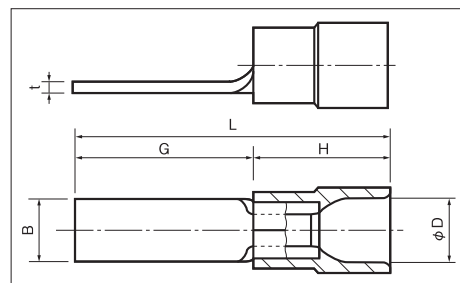


INSULATED BLADE TERMINALS (BT TYPE) TMEN : Nylon

B

RoHS 10
See page 2

RoHS 10
Yellow Nylon
See page 2


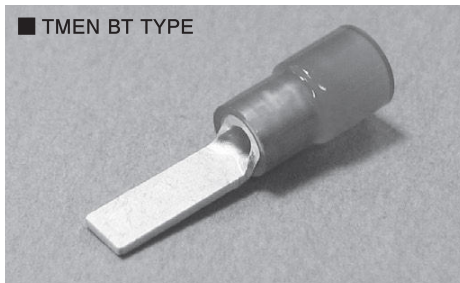


Non stock item / Please contact us for minimum order quantities and lead time.

PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX	
	B	t	L	G	H	φD	STRANDED mm ²	AWG	HAND TOOL No.				
									TOOL BODY No.	DIES No.			
TMEN BT-1.25-9-1 ○	2.2	0.75	19.0	9.0	10.0	4.1	0.3 1.65	22-16	NH 11 NH 32	NA 10 NA 3	N10 11 N3 11	RED TRANSLUCENT	1,000 (100×10)
TMEN BT-1.25-9 ○	2.8		19.1	9.1									
TMEN BT-1.25-10-1 ○	2.2		20.5	10.5									
TMEN BT-1.25-10 ○	3.4		20.3	10.3									
TMEN BT-1.25-11 ○	3.0		21.2	11.2									
TMEN BT-1.25-13	3.4		23.0	13.0									
TMEN BT-1.25-14 ○	3.0		24.6	14.6									
TMEN BT-1.25-18 ○	2.2		28.5	18.5									
TMEN BT-2-9-1 ○	2.2	0.85	19.0	9.0	10.0	4.6	1.04 2.63	16-14	NH 12 NH 32	NA 10 NA 3	N10 12 N3 12	BLUE TRANSLUCENT	1,000 (100×10)
TMEN BT-2-9 ○	2.8		19.1	9.1									
TMEN BT-2-13 ○	4.6		23.0	13.0									
TMEN BT-2-18 ○	2.2		28.5	18.5									
TMEN BT-5.5-10 ○	2.8	0.95	24.0	10.0	14.0	6.8	2.63 6.64	12-10	NH 13	NA 10 NA 3	N10 13 N3 13	YELLOW TRANSLUCENT	100
TMEN BT-5.5-13 ○	4.5		27.0	13.0									
TMEN BT-5.5-18 ○	4.5		32.0	18.0									

RoHS 10
See page 2

RoHS 10
Yellow Nylon
See page 2

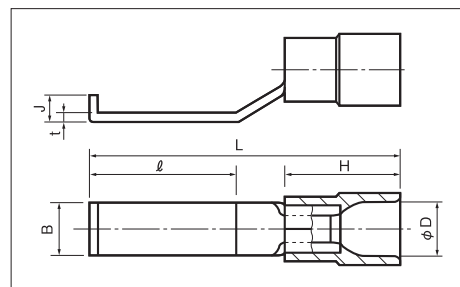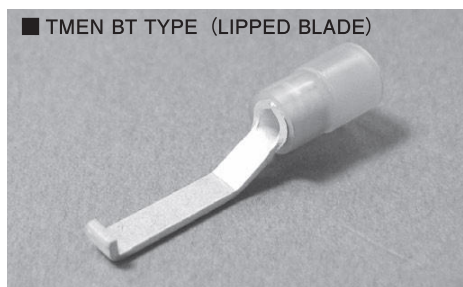

Non stock item / Please contact us for minimum order quantities and lead time.

PART NUMBER	DIMENSIONS mm							WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	B	t	ℓ	L	J	H	φD	STRANDED mm ²	AWG	HAND TOOL No.	DIES No.		
										TOOL BODY No.			
TMEN BT-1.25-17 ○	3.0	0.75	12.7	27.0	2.25	10.0	4.1	0.3 1.65	22-16	NH 11 NH 32 NA 10 N10 11 NA 3 N3 11		RED TRANSLUCENT	1,000 (100×10)
TMEN BT-2-17 ○		0.85			2.30			4.6		1.04 2.63	16-14		
TMEN BT-5.5-17-1 ○	4.6	0.95		31.0	2.45	14.0	6.8	2.63 6.64	12-10	NH 13 NA 10 N10 13 NA 3 N3 13		YELLOW TRANSLUCENT	100

NOTE 1) ○ : UL/CSA

2) Refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire and Nylon insulated products.

3) TMD & TMDEN Type are also available, see page 42.