
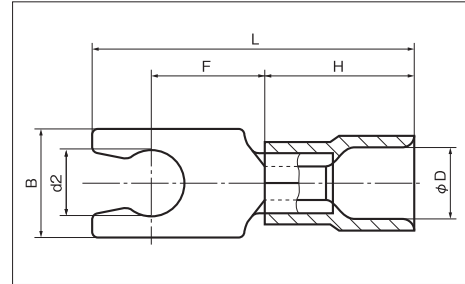


INSULATED PIN TERMINALS (TC TYPE)

TGV
TGWV : Vinyl
TMEV

■ TMEX (LOCKING SPADE)

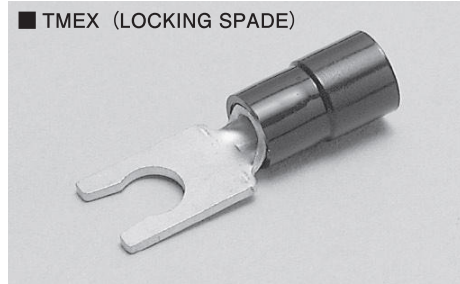

RoHS 10


See page 2

PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	d2	B	L	F	H	φD	STRANDED mm ²	AWG	HAND TOOL No.	TOOL BODY No. DIES No.		
TMEX 1.25LY-3S ○	3.2	6.4	19.5	6.6	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32 NA 10 NA 3	N10 11 N3 11	RED	1,000 (100×10)
TMEX 1.25LY-3.5S ○	3.7											
TMEX 1.25LY-4S ○	4.3	7.1	21.5	7.6								
TMEX 1.25LY-5S ○	5.3	8.4	22.5	8.5								
TMEX 2LY-3S ○	3.2	6.4	19.5	6.6	10.0	4.6	1.04 ∩ 2.63	16-14	NH 12 NH 32 NA 10 NA 3	N10 12 N3 12	BLUE	1,000 (100×10)
TMEX 2LY-3.5S ○	3.7											
TMEX 2LY-4S ○	4.3	7.1	21.5	7.6								
TMEX 2LY-5S ○	5.3	8.4	22.5	8.5								
TMEX 5.5LY-3.5S ○	3.7	7.9	25.7	7.6	14.0	6.8	2.63 ∩ 6.64	12-10	NH 13 NA 10 NA 3	N10 13 N3 13	YELLOW	500 (50×10)
TMEX 5.5LY-4S ○	4.3											
TMEX 5.5LY-5S ○	5.3	8.4										

NOTE

- : UL · C-UL
- Refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire and Nylon insulated products.
- TMD & TMDEN Type are also available, see page 42.

■ TMEX (FLANGE)

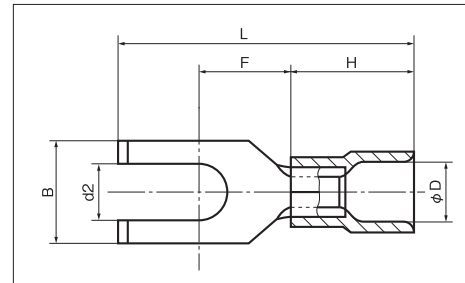

RoHS 10

See page 2

PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	d2	B	L	F	H	φD	STRANDED mm ²	AWG	HAND TOOL No.	TOOL BODY No. DIES No.		
1.25Y-3W ○	3.7	7.7	19.5	5.6	10.0	4.1	0.3~1.65	22-16	NH 11 NH 32 NA 10 NA 3	N10 11 N3 11	RED	1,000 (100×10)
TMEX 1.25Y-4W ○	4.3											
1.25Y-5W ○	5.3											
2Y-3W ○	3.7	8.0	24.0	7.3	10.0	4.6	1.04 ∩ 2.63	16-14	NH 12 NH 32 NA 10 NA 3	N10 12 N3 12	BLUE	1,000 (100×10)
TMEX 2Y-4W ○	4.3											
2Y-5W ○	5.3											

NOTE

- : UL · C-UL
- Refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire.
- TMDEN Type is also available, see page 42.

TONGUE SHAPE

