



BỘ ĐÈN LED M26/M28.V2





M26 300/9W

PHÂN BỐ QUANG




LƯỚI ĐỘ RỌI


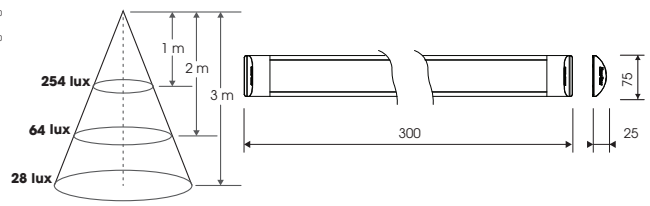


M26 600/25W

PHÂN BỐ QUANG




LƯỚI ĐỘ RỌI


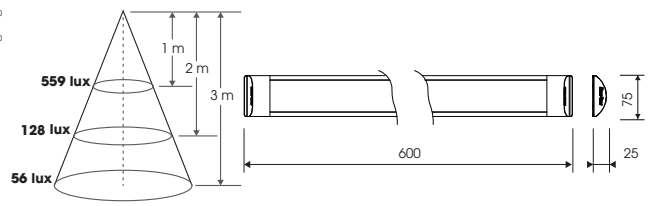


M26 1200/50W

PHÂN BỐ QUANG




LƯỚI ĐỘ RỌI


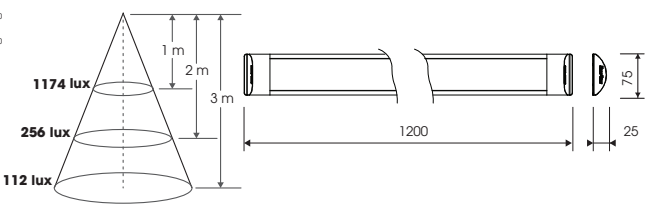


M28.V2 600/20W

PHÂN BỐ QUANG




LƯỚI ĐỘ RỌI

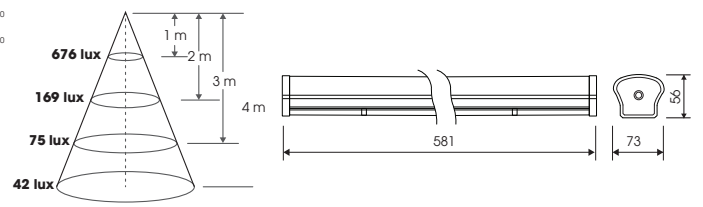


M28.V2 1200/40W

PHÂN BỐ QUANG



LƯỚI ĐỘ RỌI

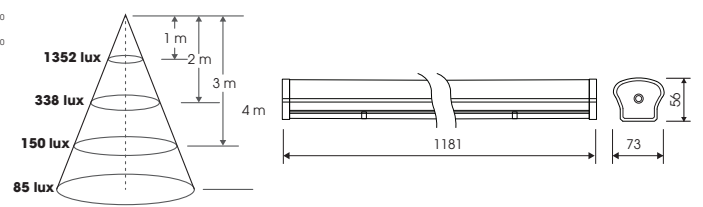

Model	Công suất	Dải điện áp hoạt động	Hệ số công suất	Hiệu suất sáng	Quang thông	Nhiệt độ màu	Chỉ số hoàn màu	Tuổi thọ	Kích thước (DxRxH)
	W	V		lm/W	lm	K		Giờ	mm
M26 300/9W	9	150÷250	0,5	77/83/83	700/750/750	3000/4000/6500	80	25000	300x75x25
M26 600/25W	25	150÷250	0,5	105/115/115	2625/2875/2875	3000/4000/6500	80	35000	600x75x25
M26 1200/50W	50	150÷250	0,5	105/115/115	5250/5750/5750	3000/4000/6500	80	35000	1200x75x25
M28.V2 600/20W	20	150÷250	0,5	100/110/110	2000/2200/2200	3000/4000/65000	80	25000	581x73x56
M28.V2 1200/40W	40	150÷250	0,5	100/110/110	4000/4400/4400	3000/4000/65000	80	25000	1181x73x56