



Figure similar

Miniature circuit breaker 230/400 V 10kA, 1-pole, C, 80 A, D=70 mm

Model	
product brand name	SETRON
product designation	Miniature circuit breaker
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with single-phase operation at AC rated value	250 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	80 A
• at 40 °C rated value	75.2 A
• at 50 °C rated value	70 A
• at 60 °C rated value	64.8 A
• at AC rated value	80 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	7 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes

• tunnel terminals bottom	Yes
product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	27 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	259.1 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Environmental footprint

Environmental Product Declaration (EPD)	Yes
global warming potential [CO ₂ eq] total	54.3 kg
global warming potential [CO ₂ eq] during manufacturing	1.06 kg
global warming potential [CO ₂ eq] during operation	53.3 kg
global warming potential [CO ₂ eq] after end of life	-0.046 kg

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	Marine / Shipping	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

[Confirmation](#)

[Transport Information](#)



[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4180-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4180-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4180-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

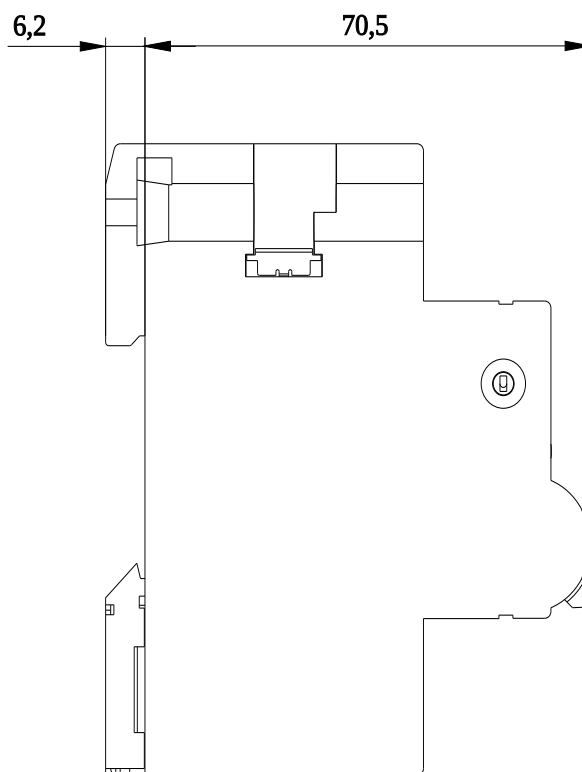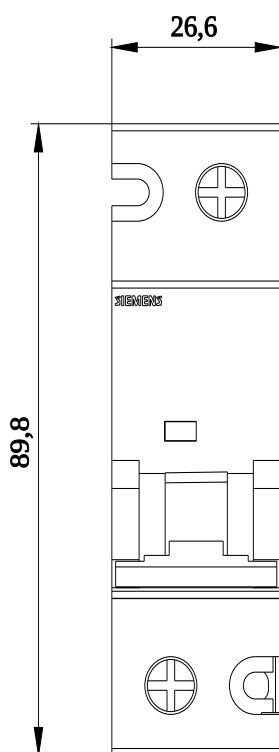

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 230/400 V 10kA, 1-pole, C, 100 A, D=70 mm

Model	
product brand name	SETRON
product designation	Miniature circuit breaker
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with single-phase operation at AC rated value	250 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	100 A
• at 40 °C rated value	92.5 A
• at 50 °C rated value	85 A
• at 60 °C rated value	77 A
• at AC rated value	100 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	8 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes

• tunnel terminals bottom	Yes
product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	27 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	259 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Environmental footprint

Environmental Product Declaration (EPD)	Yes
global warming potential [CO ₂ eq] total	54.3 kg
global warming potential [CO ₂ eq] during manufacturing	1.06 kg
global warming potential [CO ₂ eq] during operation	53.3 kg
global warming potential [CO ₂ eq] after end of life	-0.046 kg

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	Marine / Shipping	other
--------------------------	-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

[Confirmation](#)

[Transport Information](#)



[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4191-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4191-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4191-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

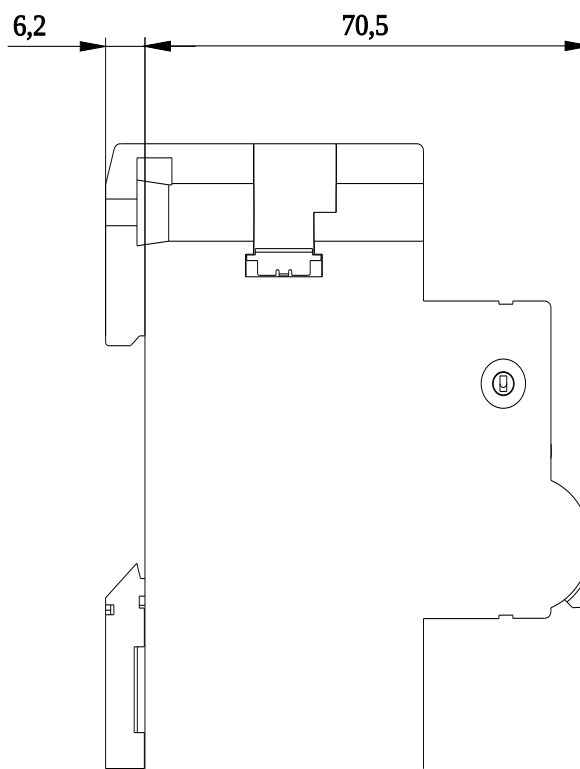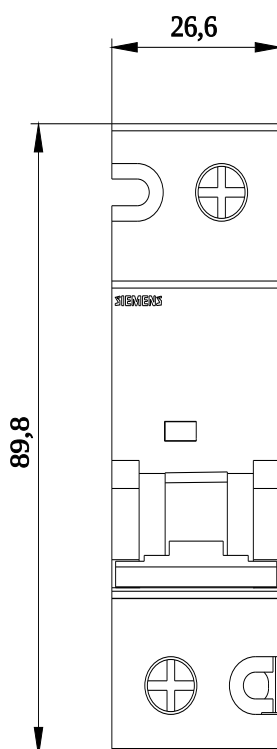

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 230/400 V 10kA, 1-pole, C, 125 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	1
design of pole	1P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with single-phase operation at AC rated value	250 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	125 A
• at 40 °C rated value	115.625 A
• at 50 °C rated value	106.25 A
• at 60 °C rated value	96.25 A
• at AC rated value	125 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	10.9 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes

• tunnel terminals bottom	Yes
product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	27 mm
depth	76 mm
installation depth	70 mm
number of modular width units	1.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	265 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Environmental footprint

Environmental Product Declaration (EPD)	Yes
global warming potential [CO ₂ eq] total	54.3 kg
global warming potential [CO ₂ eq] during manufacturing	1.06 kg
global warming potential [CO ₂ eq] during operation	53.3 kg
global warming potential [CO ₂ eq] after end of life	-0.046 kg

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	Marine / Shipping	other
--------------------------	-------------------	-------

[Confirmation](#)[Miscellaneous](#)

Railway

Dangerous goods

Environment

[Confirmation](#)[Transport Information](#)[Environmental Con-
firmations](#)[Environmental Con-
firmations](#)**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4192-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4192-7>



Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4192-7

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications
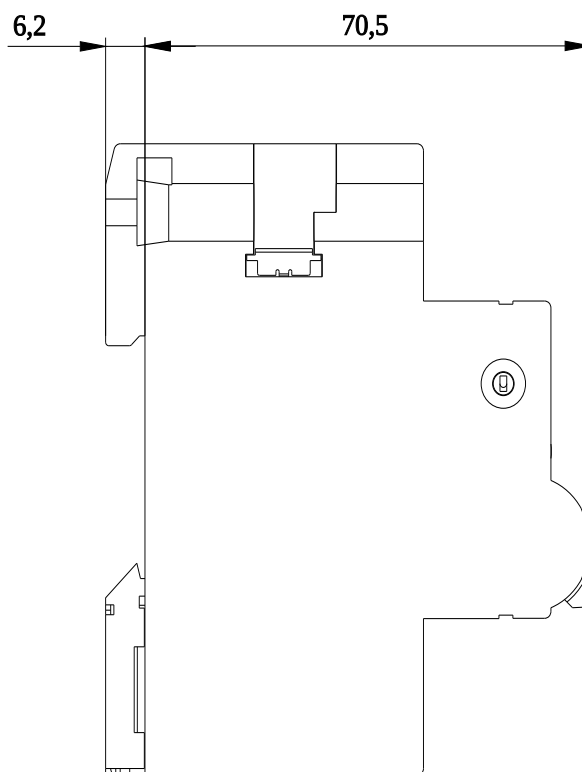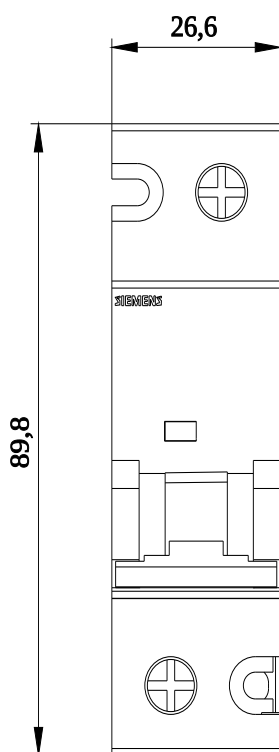
<http://www.siemens.com/specifications>

last modified:

3/12/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 2-pole, C, 80 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	2
design of pole	2P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	80 A
• at 40 °C rated value	76 A
• at 50 °C rated value	71.6 A
• at 60 °C rated value	67.2 A
• at AC rated value	80 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	7 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	54 mm
depth	76 mm
installation depth	70 mm
number of modular width units	3
fastening method	DIN rail and screw fixing
mounting position	any
net weight	518 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Miscellaneous](#)



Test Certificates

Marine / Shipping

[Miscellaneous](#)



other

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4280-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4280-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4280-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

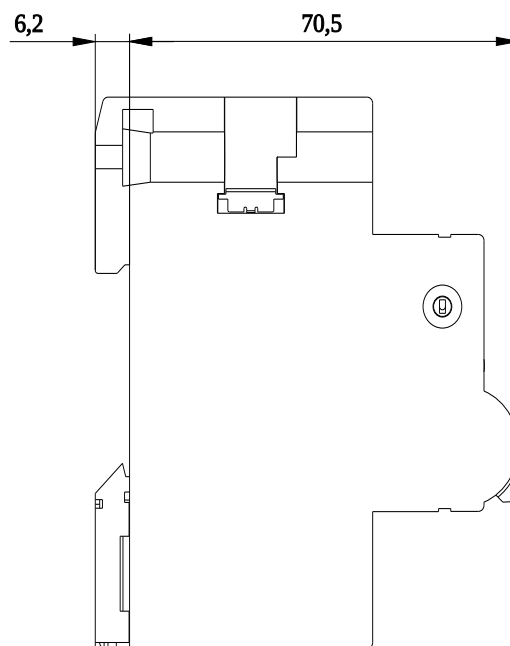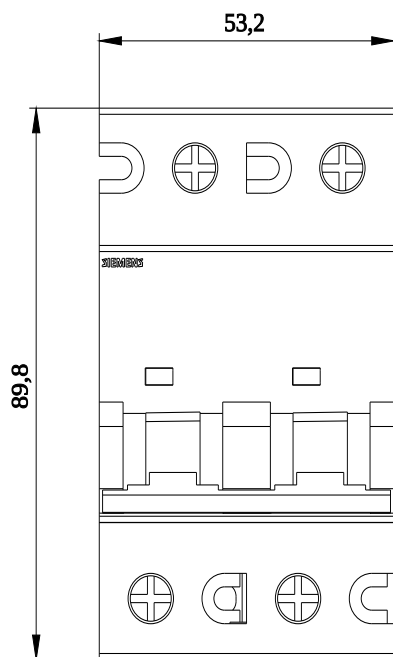

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 2-pole, C, 100 A, D=70 mm

Model	
product brand name	SETRON
product designation	Miniature circuit breaker
General technical data	
number of poles	2
design of pole	2P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	100 A
• at 40 °C rated value	95 A
• at 50 °C rated value	89.5 A
• at 60 °C rated value	84 A
• at AC rated value	100 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	8 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf·in] with screw-type terminals	
• minimum	22.1 lbf·in
• maximum	31 lbf·in
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3.5 N·m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	54 mm
depth	76 mm
installation depth	70 mm
number of modular width units	3
fastening method	DIN rail and screw fixing
mounting position	any
net weight	520 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Confirmation](#)

[Miscellaneous](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4291-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4291-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4291-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

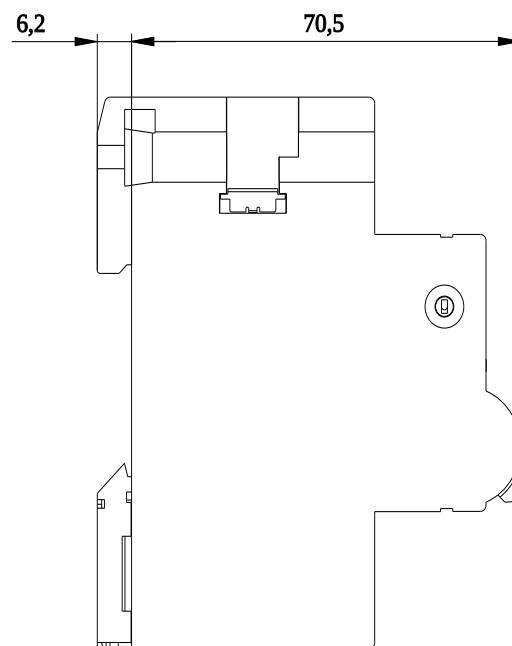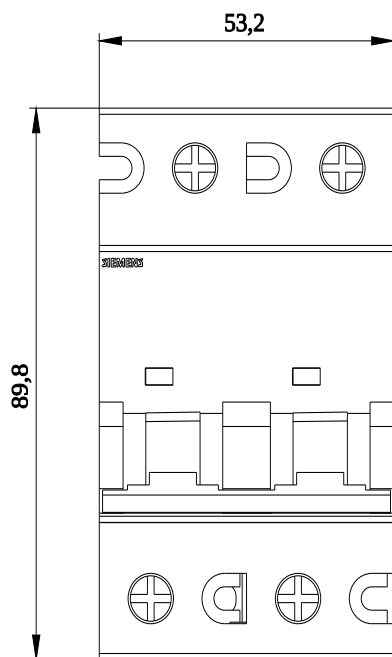

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 2-pole, C, 125 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	2
design of pole	2P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	125 A
• at 40 °C rated value	118.75 A
• at 50 °C rated value	111.875 A
• at 60 °C rated value	105 A
• at AC rated value	125 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	10.9 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf·in] with screw-type terminals	
• minimum	22.1 lbf·in
• maximum	31 lbf·in
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3.5 N·m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	54 mm
depth	76 mm
installation depth	70 mm
number of modular width units	3
fastening method	DIN rail and screw fixing
mounting position	any
net weight	524 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4292-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4292-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4292-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

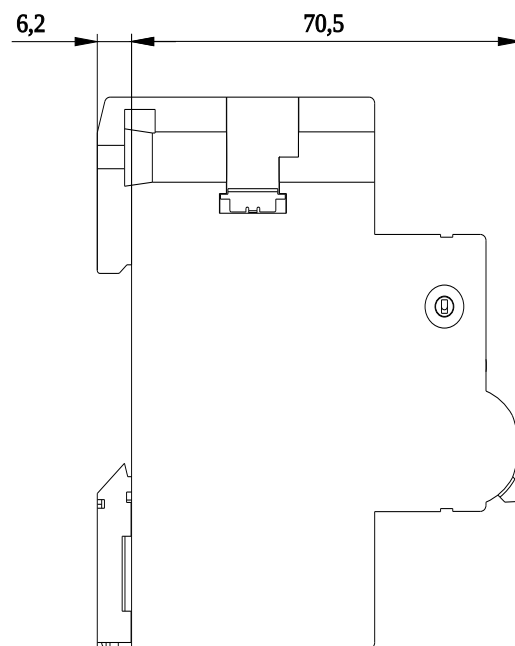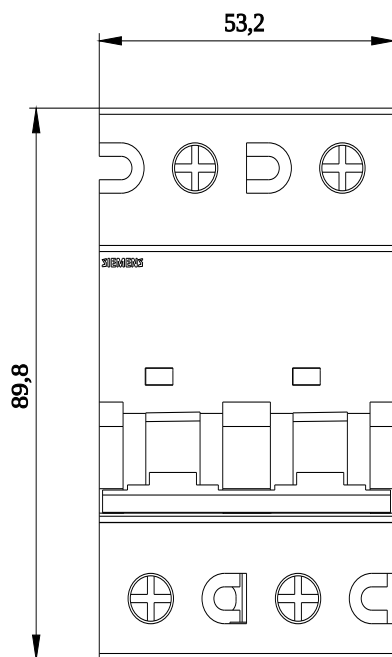

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 3-pole, C, 80 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	3
design of pole	3P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	80 A
• at 40 °C rated value	76 A
• at 50 °C rated value	71.6 A
• at 60 °C rated value	67.2 A
• at AC rated value	80 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	7 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf·in] with screw-type terminals	
• minimum	22.1 lbf·in
• maximum	31 lbf·in
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3.5 N·m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	81 mm
depth	76 mm
installation depth	70 mm
number of modular width units	4.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	759 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4380-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4380-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4380-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

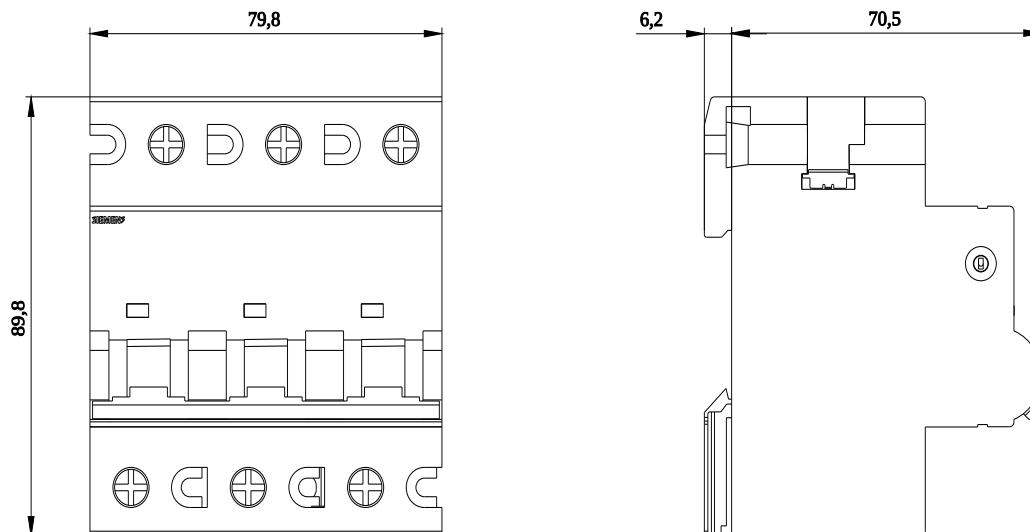

5SP4380-6, 5SP4380-7, 5SP4380-8, 5SP4391-6,
5SP4391-7, 5SP4391-8, 5SP4392-6, 5SP4392-7

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 3-pole, C, 100 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	3
design of pole	3P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	100 A
• at 40 °C rated value	95 A
• at 50 °C rated value	89.5 A
• at 60 °C rated value	84 A
• at AC rated value	100 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	8 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	81 mm
depth	76 mm
installation depth	70 mm
number of modular width units	4.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	763 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval Marine / Shipping other



[Miscellaneous](#)

[Confirmation](#)

Railway Dangerous goods Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4391-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4391-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4391-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

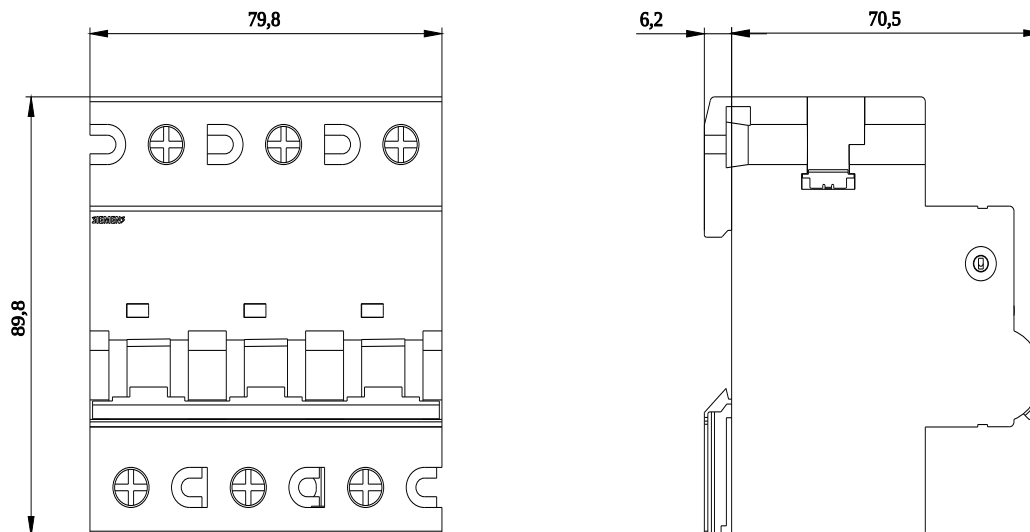

5SP4380-6, 5SP4380-7, 5SP4380-8, 5SP4391-6,
5SP4391-7, 5SP4391-8, 5SP4392-6, 5SP4392-7

last modified:

7/5/2024



Figure similar

Miniature circuit breaker 400 V 10kA, 3-pole, C, 125 A, D=70 mm

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	3
design of pole	3P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	125 A
• at 40 °C rated value	118.75 A
• at 50 °C rated value	111.875 A
• at 60 °C rated value	105 A
• at AC rated value	125 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	10.9 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	81 mm
depth	76 mm
installation depth	70 mm
number of modular width units	4.5
fastening method	DIN rail and screw fixing
mounting position	any
net weight	789 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	Marine / Shipping	other
---------------------------------	--------------------------	--------------



[Miscellaneous](#)

[Confirmation](#)

Railway	Dangerous goods	Environment
----------------	------------------------	--------------------

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4392-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4392-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4392-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

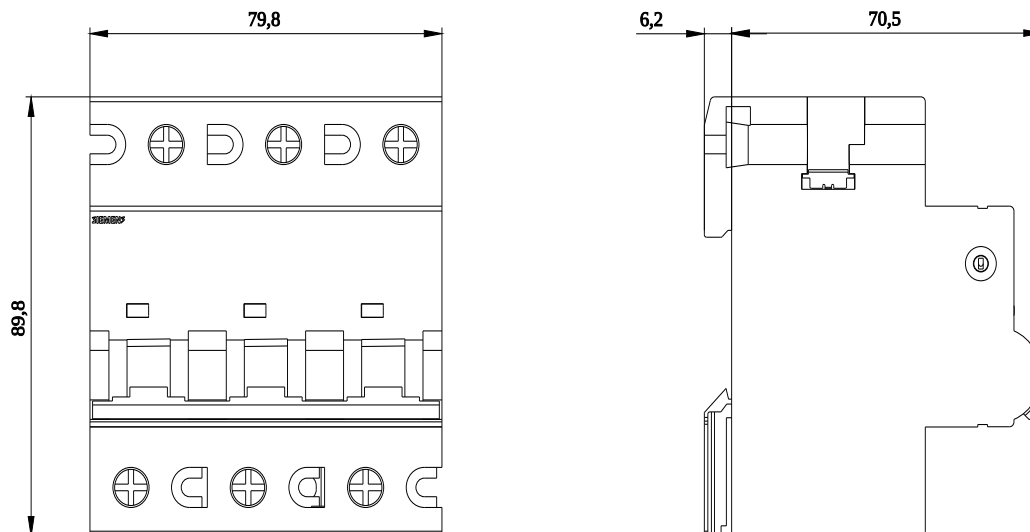

5SP4380-6, 5SP4380-7, 5SP4380-8, 5SP4391-6,
5SP4391-7, 5SP4391-8, 5SP4392-6, 5SP4392-7

last modified:

7/5/2024 

Miniature circuit breaker 400 V 10kA, 4-pole, C, 80 A, D=70 mm



Figure similar

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	4
design of pole	4P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	80 A
• at 40 °C rated value	76 A
• at 50 °C rated value	71.6 A
• at 60 °C rated value	67.2 A
• at AC rated value	80 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	7 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	108 mm
depth	76 mm
installation depth	70 mm
number of modular width units	6
fastening method	DIN rail and screw fixing
mounting position	any
net weight	1 015 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4480-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4480-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4480-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

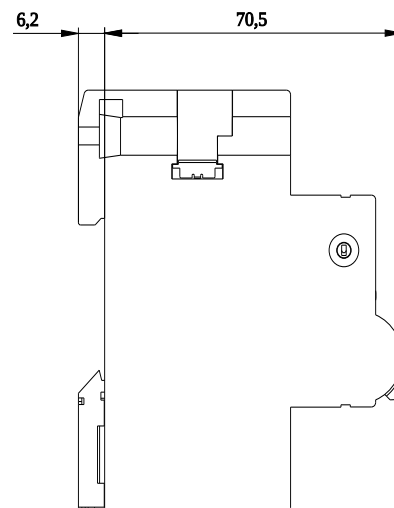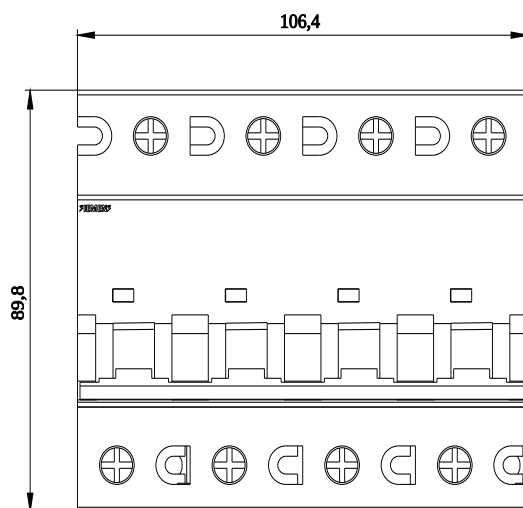

5SP4480-6, 5SP4480-7, 5SP4480-8, 5SP4491-6,
5SP4491-7, 5SP4491-8, 5SP4492-6, 5SP4492-7

last modified:

7/5/2024

Miniature circuit breaker 400 V 10kA, 4-pole, C, 100 A, D=70 mm



Figure similar

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	4
design of pole	4P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	100 A
• at 40 °C rated value	95 A
• at 50 °C rated value	89.5 A
• at 60 °C rated value	84 A
• at AC rated value	100 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	8 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf-in] with screw-type terminals	
• minimum	22.1 lbf-in
• maximum	31 lbf-in
tightening torque with screw-type terminals	
• minimum	2.5 N-m
• maximum	3.5 N-m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	108 mm
depth	76 mm
installation depth	70 mm
number of modular width units	6
fastening method	DIN rail and screw fixing
mounting position	any
net weight	1 026 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4491-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4491-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4491-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

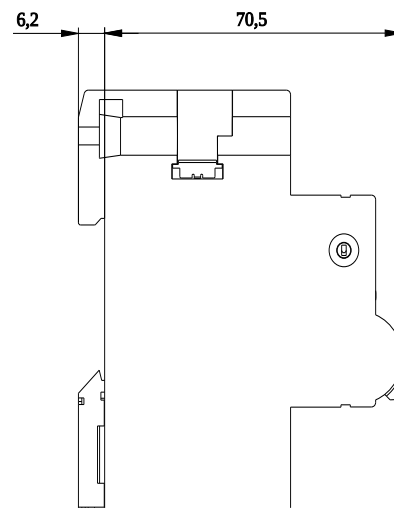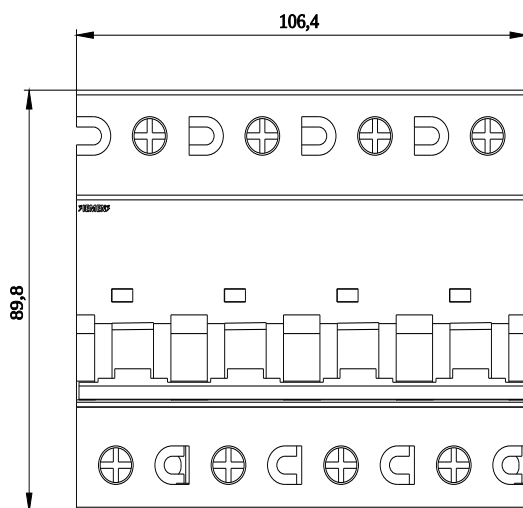

5SP4480-6, 5SP4480-7, 5SP4480-8, 5SP4491-6,
5SP4491-7, 5SP4491-8, 5SP4492-6, 5SP4492-7

last modified:

7/5/2024

Miniature circuit breaker 400 V 10kA, 4-pole, C, 125 A, D=70 mm



Figure similar

Model	
product brand name	SENTRON
product designation	Miniature circuit breaker
General technical data	
number of poles	4
design of pole	4P
tripping characteristic class	C
mechanical service life (operating cycles) typical	10 000
overvoltage category	3
degree of pollution	3
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui)	
• at AC rated value	440 V
• with multi-phase operation at AC rated value	440 V
operational current	
• at 30 °C rated value	125 A
• at 40 °C rated value	118.75 A
• at 50 °C rated value	111.875 A
• at 60 °C rated value	105 A
• at AC rated value	125 A
Supply voltage	
supply voltage at AC	400 V
value range of the supply voltage frequency	50/60 Hz
Protection class	
protection class IP	IP20 with connected conductors, IP40 in the area of the handle with distribution cover
Breaking Capacity	
switching capacity current	
• according to EN 60898 rated value	10 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	10.9 W
suitability for operation	Infrastructure / Industry
Product details	
product feature touch protection	Yes
product component	
• tunnel terminals top	Yes
• tunnel terminals bottom	Yes

product feature	
• properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes
product extension installable supplementary devices	Yes

Connections

connectable conductor cross-section solid	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section stranded	
• minimum	25 mm ²
• maximum	50 mm ²
connectable conductor cross-section finely stranded with core end processing	
• minimum	25 mm ²
• maximum	35 mm ²
AWG number as coded connectable conductor cross section	
• minimum	3
• maximum	1
tightening torque [lbf·in] with screw-type terminals	
• minimum	22.1 lbf·in
• maximum	31 lbf·in
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3.5 N·m
position of power supply cord	Any

Mechanical Design

height	90 mm
width	108 mm
depth	76 mm
installation depth	70 mm
number of modular width units	6
fastening method	DIN rail and screw fixing
mounting position	any
net weight	1 031 g

Environmental conditions

influence of the surrounding temperature	Max. 95% rel. humidity
shock resistance according to IEC 60068-2-27	150m/s ² at 11ms half-sine
vibration resistance according to IEC 60068-2-6	50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
ambient temperature during storage	
• minimum	-40 °C
• maximum	75 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval

Marine / Shipping

other



[Miscellaneous](#)

[Confirmation](#)

Railway

Dangerous goods

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SP4492-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SP4492-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SP4492-7

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

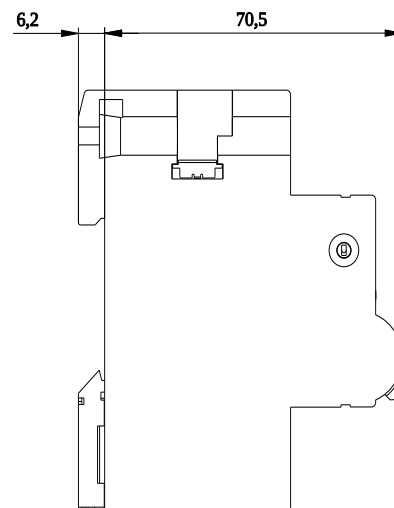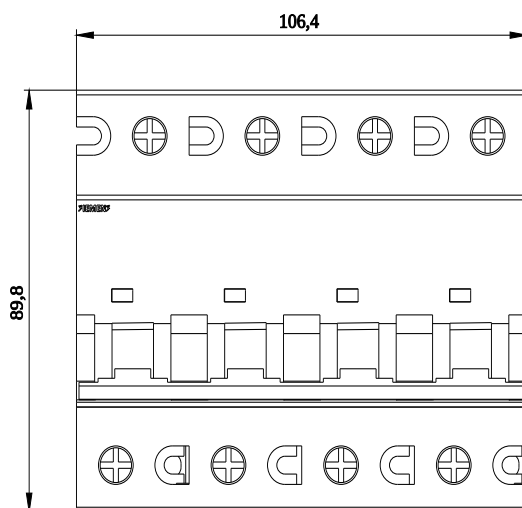

5SP4480-6, 5SP4480-7, 5SP4480-8, 5SP4491-6,
5SP4491-7, 5SP4491-8, 5SP4492-6, 5SP4492-7

last modified:

7/5/2024

