

SR series

Selector switch (non-illuminating, illuminating)

- Detachable type of actuator and contact part (Ø16 panel mounting type)
- Contact part composed of 1a1b and 2a2b
- Light source : incandescent lamp and LED selection
- Various actuator such as round, square, rectangular type and etc



●● Suffix code

Model	Code					Description
SRS-	☐	☐	☐	☐	☐	Ø16 selector switch
Illumination	F					Non-illuminating type
	X					Illuminating type
Actuator type		1				Round type
		2				Square type
		3				Rectangle type
Number of positions		1				2 positions momentary operation
		2				2 positions alternative operation
		3				3 positions alternative operation
		6				3 positions momentary operation
Contact composition		1				1a1b Contact
		2				2a2b Contact
Light source and voltage (Only illuminating type assigned)		1				6.3 V Incandescent lamp
		2				12 V Incandescent lamp
		3				24 V Incandescent lamp
		4				12 V Luminescent diode (LED)
		5				24 V Luminescent diode (LED)
Color of actuator (Only illuminating type assigned)			R			R (Red), G (Green), Y (Yellow), W (White), B (Blue)

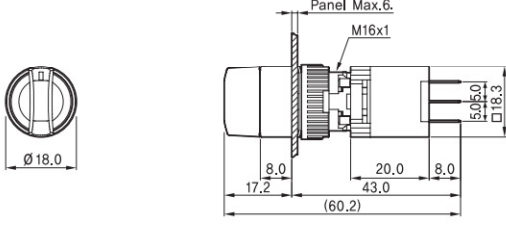
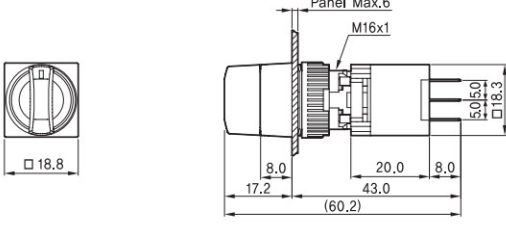
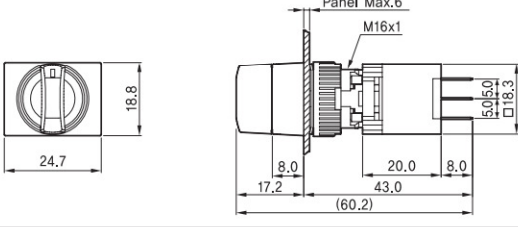
●● Actuator of positions and angle

Position selection	2 positions automatic	2 positions manual	3 positions automatic	3 positions manual
Operation angle				

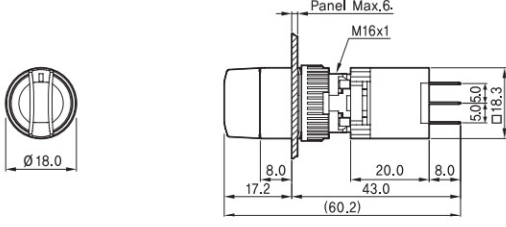
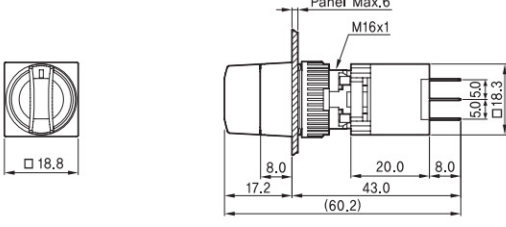
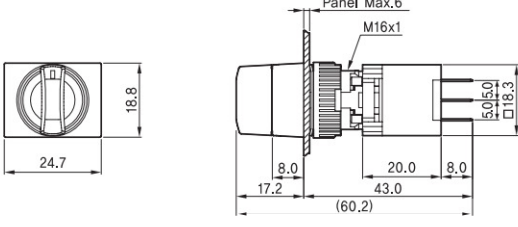
SR series

●● Dimension (unit : mm)

■ Non-illuminating type

Model	Design	Dimension
SRS-F1□□		
SRS-F2□□		
SRS-F3□□		

■ Illuminating type

Model	Design	Dimension
SRS-X1□□□G		
SRS-X2□□□Y		
SRS-X3□□□B		

Control
switch
Combination
display light

Power switch
Main switch
Cam switch

Limit switch
Micro switch

Hoist switch
Foot switch
Mono lever switch

Signal tower
Signal light

Buzzer
Terminal block
Fuse holder

Control box
Cable connector

Discontinued
Products