


Description of Non-insulated fork spade terminal

- Non-insulated fork spade terminal are also named U-Type wire connector or electrical crimp terminal. crimp terminal are used to terminate stranded wires.
- Crimp terminal is made of tin plated copper,uninsulated ferrules are designed to form neat end terminations to multi-strand cables or wires.
- Smooth funnel entry assists in wire insertion.
- Specifically designed to aid in termination of extra flexible fine stranded conductor,provides enhanced flexibility relating to wire termination and management.

Non-Insulated Spade Terminals

Material

Terminal Body: Copper
Plating: Tin

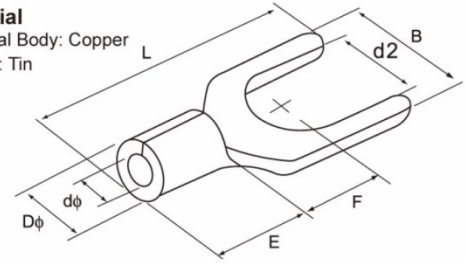

Unit: mm

Type	USA stud size	AWG	mm ²	lmax	d2	B	Dø	dø	E	F	L
SNB1.25-3	#4	22-16	0.5-1.5	19A	3.2	5.7	3.4	1.7	4.8	6.5	16.0
SNB1.25-4	#8			19A	4.3	6.4					
SNB1.25-5	#10			19A	5.3	8.1					
SNB1.25-6	1/4			19A	6.5	9.5					
SNB2-3	#4	16-14	1.5-2.5	27A	3.2	5.7	4.1	2.3	4.8	6.5	16.0
SNB2-4	#8			27A	4.3	6.4					
SNB2-5	#8			27A	5.3	8.1					
SNB2-6	1/4			27A	6.5	9.5					
SNB3.5-3	#4	14-12	2.5-4	37A	3.2	5.7	5.0	3.0	6.0	7.0	18.3
SNB3.5-4	#8			37A	4.3	8.0					
SNB3.5-5	#8			37A	5.3	8.0					
SNB3.5-6	1/4			37A	6.5	12.0				12.1	21.5
SNB5.5-3.5	#6	12-10	4-6	48A	3.7	8.3	5.6	3.4	6.8	7.5	19.5
SNB5.5-4	#8			48A	4.3	8.3					
SNB5.5-5	#10			48A	5.3	9.0					
SNB5.5-6	1/4			48A	6.5	9.0					