

51 SWO Open Impeller Centrifugal Pump

SWO

OPEN IMPELLER CENTRIFUGAL PUMP

- Liquid temperature : 0~70°C / 32~158°F
- HP range : 2~4HP / 1.5~3KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection class : IP55
- Maximum suction : 2M

Features

1. All the material is stainless steel. No rusty issue.
2. Stainless steel close impeller & High head.
3. It can endure light acid and alkali.

Applications

1. The environment containing suspended solid
2. Water circulating and cleaning system
3. Light PH sites


Specification

Model No.	Output		Outlet		Pass Solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head						Max Head(M)	Weight Kg
	HP	KW	mm	inch			4M	6M	8M	10M	12M	14M		
SWO-220(T)	2	1.5	50	2"	8	570	550	500	430	330	210	210	14	20
SWO-320(T)	3	2.2	50	2"	8	660	640	610	560	490	400	270	16	23
SWO-420(T)	4	3	50	2"	8	730	710	685	650	610	560	480	20	26

Remarks: "T" is means three phase

Dimension

Model	Dimension							
	L	L1	L2	L3	W	W1	H	H1
SWO-220(T)	378	255	123	82	193	190	242	125
SWO-320(T)	413	255	158	82	193	190	242	125
SWO-420(T)	430	255	175	82	193	190	242	125

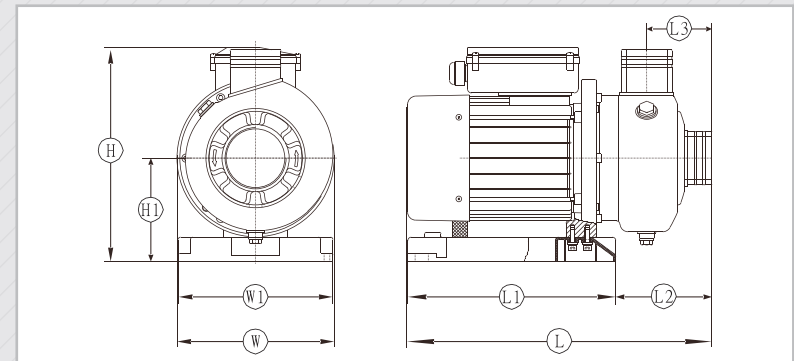

Curve

