


PIN TERMINALS (TC TYPE)

■ PIN

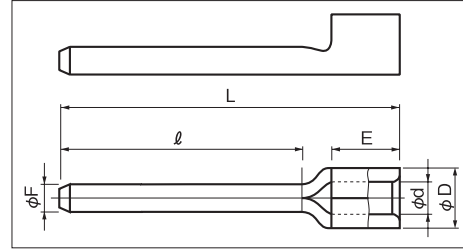

RoHS 10
See page 2

A

PART NUMBER		DIMENSIONS mm					WIRE RANGE			TOOL No.		STD QTY/BOX
		ϕF	l	L	E	ϕD	ϕd	SOLID mm	STRANDED mm ²	AWG	HAND TOOL No. TOOL BODY No. DIES No.	
TC 0.3-9.5	○	1.0	9.5	15.3	4.5	2.2	1.0	—	0.2~0.5 0.3~0.5 UL·CSA USE	24~20 22~20 UL·CSA USE	NH 69 NA 3 N3 70	1,000
TC 1.25-11	○	1.9	11.0	17.5	4.5	3.4	1.7	0.57 ∩ 1.44	0.25 ∩ 1.65	22-16	NH 1 NH 61A NH 69 NA 10 N10 01 NA 3 N3 7	1,000 (100×10)
TC 1.25-11S	○	1.5		17.5								
TC 1.25-16	○	1.9	16.0	22.0								
TC 1.25-16S	○	1.5		22.0								
TC 1.25-20	○	1.9	20.0	26.0								
TC 1.25-20S	○	1.5		26.0								
TC 2-11	○	1.9	11.0	17.5	4.5	4.2	2.3	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	NH 1 NH 9 NH 61A NH 69 NA 10 N10 02 NA 3 N3 7	1,000 (100×10)
TC 2-11S	○	1.5		17.5								
TC 2-16	○	1.9	16.0	22.0								
TC 2-16S	○	1.5		22.0								
TC 2-20	○	1.9	20.0	26.0								
TC 2-20S	○	1.5		26.0								
TC 3.5-11S	○	1.9	11.0	21.0	6.0	5.1	3.0	1.82 ∩ 2.40	2.63 ∩ 4.60	12	NH 1 NH 9 NA 10 N10 03 NA 3 N3 7	1,000 (100×10)
TC 5.5-11	○	2.7	11.0	21.0	6.5	5.6	3.4	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	NH 1 NH 9 NA 10 N10 03 NA 3 N3 7	1,000 (100×10)

NOTE

- 1) ○ : UL, CSA
- 2) Refer to page 14 for UL/CSA and proper strip length of wire.
- 3) Refer to page 38 for insulation cap.