


# LOW TORQUE AC-TYPE SEMI-AUTOMATIC TRIGGER START CLUTCH TYPE SERIES




## SK-2 Series [SK-205LS, SK-215LS, SK-2205LS, SK-2215LS]



### External Dimension

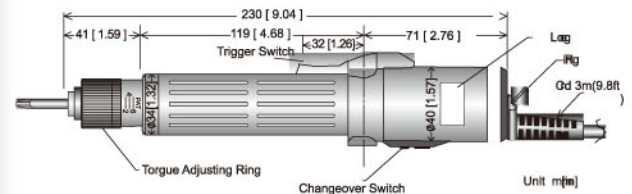

### Torque Range Chart

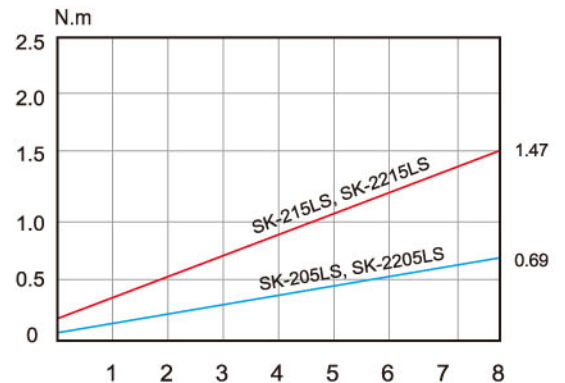

- AC plug; no adaptor needed.
- Inner dual insulator which is conforming to the international safety standard. 100% safe, light and handy, easy to use and appearance fits in with ergonomics logic.
- Precise torque. It is adjustable from small to large but speed stays constant. The rotation speed is fast and also light and handy. Boost productively.
- Best choice for general electronic appliances, such as lamps, small home appliances, toys and etc.

### Specifications

Model		SK-205LS	SK-215LS	SK-2205LS	SK-2215LS
Input Voltage		AC110~120V 50/60Hz		AC220~240V 50/60Hz	
Torque	(kgf.cm)	0.5~7	2~15	0.5~7	2~15
	(Lbf.in)	0.44~6.10	1.77~13	0.44~6.10	1.77~13
	(N.m)	0.05~0.69	0.2~1.47	0.05~0.69	0.2~1.47
Repeatable Torque Accuracy(%)		±5%			
Torque Adjustment		Stepless			
Free Speed(r.p.m)		1100	1100	1000	1000
Power Consumption		0.3A	0.3A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.0~4.0	1.6~3.0	2.0~4.0
	Tapping Screw	1.4~2.0	2.0~3.0	1.4~2.0	2.0~3.0
Weight(g)		480			
Length(mm)		230			
ESD(Anti-Static)		—			
UL(CUL)		—			
CE		—			
RoHS		✓			
Bit Type					

### Accessories

<b>Torque Fixing Ring</b> KC-3 	<b>Torque Adjuster</b> KW-3 
<b>Suspension Rack</b> KH-4 	<b>Spring Balancer</b> KL-1200 