





### External Dimension

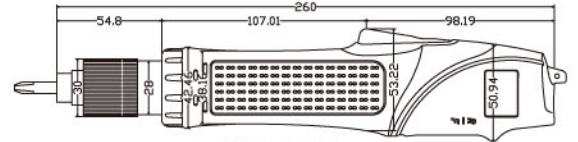


SKD-7000L

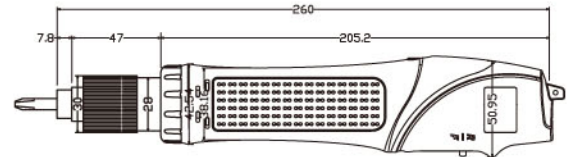

SKD-7000P

### Torque Range Chart

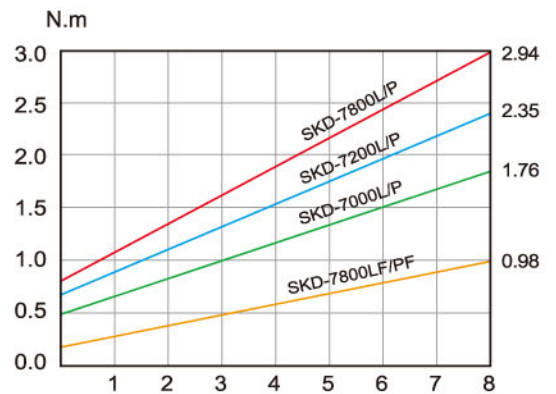

- Low-voltage automatic clutch electric screwdrivers with power controllers, can keep long-time operation, high stability, no influence by fluctuated voltage.
- Be operate with torque fixing ring (KC-2) most applied to office machines, PC peripherals.
- High technology motor, made by extra strong magnet, fast start and low electric current. Fan and vent let motors fast heat emission, low temperature for successive using.
- Clutch is made by alloy steel materials made in JAPAN, solid and endurance, fatigue-resistant, high stability and long lifespan.
- Precise torque is able to set from small to large, range stepless, stable, fast speed, easy operation and high working efficiency.
- Any screw and socket can be used. As fastening process reach pre-set torque, clutch will be automatically stopped as well.

### Specifications

Model	SKD-7000L	SKD-7000P	SKD-7200L	SKD-7200P	SKD-7800L	SKD-7800P	SKD-7800LF	SKD-7800PF
Input Voltage	DC24V or DC32V						DC32V	
Power Consumption	50W							
Torque	(kgf.cm)	5~18	7~24	8~30		2~10		
	(Lbf.in)	4.34~15.58	6.11~20.8	6.9~26.02		1.77~8.67		
	(N.m)	0.49~1.76	0.69~2.35	0.78~2.94		0.2~0.98		
Repeatable Torque Accuracy(%)	±3%							
Torque Adjustment	Stepless							
Free Speed (r.p.m)	HI	1000	750	530		2000		
	LO	700	520	350		-		
Screw Size Dia (mm)	Machine Screw	2.0~3.5	2.6~4.0	3.0~5.0		2.0~3.0		
	Tapping Screw	2.0~3.0	2.6~3.5	3.0~4.0		2.0~2.6		
Weight(g)	600							
Length(mm)	260							
ESD(Anti-Static)	✓ (with black housing)							
CE	✓							
RoHS	✓							
Power Controller	SKP-32HL-60W							
Bit Type								

### Accessories

<p>Torque Fixing Ring KC-2</p>	<p>Torque Adjuster KW-1</p>
<p>Suspension Rack KH-2</p>	<p>Spring Balancer KL-1200</p>
<p>90° Degree Attachment KL-1 (only "L" type)</p>	<p>Power Controller SKP-32HL-60W</p>