





LED

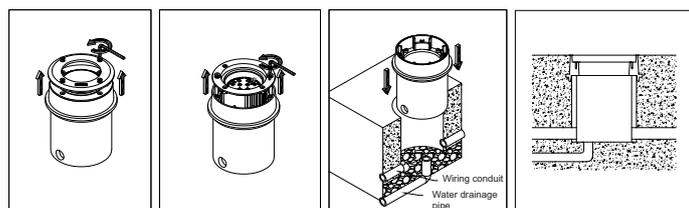

IN-GROUND LUMINAIRE PRGBB/CC/DD Series



≥0.5	70Ra	IP67	25,000 Hours	AC100 260V	50-60Hz
Power factor	CRI	Protection grade	Lifespan	Voltage	Frequency

Outstanding features

- Bridgelux/Osram
- High quality aluminium alloy heat sink
- Energy saving
- No mercury, environmentally friendly
- Dustproof & water-resistant
- Electrical safety assurance
- Easy installation and maintenance
- Compact and low-depth luminaire

SPECIFICATION AND PRICE

Model	PRGBB7L	PRGCC7L	PRGDD7L
LED chip	Bridgelux/Osram		
Wattage (W)	7W	7W	7W
Efficacy (Lm/W)	8	19	27
Lumen (Lm)	67	135	188
Color temperature (K)	3000		
Dimensions (mm) (WxH)	125x140	125x140	125x140
Operating temperature	-25~50°C		
Unit price (USD)	\$35.09	\$35.09	\$35.09

Suggested installation areas

- Public areas
- Landscape & facade
- Parks & gardens
- Apartment
- Residential area
- Walk and cycle path
- Internal road