


# 智能伺服电流控扭自动机用型

Intelligent servo current torque controlled automatic machine



## 外观尺寸 Physical dimension

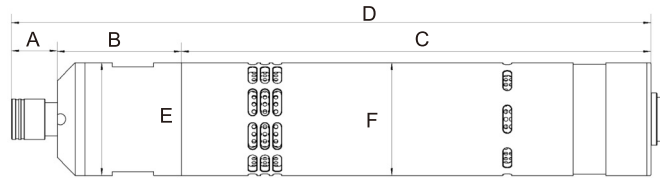

型号 Model	A	B	C	D	E	F
SD-NC350AT-AB-X2	16.7	45.3	171.5	233.5	41	41
SD-NC700AT-AB-X2	16.7	45.3	171.5	233.5	41	41
SD-NC1000AT-AB-X2	16.7	57.3	171.5	245.5	41	41
SD-NC1500AT-AB-X2	16.7	57.3	171.5	245.5	41	41
SD-NC2500AT-AB-X2	16.7	57.3	171.5	245.5	41	41
SD-NC4000AT-AW-X2	30	63.4	171.5	264.9	41	41
SD-NC6500AT-AW-X2	30	63.4	171.5	264.9	41	41

## 技术参数 Technical parameters

型号Model	扭力范围 Torque Range		空载转速 No load speed(r.p.m)	输入电压 Input voltage	重量 Weight(g)	标准批头 Screw bit
	kgf.cm	N.m				
自动机用 For automata						
SD-NC350AT-AB-X2	5-35	0.5-3.5	3000	48V	950	1/4-Hex
SD-NC700AT-AB-X2	10-70	1-7	2000		950	1/4-Hex
SD-NC1000AT-AB-X2	20-100	2-10	1000		1200	1/4-Hex
SD-NC1500AT-AB-X2	30-150	3-15	700		1200	1/4-Hex
SD-NC2500AT-AB-X2	50-250	5-25	500		1200	1/4-Hex
SD-NC4000AT-AW-X2	90-400	9-40	300		1500	3/8-Hex
SD-NC6500AT-AW-X2	130-650	13-65	200		1500	3/8-Hex