


47 SW-60 120 250 Series Stainless Steel Centrifugal Pump

SW-60 120 250 STAINLESS STEEL CENTRIFUGAL PUMP

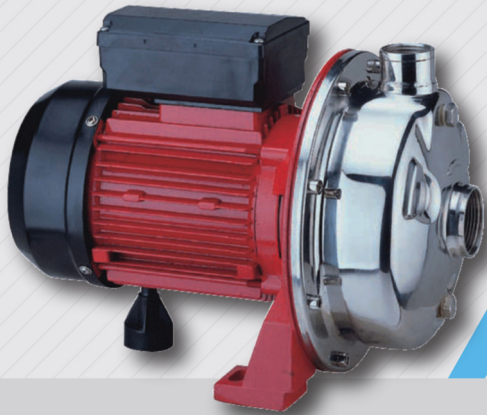

- Liquid temperature : 0~70°C / 32~158°F
- HP range : 1/2~2-1/2HP / 0.4~1.85KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection class : IP55
- Maximum suction : 8M

Features


1. Clean water: all the material contacting water is stainless steel.
2. Low noise: new designed vortex fan can reduce the noise.
3. Suitable for outdoor environment(IP55).
4. High quality mechanical seal can endure the high temperature up to 90°C. (SW-120S/250S)

Applications


1. Air conditioner cooling system
2. Industrial cleaning
3. Filtration system

Dimension

Model	Dimension									
	W	W1	L	L1	L2	H	H1	H2	DNA	DNM
SW-60	213	140	315	138	49	218	232	110	G1¼	G1
SW-120										
SW-120T	213	140	315	138	49	218	232	110	G1¼	G1
SW-120S										
SW-120ST										
SW-250										
SW-250T	213	140	354	138	49	255	222	110	G2	G1½
SW-250S										
SW-250ST										

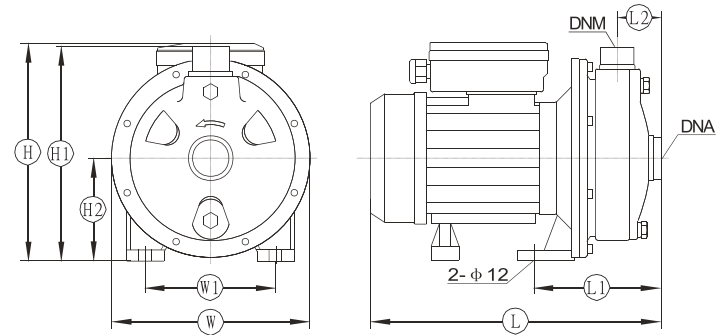

Curve

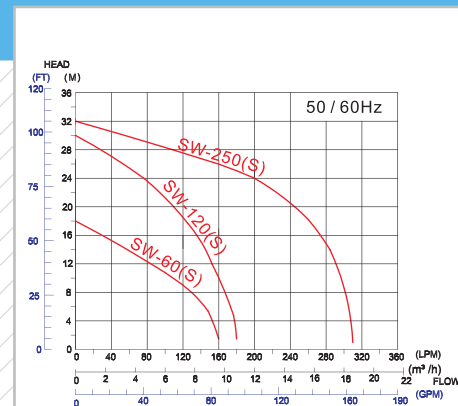

Specification

Model No.	Output		Inlet		Outlet		Pass Solid	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weigh Kg
	HP	W	mm	inch	mm	inch	Dia(mm)		5M	10M	15M	20M	25M			
SW-60	1/2	400	32	1-1/4"	25	1"	3	120	110	85	35	-	-	17	315 x 213 x 218	11
SW-120(S)	1 1/4	1000	32	1-1/4"	25	1"	3	140	138	135	125	110	65	28	360 x 245 x 275	15.5
SW-250(S)	2 1/2	1850	40	1-1/2"	32	1-1/4"	3	300	290	275	260	235	180	30	366 x 213 x 253	20

Remarks: Model No. ends with "S" is included with stainless steel strainer for hot water.