

# 25 SS Series Sewage Pumps

## SS SEWAGE PUMPS



- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/3~1HP / 250~750W
- PH : 5~9
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP68
- Maximum depth : 8M

### Features

1. The material is stainless steel which can endure light acid and alkali.
2. The waterproof material is all use VITON.
3. The shaft material is SUS316.
4. Motor-cooling design.

### Applications


1. Dyeing and finishing plant & Paint factory
2. Sewage and wastewater discharge containing chemicals

### Specification

Model No.	Output		Outlet		Pass Solid	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension	Weight
	HP	W	mm	inch	Dia(mm)		1.5M	3M	6M	9M	12M		L x W x H(mm)	Kg
SS-250	1/3	250	50	2"	7	220	215	197	130	-	-	9	181 x 181 x 340	12
SS-400	1/2	400	50	2"	7	240	237	225	180	100	-	11	181 x 181 x 340	12
SS-750	1	750	50	2"	7	300	295	280	240	185	110	15	181 x 181 x 343	15

Remarks: Model No. ends with "A" is equipped with float switch.

### Sectional View

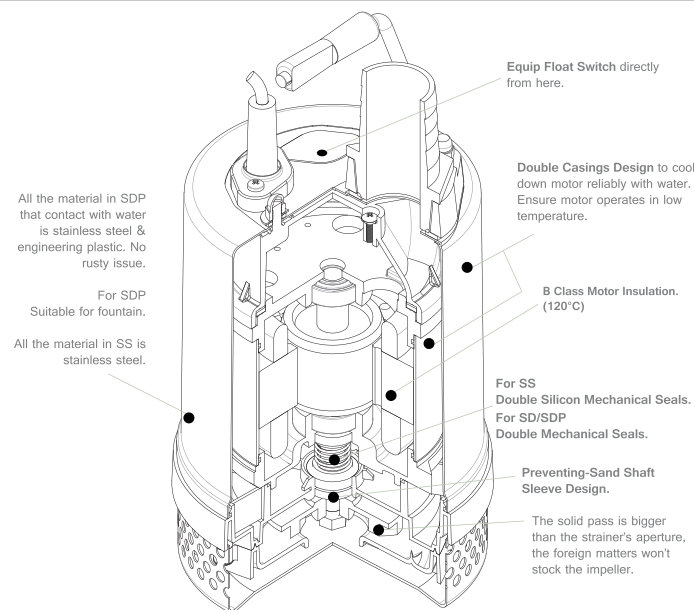


### Standard Accessories

Model No.	Accessories
SS-250	Flange
SS-400	Flange
SS-750	Flange



### Curve



### Dimension

Model	Dimension				
	W	H	H1	H2	G
	mm	mm	mm	mm	inch
SS-250	185	350	270	325	2
SS-400	185	350	255	325	2
SS-750	185	365	285	340	2

