




SURFACE OR SUSPENDED LUMINAIRE PPDA Series

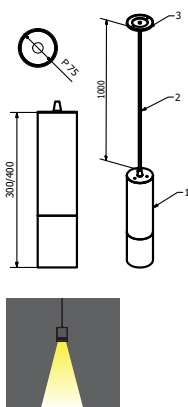

Note:

- Published lumen is total luminous flux of luminaire
- PF ≥ 0.9
- Lifespan: 50,000 hours
- CRI ≥ 80

≥ 0.9	80Ra	IP20	50,000 Hours	AC220 240V	50-60Hz
Power factor	CRI	Protection grade	Lifespan	Voltage	Frequency

Outstanding features

-  Bridgelux/Nichia
-  High quality aluminium alloy heat sink
-  3000K(Warm white) / 4200K(Neutral white) / 6500K(Cool daylight)
-  Easy installation and maintenance
-  Energy saving
-  Low glare
-  No UV radiation
-  Minimise blue light emission

SPECIFICATION AND PRICE

Model	PPDA300L10	PPDA400L15
LED chip	Bridgelux/Nichia	
Wattage (W)	10W	15W
Efficacy (Lm/W)	41	46
Lumen (Lm)	410	693
Color temperature (K)	3000/4200/6500	
Dimensions (mm) (WxH)	75x300 (cable length 1000mm)	75x400 (cable length 1000mm)
Installation	Suspended	
Unit price (USD)	\$48.17	\$72.48

Suggested installation areas



Apartment



Supermarket



Retail Store



Office



Hotel



School



Hospital