

17 SMP Series Swimming Pump

SMP SWIMMING PUMP



- Liquid temperature : 5~50°C / 41~122°F
- HP range : 1~3HP / 0.75~2.2KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP55
- Maximum suction : 1.5M

Features

1. No rusty issue.
2. Large flow design, efficient work.
3. Union design, easy to clean and install.
4. Pre-filter can filter some foreign matters at first.

Applications


1. Pool and SPA system
2. Aquaculture circulating water filtration

Specification


Model No.	Output		Outlet		Pass solid (mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	KW	mm	inch			3M	6M	9M	12M	15M			
SMP-10	1	0.75	40	1-1/2"	N/A	310	290	240	175	85	-	14	495 x 180 x 295	8.5
SMP-20	2	1.5	50	2"	N/A	460	450	415	350	250	100	16	700 x 295 x 420	18.5
SMP-30	3	2.2	50	2"	N/A	520	515	500	460	395	300	20	700 x 295 x 420	24.5

Dimension

Model	Dimension								
	W	W1	L	L1	L2	H	H1	H2	H3
	mm	mm	mm	mm	mm	mm	mm	mm	mm
SMP-10	160	122	465	298	215	234	215	100	151
SMP-20	283	180	684	456	288	362	355	160	263
SMP-30	283	180	684	456	288	362	355	160	263

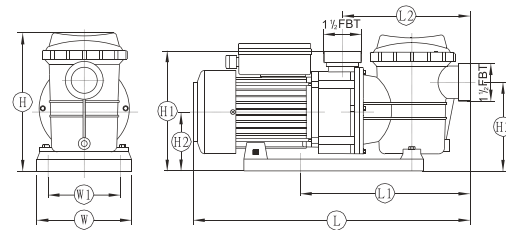

SMP-10

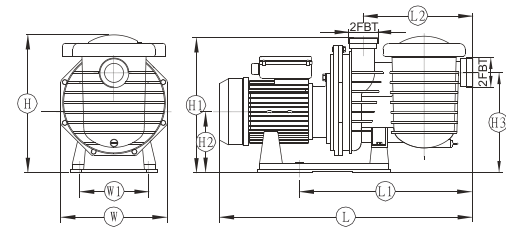

SMP-20 / 30

Standard Accessories

Model No.	Accessories
SMP-10	Hose connection
SMP-20	Hose connection
SMP-30	Hose connection



Curve

