

Molded Case Circuit Breakers

G-TWIN series

External accessories

Terminal covers

■ Description

These terminal covers are used as guards to prevent accidental touch with live line terminations. These terminal covers can be fitted to either line or load side.

● Up to 400AF

Short type: BW9BT □ A-S □

- Snap-on fitting


Long type: BW9BT □ A-L □

- Crimp connection use

● 630, 800AF

Long type: BW9BTJA-L □

- Transparent

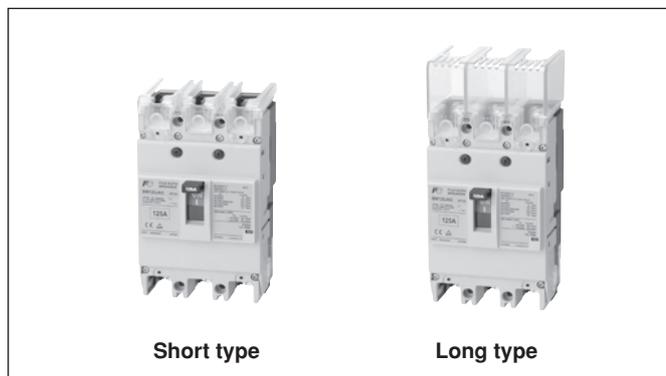

Long type


Type		No. of poles	MCCB	Dimensions (mm)			Packing quantity	Appearance
Transparent	Gray			A	B	C		
BW9BTAA-L2	BW9BTAA-L2W	2	BW32□-2P BW50□-2P BW63□-2P BW100□-2P	50	40	53	2	<ul style="list-style-type: none"> • Preventing exposure of live section when amplifier's terminals are connected • Snap-on mounting 
BW9BTAA-L3	BW9BTAA-L3W	2, 3	BW32□-3P BW50□-3P BW63□-3P BW100□-3P	75	40	53	2	
BW9BTCA-L2	BW9BTCA-L2W	2	BW125JAG-2P	60	40	66.5	2	
BW9BTCA-L3	BW9BTCA-L3W	2, 3	BW125JAG-3P BW125RAG-2P BW125RAG-3P	90	40	66.5	2	
BW9BTCA-C3	—	2, 3	BW125RAG-2P BE125□-3P	90	60	66.5	2	
BW9BTCA-L4	BW9BTCA-L4W	4	BW125JAG-4P BW125RAG-4P	120	40	66.5	2	
BW9BTGA-L3 *1	BW9BTGA-L3W *1	2, 3	BW160□-2P BW160□-3P	105	50	66.5	2	
BW9BTGA-L4 *1	BW9BTGA-L4W *1	4	BW160□-4P	140	50	66.5	2	
BW9BTGA-C3	—	2, 3	BW250□-2P BW250□-3P	105	75	66.5	2	
BW9BTGA-L3 *1	BW9BTGA-L3W *1	2, 3	BW250□-2P BW250□-3P	105	50	66.5	2	
BW9BTGA-L4 *1	BW9BTGA-L4W *1	4	BW250□-4P	140	50	66.5	2	
BW9BTHA-L3 *2	BW9BTHA-L3W *1	2, 3	BW400□-2P BW400□-3P	172	110	98	2	
BW9BTHA-L4 *2	—	4	BW400□-4P	220	110	98	2	
BW9BTJA-L3	BW9BTJA-L3W	3	BW630□-3P BW800□-3P	230	135	97.5	2	
BW9BTJA-L4	BW9BTJA-L4W	4	BW630□-4P BW800□-4P	280	155	98	2	

Molded Case Circuit Breakers

G-TWIN series

External accessories

Short type

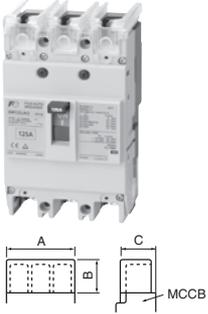Type		No. of poles	MCCB	Dimensions (mm)			Packing quantity	Appearance
Transparent	Gray			A	B	C		
BW9BTAA-S2	BW9BTAA-S2W	2	BW32□-2P BW50□-2P BW63□-2P BW100□-2P	50	10	53	2	<ul style="list-style-type: none"> Preventing exposure of live section when amplifier's terminals are connected Snap-on mounting 
BW9BTAA-S3	BW9BTAA-S3W	2, 3	BW32□-3P BW50□-3P BW63□-3P BW100□-3P	75	10	53	2	
BW9BTCA-S2	BW9BTCA-S2W	2	BW125JAG-2P	60	8	66.5	2	
BW9BTCA-S3	BW9BTCA-S3W	2, 3	BW125JAG-3P BW125RAG-2P BW125RAG-3P	90	8	66.5	2	
BW9BTCA-S4	BW9BTCA-S4W	4	BW125JAG-4P BW125RAG-4P	120	8	66.5	2	
BW9BTGA-S3 * ¹	BW9BTGA-S3W * ¹	2, 3	BW160□-2P BW160□-3P BW250□-2P BW250□-3P	105	8	66.5	2	
BW9BTGA-S4 * ¹	BW9BTGA-S4W * ¹	4	BW160□-4P BW250□-4P	140	8	66.5	2	
BW9BTHA-S3 * ³	BW9BTHA-S3W * ²	2, 3	BW400□-2P BW400□-3P	140	65	98	2	
BW9BTHA-S4 * ³	BW9BTHA-S4W * ²	4	BW400□-4P	185	65	98	2	

Notes: • A gray-white terminal cover comes standard with the Global Series 125AF and 250AF.

*¹ When using the external operating handle, part of the terminal cover () must be cut away.

*² Crimp terminals for 325 mm² are not available.

*³ This type of cover can be mounted on the 400AF when flat terminals are not used.

