

M Type

The Advanced HMI M Type adopts a wide screen and narrow frame design. It supports Ethernet communication and multilingual inputs, and offers multimedia functions to meet diverse requirements.



Product Introduction

Features

- Multiple size options: 12" / 15"
- High-performance CPU: Cortex-A7 Dual Core
- Highly integrated design: Built-in 2 Ethernet ports, 4 serial communication ports (D-Sub x 2), USB, SD card slot, and more.
- Multi-language input: Supports 16 languages, applicable for recipe parameters and account input

Supported Languages		
☐ English	☐ Japanese -- ☐ (Only Halfwidth)	☐ Spanish
☐ Traditional Chinese	☐ Korean	☐ Portuguese
☐ Simplified Chinese	☐ Thai	☐ Vietnamese
☐ French	☐ Hindi	☐ Italian
☐ German	☐ Turkish	☐ Polish
☐ Russian	☐ Arabic	
	☐ Persian	

- Multimedia Functions: Supports Analog / IP Camera, Video Play and VGA Input



Applications


Machinery and equipment in various sectors such as packaging, textiles, woodworking, rubber, and plastics

Product Specifications

	DOP-112MX	DOP-115MX
Display	12" TFT	15" TFT
Resolution (Pixels)	1,024 x 768	
Color	24-bit	
CPU	Cortex-A7 Dual Core 1 GHz	
ROM	8 GB	
RAM	1 GB	
Ethernet	2 Ports	
COM Port	4 Serial COM Ports	
Software Function	Multi-Language Input, Multimedia	
USB	1 Mini Slave / 1 Host	
SD	SD x 1	
Certification	CE / UL	
Operating Temperature	0 ~ 50°C	
Storage Temperature	-20 ~ 60°C	

Dimensions

DOP-115MX

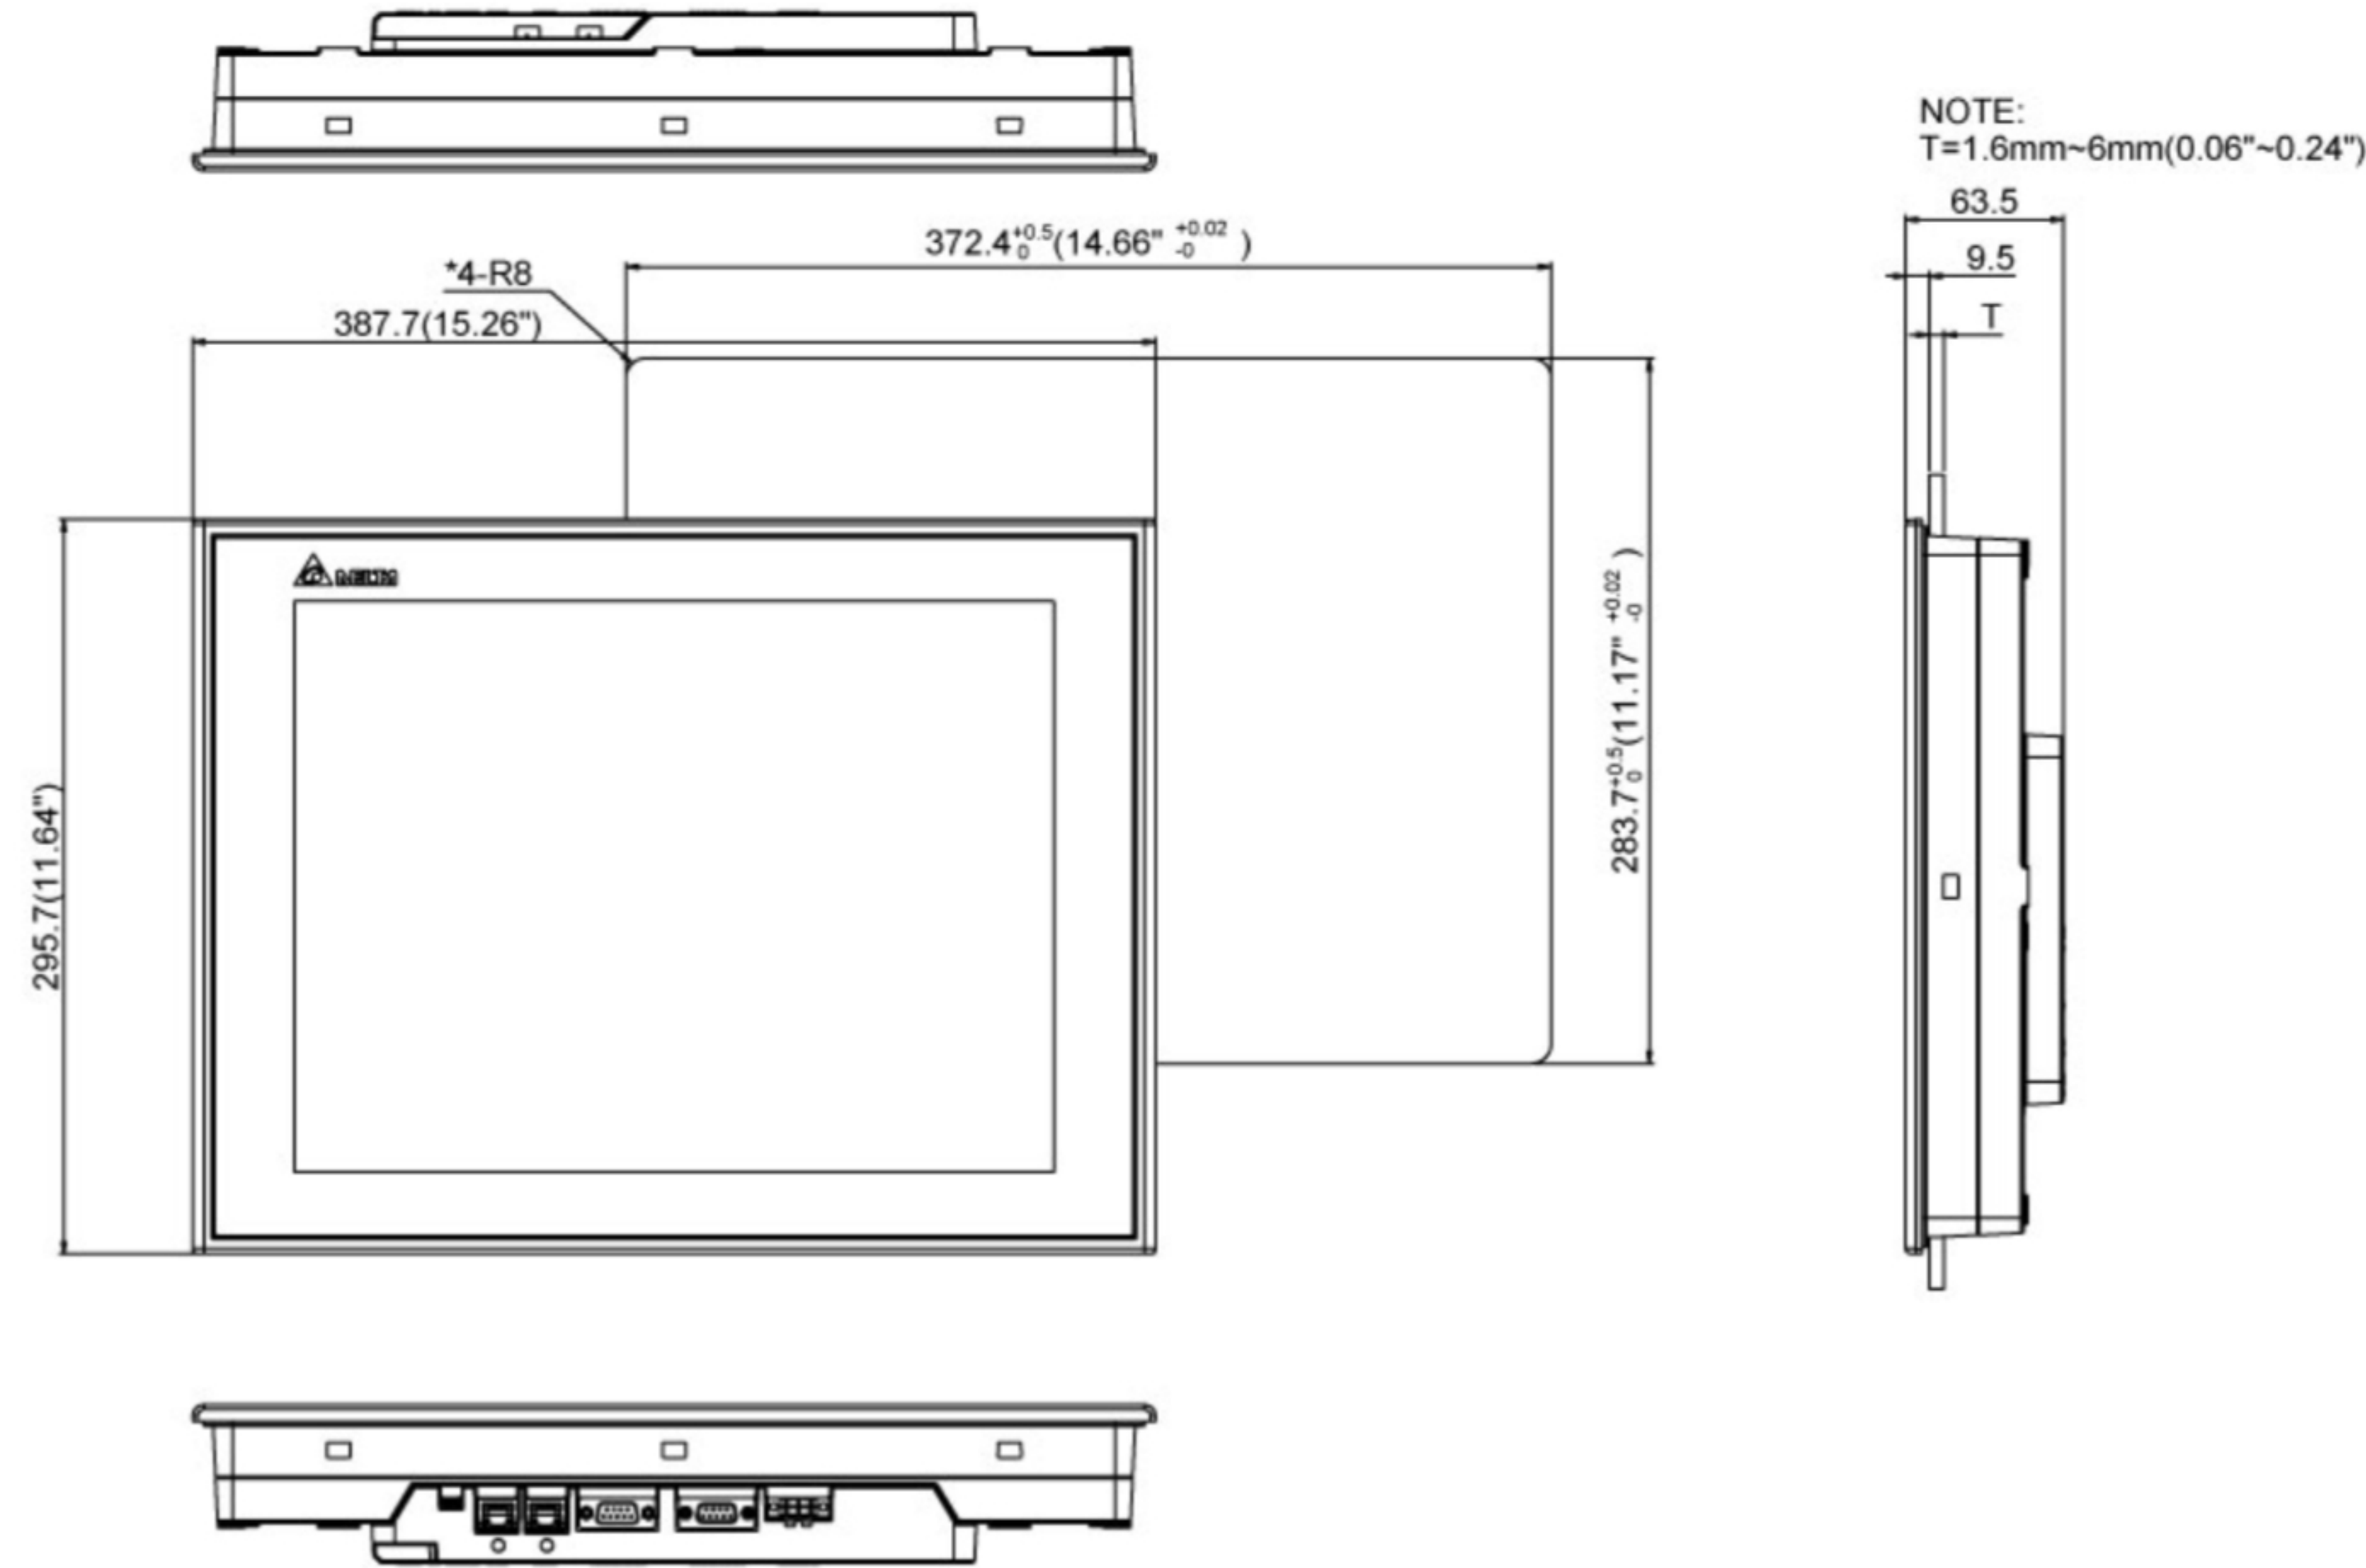

	Dimensions (W x H x D, mm)	Mounting Dimensions (W x H, mm)
DOP-112MX	317.4 x 246.4 x 52.7	302.7 x 228.7
DOP-115MX	387.7 x 295.7 x 63.5	372.4 x 283.7