


STA35SLM

Ø35mm Slim LED Tower Lights




STA35SLM



Technical Diagram (Units : mm)

STA35SLM

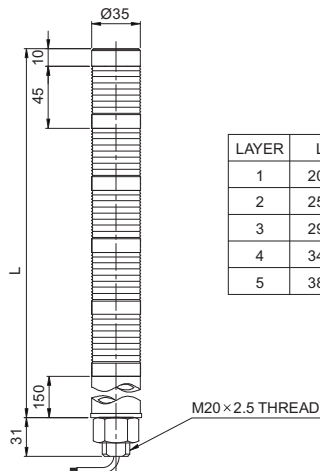

STA35SLM Ø35mm Direct Mount LED Steady Tower Lights

- Ø35mm direct mount tower lights
- Aesthetically pleasing design with aluminum housing
- Fixed layer designs provides superior durability
- Excellent visibility by using a high brightness LED with a special diffusion lens
- Lens maintains a semi-transparent color when not emitting the specific color of the signal under operation.
- Steady mode only (can operate flashing mode with external control) with fixed user selected color arrangement
- Easy mounting with the bolts/ screws located at the bottom of the product
- Materials : Lens-AS, Housing-Al
- Ambient operating temperature : -30°C to +50°C
- Protection rating : IP44



Specifications

| Model number | Layer | Voltage | Current | Certificates | Weight | Color |
|-----------------|-------|--|--------------------------------------|------------------|--------|--|
| STA35SLM Steady | 1 | AC/DC12V AC/DC24V AC110V AC220V | 0.100A 0.050A 0.020A 0.020A | CE DC24V only | 2.85kg | • R-Red |
| | 2 | AC/DC12V AC/DC24V AC110V AC220V | 0.200A 0.100A 0.040A 0.040A | | 3.04kg | • R-Red • G-Green |
| | 3 | AC/DC12V AC/DC24V AC110V AC220V | 0.300A 0.150A 0.060A 0.060A | | 3.17kg | • R-Red • A-Amber • G-Green |
| | 4 | AC/DC12V AC/DC24V AC110V AC220V | 0.400A 0.200A 0.080A 0.080A | | 3.43kg | • R-Red • A-Amber • G-Green • B-Blue |
| | 5 | AC/DC12V AC/DC24V AC110V AC220V | 0.500A 0.250A 0.100A 0.100A | | 3.58kg | • R-Red • A-Amber • G-Green • B-Blue • W-White |



Wiring Instructions

- External power line and signal line standard : UL1007 AWG22(0.3sq) 400mm
- ※ Please refer to page 258 for detailed wiring instructions.



Customization

- Wall mount bracket options : Used for mounting on the vertical surface



Wall Mount Bracket
STAWB25



Ordering Specification

| | | | | | | |
|-----------------|---|--|---|--|---|--|
| STA35SLM | - | 3 | - | 220 | - | RAG |
| [Model number] | | [Layer] | | [Voltage] | | [Color] |
| • STA35SLM | | • 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers | | • 12-DC12V • 24-DC12V • 110-AC110V • 220-AC220V | | • R-Red • A-Amber • G-Green • B-Blue • W-White |



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar



Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights



Wireless
Network
System



Electric Horn/
Speakers



Industrial
LED Lights