# E8Y

# Micropressure Sensor with Easy-to-Read Digital Display

- Repeat accuracy of ±1% FS (setting resolution: 0.01 kPa), high-precision pressure control available.
- Compact design  $(31 \times 30 \times 30 \text{ mm})$  saves mounting space.
- Easy-to-read red LED indicator.
- Analog current output models available (E8Y-A□Y).
- Pressure port Rc (PT) 1/8 models available (-R).
- EN and UL approved.



# **Ordering Information**

### Pressure Sensors

Sensing Guide Pressure

Sensors
Other
Information

Sensors

Pressure range *	Digital output	Linear output	Model	
0 to 200 Pa			E8Y-AR2C	
0 to 500 Pa	NPN open collector		E8Y-AR5C	
0 to 2.00 kPa			E8Y-A2C	
0 to 5.00 kPa			E8Y-A5C	
0 to 200 Pa			E8Y-AR2Y	
0 to 2.00 kPa		4 to 20 mA	E8Y-A2Y	
0 to 5.00 kPa			E8Y-A5Y	
0 to 5.00 kPa	PNP open collector		E8Y-A5B	

Note: Order the optional E89-Y1 Panel-mounting Bracket.

A model number ending in -R indicates the pressure port is die-cast for Rc (PT) 1/8 models.

# **Accessories (Order Separately)**

Panel Attachment Parts Set (For □36 and □45 Models)

Model		
E89-Y1 *		

 $\ensuremath{^{\star}}$  Includes the cover, guide, frame, and holder.

E8F2 E8MS /E8M

E8Y-□-F□

# Ratings

Item	Model	E8Y-AR2C	E8Y-AR5C	E8Y-A2C E8Y-A2C-R	E8Y-A5B E8Y-A5C E8Y-A5C-R	E8Y-AR2Y	E8Y-A2Y E8Y-A2Y-R	E8Y-A5Y E8Y-A5Y-R	
Power s	supply voltage	12 to 24 VDC ±	12 to 24 VDC ±10% with a ripple (p-p) of 10% max.						
Current	consumption	50 mA max.				75 mA max.			
Pressur	e type	Differential pressure							
Rated pressure range		0 to 200 Pa	0 to 500 Pa	0 to 2.00 kPa	0 to 5.00 kPa	0 to 200 Pa	0 to 2.00 kPa	0 to 5.00 kPa	
Withstand pressure		5 kPa		50 kPa		5 kPa	5 kPa		
Applicable fluid		Non-corrosive gas and non-flammable gas							
	Output current					4 to 20 mA			
Linear	Permissible load resistance					0 to 250 Ω			
output	Precision					±2.5%FS	±1.0%FS		
	Linearity					±2.5%FS	±1.0%FS		
	Output form	NPN open collector (NO/NC) *							
Digital output	Load current	100 mA							
	Output applied voltage	30 VDC max.							
	Residual voltage	1.0 V max. with a load current of 100 mA or 0.4 V max. with a load current of 16 mA							
	Repeat accuracy	±2.5%FS	±1.0%FS			±2.5%FS	±1.0%FS		
Dis-	Display	3-digit 7-segment red LED							
play	Indicator lamp	Orange LED indicator (OUT1: lit when digital output is ON) Orange LED indicator (OUT2: lit when digital output is ON)							
Respon	se speed	0.5 s max.							
Display	accuracy	±1.0%FS							
Setting resolution 1 Pa			0.01 kPa		1 Pa	0.01 kPa			
Protecti	ion circuits	Reverse polarity protection, load short-circuit protection							
Ambien	t temperature	Operating: -10	to 55°C (with no	icing)					
Ambien	t humidity	Operating: 25%	to 85% (with no	condensation)					
Storage	temperature	–25 to 65°C							
Access	ories	Mounting Brackets (A and B), Instruction manual							

<sup>\*</sup> The E8Y-A5B provides a PNP open-collector (NO/NC) output.

# **Specifications**

Temperature influence	E8Y-A2C/A5C: ±3%FS max. E8Y-AR5C: ±6%FS max. E8Y-AR2C: ±10%FS max.			
Humidity influence	E8Y-A2C/A5C: ±3%FS max. E8Y-AR5C: ±6%FS max. E8Y-AR2C: ±10%FS max.			
Degree of protection	IP40 (IEC)			
Dielectric strength	1,000 VAC at 50/60 Hz for 1 minute			
Insulation resistance	100 M $\Omega$ min. (at 500 VDC) between current-carrying parts and case			
Vibration resistance	Destruction: 10 to 150 Hz, 0.75-mm single amplitude or 100 m/s², 4 times each for 8 min in X, Y and Z directions			
Shock resistance	Destruction: 300 m/s² 3 times each in X, Y and Z directions			
Pressure port	4.5-dia resin pipe or Rc (PT) 1/8 taper screw (-R type)			
Cable	Vinyl-insulated round cable 4 dia., Standard length: 2 m			
Weight	Approx. 80 g			

Sensing Guide

Pressure Sensors


Other Information

E8F2 E8MS /E8M

E8Y

E8Y-□-F□

# **Nomenclature**



### **Display**

# (1) Numerical value/menu indication

Displays the measured pressure and some menu settings.

# (1) (2) Unit

Shows the measuring unit. Unit currently in use is illuminated.

# (3) OUT 1 indication LED

In measurement mode, it lights when OUT 1 output is on. In setting mode, it flashes when OUT 1 is being set.

### (4) OUT 2 indication LED

In measurement mode, it lights when OUT 2 output is on. In setting mode, it flashes when OUT 2 is being set.

# **Operation Key**

### (5) ADJ

In measurement mode, it adjusts the Zero Point.

In setting mode, it shifts to measurement mode.

# (6) MODE

In measurement mode, it shifts to setting mode and selects the current setting or menu option.

### (7) UP/DOWN

In measurement mode, pushing the DOWN key displays the ON and OFF points of OUT 1; pushing the UP key displays the ON and OFF points of OUT 2.

In setting mode, the UP and DOWN keys increase or decrease the numeric value, respectively, or scroll through the menu options.

**Dimensions** (Unit: mm)

Pressure Sensors

# Sensing Guide


Pressure Sensors


Other Information

# Standard Port Type (Pressure Port: 4.5 dia.)

E8Y-AR5C E8Y-AR2C E8Y-A2C E8Y-A5C E8Y-A5B E8Y-AR2Y E8Y-A2Y E8Y-A5Y


**Sensors** 




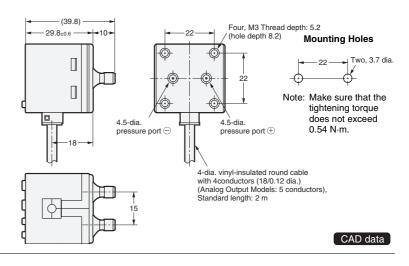

# Die-case Port Type (Pressure port: Rc(PT)1/8)

E8Y-A2C-R E8Y-A5C-R E8Y-A2Y-R E8Y-A5Y-R



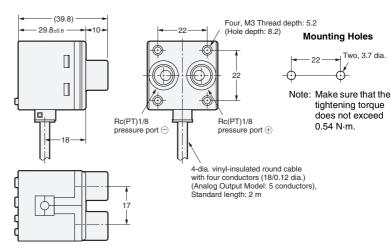

E8F2
E8MS
/E8M
E8Y

# **Accessories (Provided)**

# Mounting Bracket A Mounting Bracket B Mounting Bracket B

Refer to the E8Y Pressure Sensor Datasheet (Cat. No. F045) for details.

Pressure Sensors

Sensing Guide

Other Information

> E8F2 E8MS /E8M

E8Y

E8Y-□-F□

Cat. No. F833-E1-01

In the interest of product improvement, specifications are subject to change without notice.

# Terms and Conditions Agreement

# Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

# Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE

PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See http://www.omron.com/global/ or contact your Omron representative for published information.

# Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

# Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

# Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

# Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

<u>Errors and Omissions.</u> <u>Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is accurate.</u> assumed for clerical, typographical or proofreading errors or omissions.

2013.12

In the interest of product improvement, specifications are subject to change without notice.

