


## SV series

- Material
- Insulation: Vinyl
- Terminal Body: Copper or brass
- Plating: Tin

CE ISO9001

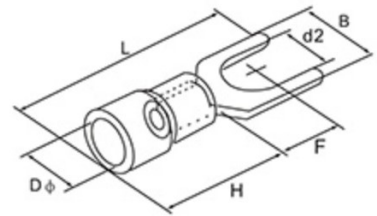

Item NO.	Wire section area	AWG	Screw dia.	Dimension					Color
			d2(mm)	B	L	F	H	D φ	
				(mm)	(mm)	(mm)	(mm)	(mm)	
SV1.25-3	0.5~1.5mm <sup>2</sup> (22-16AWG) I <sub>max</sub> =19A	#4	3.2	5.7	21.2	6.5	10	4.3	Red Blue Yellow Black
SV1.25-3.5		#6	3.7	5.7	21.2	6.5			
SV1.25-4		#8	4.3	6.4	21.2	6.5			
SV1.25-5		#10	5.3	8.1	21.2	6.5			
SV1.25-6		1/4	6.5	9.5	21.2	6.5			
SV2-3	1.5~2.5mm <sup>2</sup> (16~14AWG) I <sub>max</sub> =27A	#4	3.2	5.7	21.2	6.5	10	4.9	Blue Red Yellow
SV2-3.5		#6	3.7	5.7	21.2	6.5			
SV2-4		#8	4.3	6	21.2	6.5			
SV2-5		#10	5.3	8.1	21.2	6.5			
SV2-6		1/4	6.5	9.5	21.2	11			
SV3.5-4	2.5~4mm <sup>2</sup> (14~12AWG) I <sub>max</sub> =37A	#8	4.3	8	24.8	7	12.5	6.2	Red Blue Yellow Black
SV3.5-5		#10	5.3	8	24.8	12.1			
SV3.5-6		1/4	6.5	12	28	7.5			
SV5.5-3.5	4~6mm <sup>2</sup> (12~10AWG) I <sub>max</sub> =48A	#6	3.7	8.3	25.2	7.5	12.5	6.7	Blue Red Yellow
SV5.5-4		#8	4.3	8.3	25.2	7.5			
SV5.5-5		#10	5.3	9	23.9	7.5			
SV5.5-6		1/4	6.5	9	23.9	7.5			
SV5.5-8		5/16	8.4	14	30	11.5			